

Sadie LED Outdoor Sconce SADW Series

+



DATE

QUANTITY

FIXTURE TYPE



Features

Ideal use for security and general lighting in outdoor residential, commercial, and hospitality applications. Fixture mounts to a standard junction box (not included).

Construction

Die-cast aluminum construction with durable powder coat finish. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

All metal parts are painted Black or Textured Grey.

Diffuser

Frosted glass diffuser.

Electrical

Input 120 VAC / 60 Hz. Compatible with residential TRIAC and ELV dimmers Minimum starting temp -4 $^{\circ}$ F/ -20 $^{\circ}$ C.

LED

Integrated LED modules capable of producing: 12W = 1100 source lumens, 450 delivered lumens 24W = 2200 source lumens, 900 delivered lumens 3000K (CCT). Rated for 50,000 Hrs., 90 CRI.


Certification

All fixtures are cETLus listed for wet locations. Title 24/JA8 Compliant (outdoor only).

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.


Specifications and dimensions subject to change without notice.

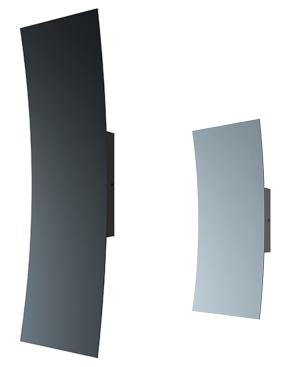

LOCATION PREPARED

COMMENTS

CATALOG NUMBER



Ordering Information:

Black	Textured Grey	LED	Source Lumens	Delivered Lumens		Н	W	D
	SADW0512L30D1TG		1100	450	3000K			2-1/4"
SADW05181 30D1RK	SADWO518L ZOD1TG	2/1/1/	2200	900	3000K	12"	5"	2-3///