
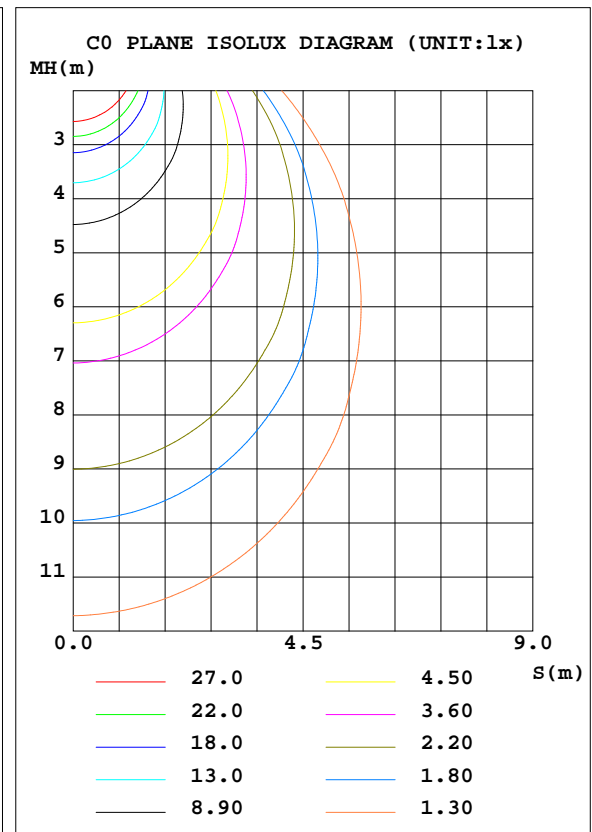


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 32.91 lm/W			
MODEL	NVV5252400L30D1SN	I <sub>max</sub> (cd)	182.5	S/MH(C0/180)	1.25
NOMINAL POWER(W)	32	LOR(%)	100.0	S/MH(C90/270)	1.46
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1052.6	η UP, DN(C0-180)	11.1, 38.4
NOMINAL FLUX(lm)	1052.55	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	10.8, 39.6
LAMPS INSIDE	1	η up(%)	21.9	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120.8	η down(%)	78.1	CIBSE SHR MAX	1.55

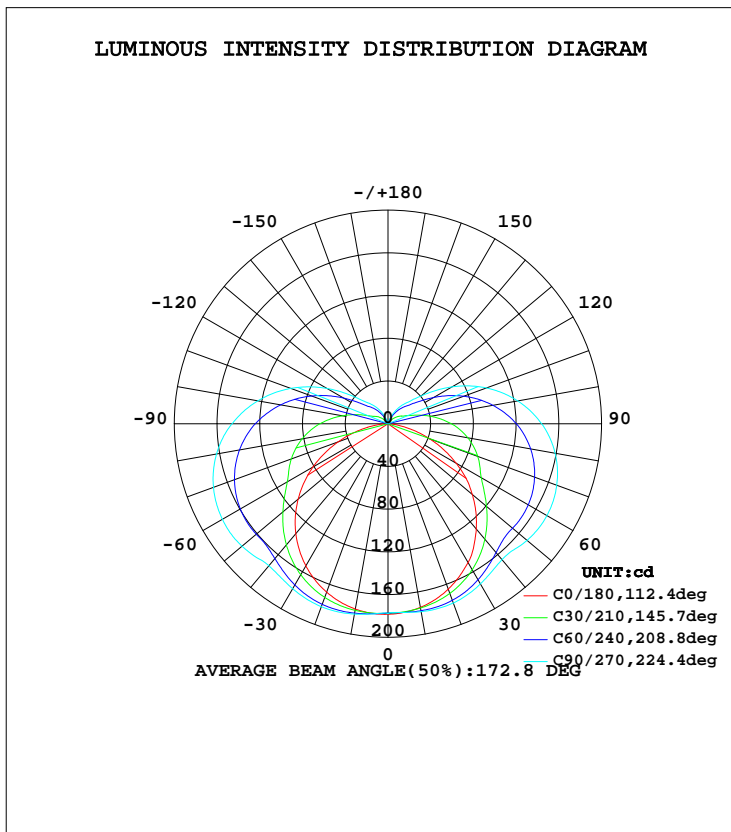


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

ZONAL FLUX DIAGRAM  
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	lum, lamp
5	177.3	177.1	177.3	176.2	178.0	178.3	178.8	177.1	0- 5	4.235	4.235	0.40,0.40
10	174.6	176.6	178.6	176.2	176.2	178.9	180.9	177.3	5- 10	12.68	16.92	1.61,1.61
15	170.5	175.4	179.3	175.5	172.7	178.5	182.3	176.8	10- 15	20.96	37.88	3.6,3.6
20	164.9	173.0	178.6	173.5	167.8	176.8	182.3	174.8	15- 20	28.84	66.72	6.34,6.34
25	157.9	169.1	176.5	170.2	161.5	173.7	180.9	171.4	20- 25	36.07	102.8	9.77,9.77
30	150.1	163.8	173.2	165.6	153.8	169.3	178.4	166.7	25- 30	42.41	145.2	13.8,13.8
35	140.0	157.3	169.2	159.4	144.6	163.5	175.4	160.8	30- 35	47.69	192.9	18.3,18.3
40	128.6	149.8	166.1	152.2	134.3	156.7	173.5	153.8	35- 40	51.85	244.7	23.3,23.3
45	116.4	141.8	166.8	144.7	122.7	149.4	176.0	146.9	40- 45	55.10	299.8	28.5,28.5
50	103.1	134.9	169.9	137.7	109.8	143.0	178.4	141.4	45- 50	57.84	357.7	34.34
55	89.44	131.2	171.6	133.6	95.97	139.5	179.6	139.1	50- 55	59.97	417.7	39.7,39.7
60	73.53	129.0	171.9	131.8	81.14	136.9	179.0	136.3	55- 60	61.26	478.9	45.5,45.5
65	57.68	125.7	170.8	128.9	65.61	133.0	177.2	132.5	60- 65	61.61	540.5	51.4,51.4
70	41.78	121.3	168.1	124.8	49.71	128.2	173.9	127.5	65- 70	61.02	601.6	57.2,57.2
75	26.48	115.9	164.2	119.7	34.02	122.2	169.2	121.4	70- 75	59.49	661.0	62.8,62.8
80	13.01	109.5	158.9	113.7	19.46	115.1	163.0	114.3	75- 80	57.05	718.1	68.2,68.2
85	3.477	102.1	152.1	106.4	7.562	107.0	155.3	106.0	80- 85	53.77	771.9	73.3,73.3
90	0.5646	93.64	143.8	98.36	1.035	97.85	145.9	96.77	85- 90	49.75	821.6	78.1,78.1
95	0.5079	84.05	134.3	89.11	0.4037	87.47	135.5	86.43	90- 95	45.03	866.6	82.3,82.3
100	0.4818	73.63	123.4	78.84	0.4038	76.21	123.8	75.26	95-100	39.81	906.5	86.1,86.1
105	0.4948	62.56	111.3	67.82	0.4169	64.28	111.0	63.28	100-105	34.29	940.7	89.4,89.4
110	0.5469	51.11	98.14	56.28	0.4602	52.02	96.94	50.99	105-110	28.64	969.4	92.1,92.1
115	0.6120	39.89	84.04	44.58	0.5124	39.88	81.97	39.08	110-115	23.09	992.5	94.3,94.3
120	0.6899	30.17	69.18	33.32	0.5860	28.61	66.34	28.93	115-120	17.87	1010	96.96
125	0.7767	23.35	54.30	25.21	0.6774	21.74	50.92	22.73	120-125	13.26	1024	97.2,97.2
130	0.8720	19.49	40.75	19.61	0.7640	17.83	37.31	19.43	125-130	9.500	1033	98.2,98.2
135	0.9766	15.95	31.01	15.21	0.8379	13.76	28.47	16.09	130-135	6.789	1040	98.8,98.8
140	1.111	12.24	24.72	11.24	0.9030	9.919	23.55	12.16	135-140	4.889	1045	99.3,99.3
145	1.124	8.441	19.46	7.563	0.9593	6.358	18.48	8.338	140-145	3.391	1048	99.6,99.6
150	1.172	4.675	14.09	4.430	1.033	3.427	13.26	4.568	145-150	2.141	1050	99.8,99.8
155	1.220	1.542	8.590	1.788	1.099	1.185	7.963	1.415	150-155	1.173	1051	99.9,99.9
160	1.263	1.463	3.368	1.294	1.168	1.163	2.964	1.332	155-160	0.5176	1052	99.9,99.9
165	1.511	1.710	1.298	1.333	1.485	1.224	1.120	1.597	160-165	0.2343	1052	100,100
170	1.550	1.554	1.315	1.589	1.511	1.519	1.225	1.458	165-170	0.1723	1052	100,100
175	1.571	1.571	1.289	1.580	1.554	1.554	1.254	1.519	170-175	0.1084	1053	100,100
180	1.580	1.294	1.558	1.558	1.589	1.576	1.298	1.558	175-180	0.0361	1053	100,100
DEG	LUMINOUS INTENSITY:cd MAX (Ii - Iavg)/Iavg (0-135) = 99.6 %									UNIT:lm		

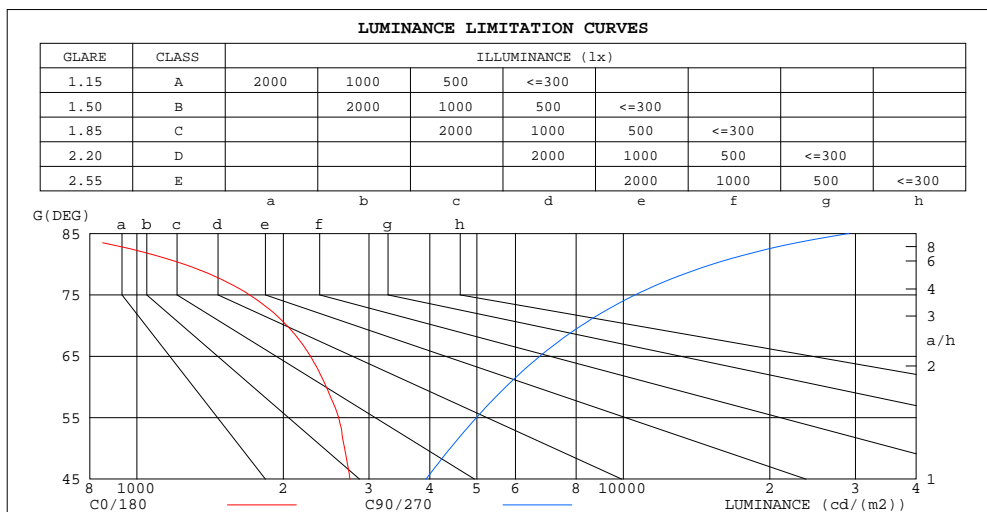

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	665	29094
80	1249	15248
75	1705	10572
70	2036	8194
65	2275	6735
60	2451	5730
55	2599	4988
50	2674	4406
45	2742	3931


C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25DEG  
Operators: luominxian  
Test Date: 2017-08-01

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
Humidity: 70%  
Test Distance: 8.250m [K=1.0000]  
Remarks: 壁灯

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.14	1.14	1.14	1.09	1.09	1.09	.99	.99	.99	.90	.90	.90	.82	.82	.82	.78
1.0	.93	.87	.82	.88	.83	.78	.80	.76	.72	.72	.69	.66	.65	.62	.60	.56
2.0	.79	.70	.63	.75	.67	.61	.68	.61	.56	.61	.56	.51	.55	.51	.47	.43
3.0	.68	.58	.51	.64	.56	.49	.58	.51	.45	.52	.47	.42	.47	.42	.38	.35
4.0	.59	.49	.42	.56	.47	.40	.51	.43	.37	.46	.40	.35	.41	.36	.32	.29
5.0	.52	.43	.35	.50	.41	.34	.45	.38	.32	.41	.34	.29	.37	.31	.27	.24
6.0	.47	.37	.30	.45	.36	.29	.41	.33	.27	.37	.30	.25	.33	.28	.23	.21
7.0	.42	.33	.26	.40	.32	.25	.37	.29	.24	.33	.27	.22	.30	.25	.20	.18
8.0	.38	.29	.23	.37	.28	.22	.33	.26	.21	.30	.24	.20	.28	.22	.18	.16
9.0	.35	.26	.21	.33	.25	.20	.31	.24	.19	.28	.22	.17	.25	.20	.16	.14
10.0	.32	.24	.18	.31	.23	.18	.28	.21	.17	.26	.20	.16	.24	.18	.15	.13

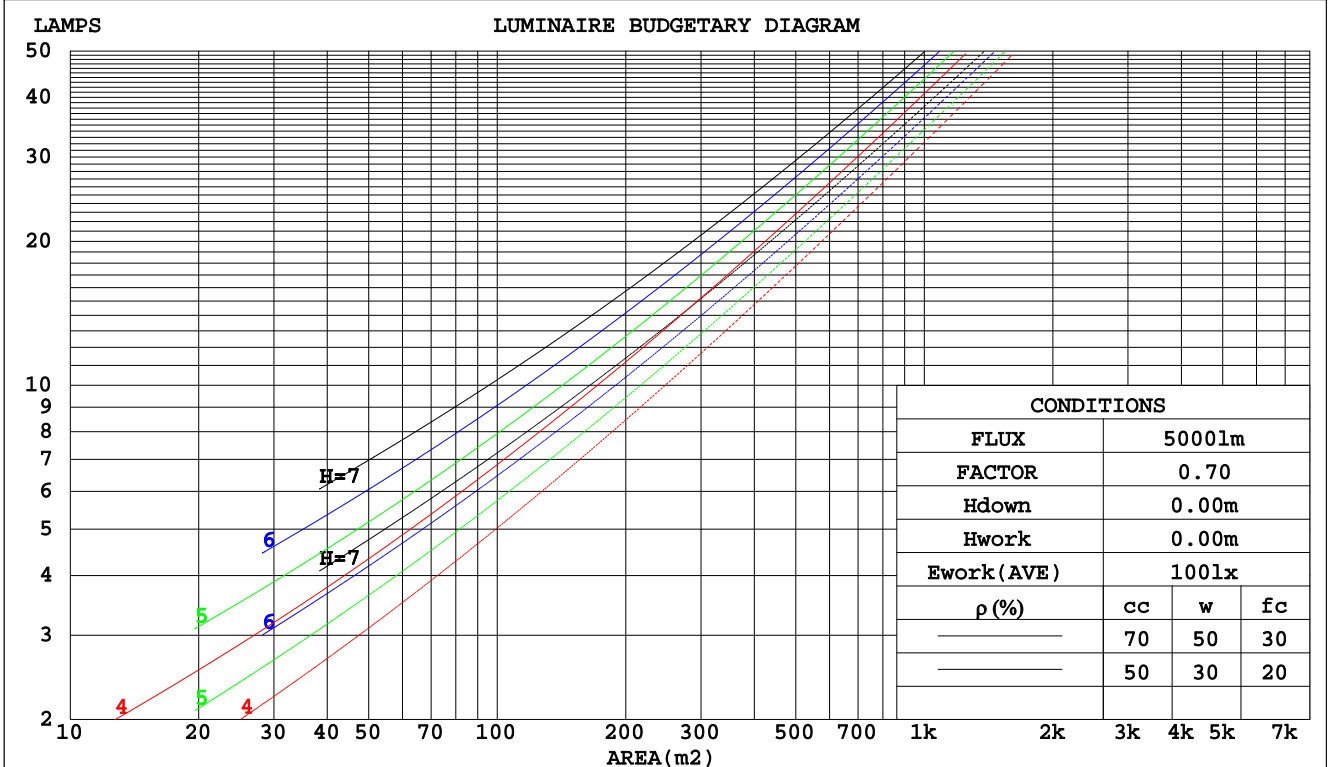

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

WEC AND CCEC

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.420	.239	.076	.406	.232	.074	.380	.218	.070	.356	.205	.066	.334	.193	.062	
2.0	.354	.194	.060	.342	.188	.058	.318	.177	.055	.296	.166	.052	.276	.156	.049	
3.0	.310	.165	.049	.299	.160	.048	.277	.150	.046	.257	.141	.043	.239	.132	.041	
4.0	.277	.144	.042	.266	.139	.041	.247	.131	.039	.228	.123	.037	.211	.115	.035	
5.0	.250	.127	.037	.240	.123	.036	.222	.116	.034	.206	.109	.032	.190	.102	.031	
6.0	.228	.114	.033	.219	.111	.032	.203	.104	.030	.187	.097	.029	.173	.091	.027	
7.0	.209	.103	.029	.201	.100	.029	.186	.094	.027	.172	.088	.026	.159	.083	.024	
8.0	.193	.094	.027	.186	.092	.026	.172	.086	.025	.159	.081	.023	.147	.076	.022	
9.0	.180	.087	.024	.173	.084	.024	.160	.079	.022	.148	.074	.021	.137	.070	.020	
10.0	.168	.080	.022	.162	.078	.022	.150	.073	.021	.139	.069	.020	.128	.065	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.358	.358	.358	.306	.306	.306	.209	.209	.209	.120	.120	.120	.038	.038	.038	
1.0	.356	.324	.294	.305	.278	.253	.209	.191	.175	.120	.111	.102	.038	.036	.033	
2.0	.350	.301	.260	.300	.259	.225	.206	.179	.157	.119	.104	.092	.038	.034	.030	
3.0	.343	.285	.239	.294	.246	.207	.202	.171	.145	.117	.100	.086	.037	.032	.028	
4.0	.335	.273	.226	.287	.236	.196	.198	.164	.138	.114	.096	.082	.037	.031	.027	
5.0	.327	.263	.216	.281	.228	.188	.193	.159	.133	.112	.093	.079	.036	.030	.026	
6.0	.319	.255	.210	.275	.221	.183	.189	.155	.129	.110	.091	.077	.035	.030	.025	
7.0	.312	.249	.205	.269	.216	.178	.186	.151	.126	.108	.089	.075	.035	.029	.025	
8.0	.305	.243	.201	.263	.211	.175	.182	.148	.124	.106	.087	.074	.034	.029	.025	
9.0	.299	.239	.198	.257	.207	.173	.178	.146	.123	.104	.086	.073	.034	.028	.024	
10.0	.293	.235	.196	.252	.204	.171	.175	.143	.121	.102	.085	.072	.033	.028	.024	

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

## Uncorrected UGR Table

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm											
NAME:		TYPE:壁灯				WEIGHT:					
DIM.:		SPEC.:				SERIAL No.:2017-08-01-01					
MFR.: target		SUR.:600*100MM				PROTECTION ANGLE:					
ceiling/cavity		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H		14.0	15.4	14.6	16.0	16.6	17.7	19.1	18.3	19.7	20.3
	3H	15.3	16.6	15.9	17.2	17.9	21.0	22.3	21.6	22.9	23.5
	4H	15.8	17.0	16.4	17.6	18.4	22.8	24.0	23.4	24.6	25.3
	6H	16.1	17.2	16.7	17.8	18.6	24.8	25.9	25.4	26.5	27.3
	8H	16.1	17.2	16.7	17.8	18.6	25.8	26.9	26.5	27.6	28.3
	12H	16.1	17.1	16.7	17.8	18.6	27.0	28.1	27.7	28.8	29.5
	4H 2H	15.8	17.0	16.4	17.6	18.3	18.3	19.5	18.9	20.1	20.8
	3H	17.6	18.6	18.2	19.3	20.0	21.8	22.9	22.4	23.5	24.3
	4H	18.3	19.3	19.0	20.0	20.8	23.8	24.8	24.5	25.5	26.3
	6H	18.9	19.8	19.6	20.5	21.3	26.0	26.9	26.7	27.6	28.4
	8H	19.0	19.9	19.7	20.6	21.4	27.2	28.0	27.9	28.8	29.6
	12H	19.1	19.9	19.8	20.6	21.4	28.6	29.3	29.3	30.1	30.9
	8H 4H	20.2	21.0	20.9	21.7	22.6	24.2	25.0	24.9	25.7	26.5
	6H	21.3	22.1	22.1	22.8	23.7	26.7	27.4	27.4	28.1	29.0
	8H	21.8	22.4	22.6	23.2	24.1	28.1	28.8	28.9	29.5	30.4
	12H	22.1	22.7	22.9	23.5	24.4	29.8	30.3	30.5	31.1	32.0
	12H 4H	20.8	21.6	21.5	22.3	23.2	24.2	25.0	24.9	25.7	26.5
	6H	22.3	22.9	23.0	23.7	24.6	26.8	27.4	27.6	28.2	29.1
	8H	23.0	23.6	23.8	24.4	25.3	28.4	28.9	29.1	29.7	30.6
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H		+ 0.1 / - 0.1					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117 Corrected 1053 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.2)

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

## UTILIZATION FACTORS TABLE

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	44	32	24	43	31	24	41	30	24	17
0.80	53	40	31	52	39	31	49	37	30	22
1.00	61	47	38	59	46	38	55	46	36	27
1.25	68	54	45	65	53	44	61	50	42	32
1.50	73	60	50	70	58	49	65	55	47	36
2.00	80	68	59	77	66	57	71	62	54	42
2.50	85	74	65	81	71	63	75	66	59	46
3.00	89	79	70	85	76	68	78	70	64	49
4.00	94	85	78	90	82	75	82	75	70	54
5.00	97	89	83	93	86	80	85	79	74	58
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

ISOCANDELA DIAGRAM

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

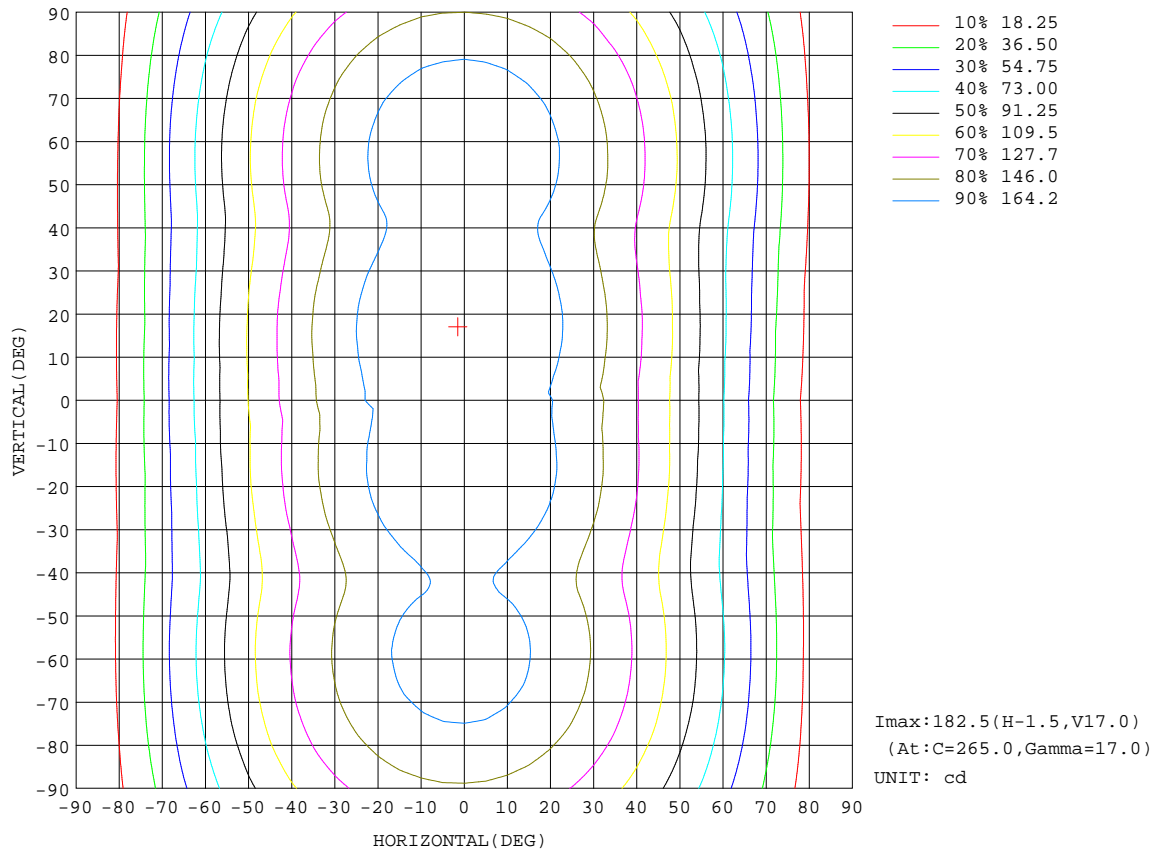


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

AAI Figure

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

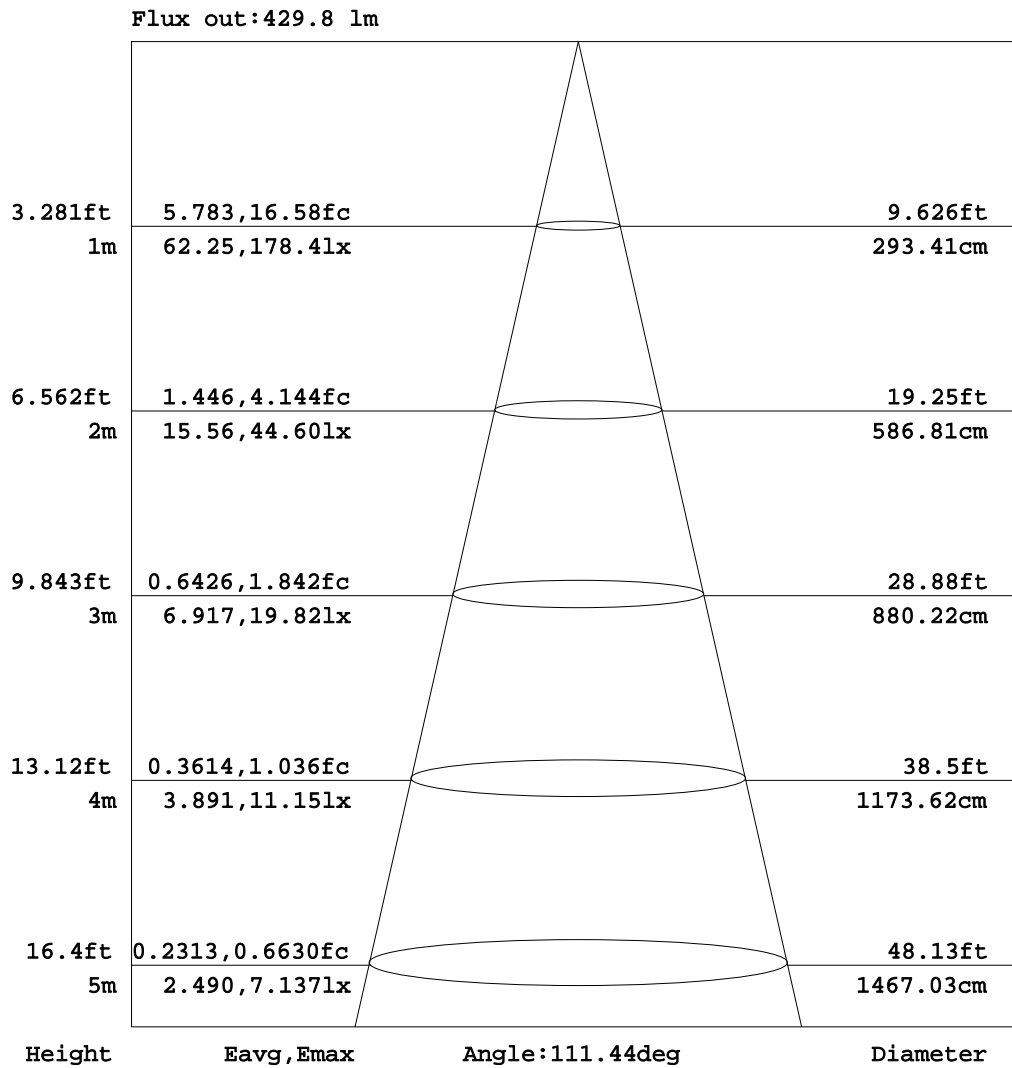

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯



ISOLUX DIAGRAM


Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

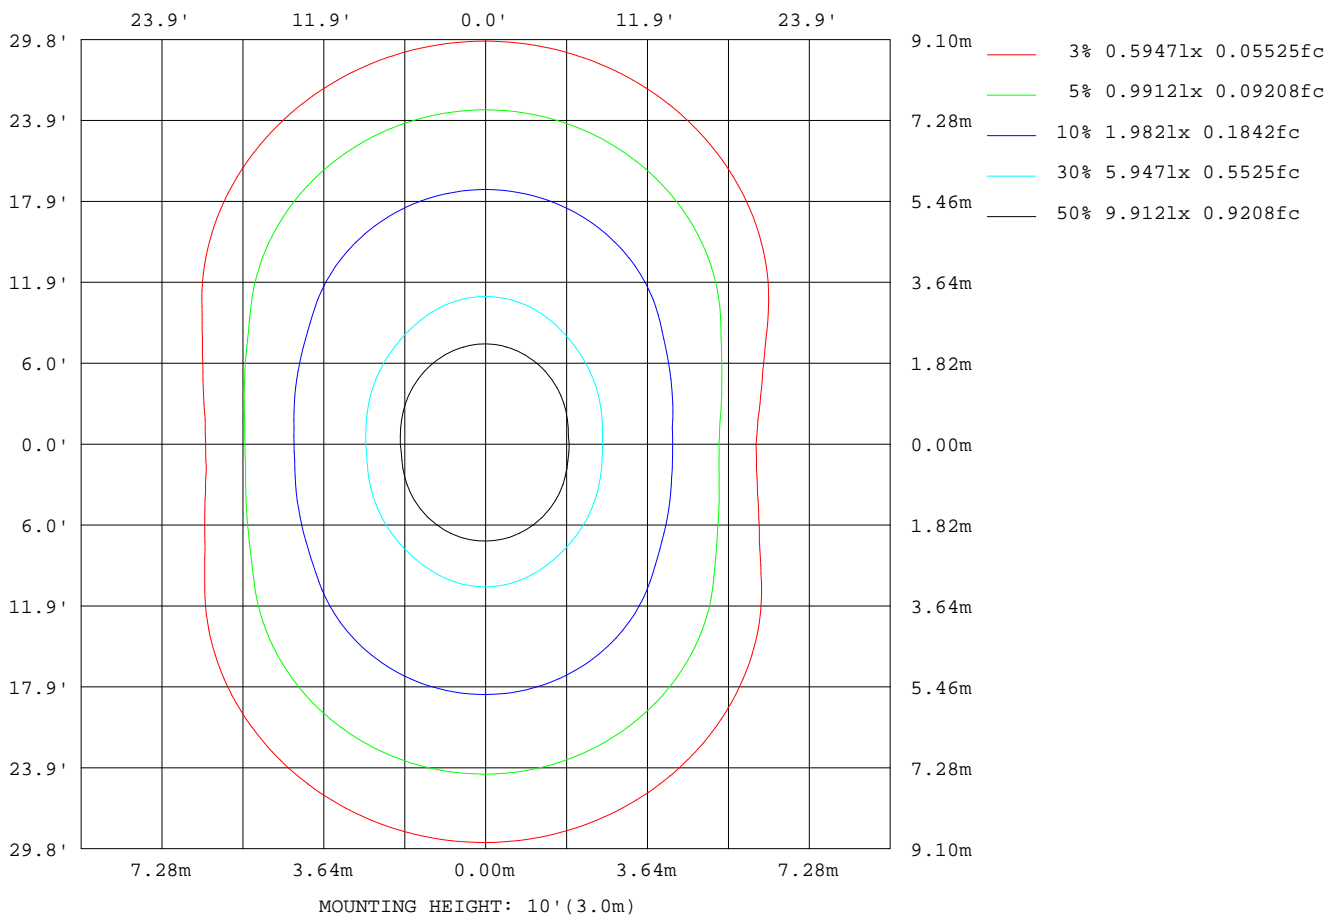

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

Planar Illuminance Curve

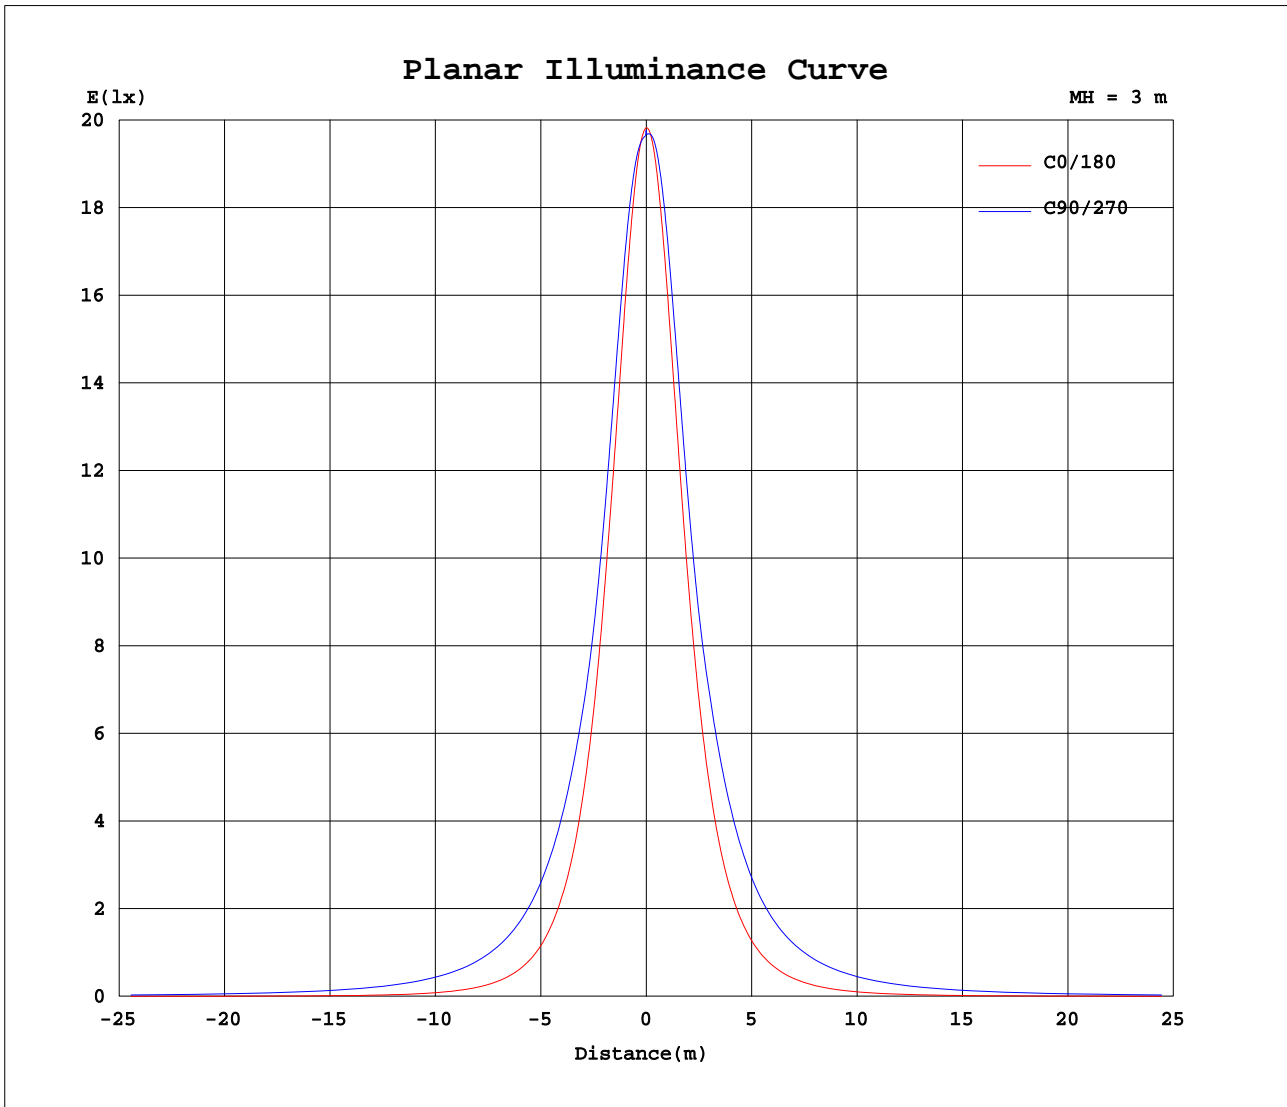

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25DEG  
Operators: luominxian  
Test Date: 2017-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
Humidity: 70%  
Test Distance: 8.250m [K=1.0000]  
Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	178	178	178	178	178	178	177	177	177	177	177	177	177	177	177	177	177	177	178
5	177	177	177	177	177	177	177	177	177	177	177	177	177	177	177	177	178	177	177
10	175	174	174	174	175	175	175	176	176	177	177	177	178	178	178	178	179	179	179
15	170	170	170	171	171	172	173	174	175	175	176	177	177	178	178	179	179	179	179
20	165	165	165	166	167	168	169	170	172	173	174	175	176	177	177	178	178	178	179
25	158	158	158	160	161	162	164	166	167	169	171	172	173	174	175	176	176	176	176
30	150	150	150	152	154	156	158	160	162	164	166	167	169	170	171	172	173	173	173
35	140	140	141	143	145	148	150	153	155	157	159	161	163	165	166	167	168	169	169
40	129	129	130	133	135	138	141	144	147	150	152	155	157	160	162	164	165	166	166
45	116	117	119	121	124	128	131	135	138	142	145	149	153	157	160	163	165	166	167
50	103	104	106	109	112	117	120	125	130	135	141	146	152	157	162	165	168	169	170
55	89.4	90.3	92.2	95.7	99.8	105	110	116	123	131	139	146	153	158	163	166	169	171	172
60	73.5	74.5	77.3	81.8	87.0	93.4	101	110	120	129	137	145	152	158	162	166	169	171	172
65	57.7	58.9	62.4	68.1	75.0	84.2	95.0	106	116	126	134	142	150	156	161	165	168	170	171
70	41.8	43.2	47.9	55.4	65.4	77.7	89.5	101	111	121	130	139	146	153	158	162	165	167	168
75	26.5	28.4	34.8	45.5	58.2	71.0	83.1	94.8	106	116	125	134	141	148	154	158	161	163	164
80	13.0	15.7	25.0	37.7	50.6	63.5	75.9	87.9	98.9	109	119	128	136	142	148	153	156	158	159
85	3.48	7.34	17.5	29.8	42.5	55.5	68.0	80.1	91.4	102	112	121	128	135	141	146	149	151	152
90	0.56	2.87	10.8	22.0	34.2	47.0	59.4	71.5	82.9	93.6	103	112	120	127	133	138	141	143	144
95	0.51	1.32	5.98	14.9	25.9	38.1	50.1	62.1	73.3	84.0	93.7	103	110	117	123	128	131	133	134
100	0.48	0.78	3.85	9.62	18.4	29.3	40.6	52.1	63.1	73.6	83.2	92.1	99.8	107	112	117	120	123	123
105	0.49	0.63	2.85	6.99	12.9	21.4	31.3	42.0	52.4	62.6	71.9	80.6	88.1	95.0	100	105	108	111	111
110	0.55	0.63	1.76	5.62	10.0	15.9	23.2	32.2	41.6	51.1	59.9	68.3	75.5	82.2	87.5	92.1	95.2	97.4	98.1
115	0.61	0.66	0.81	4.14	8.28	12.7	17.8	24.2	31.7	39.9	47.8	55.6	62.4	68.7	73.8	78.1	81.1	83.3	84.0
120	0.69	0.72	0.79	2.63	6.41	10.6	14.6	18.7	24.3	30.2	36.5	43.2	49.3	55.0	59.6	63.7	66.4	68.5	69.2
125	0.78	0.78	0.83	1.23	4.52	8.33	12.1	15.9	19.5	23.4	28.2	32.7	37.3	42.0	45.9	49.5	51.9	53.7	54.3
130	0.87	0.86	0.89	0.94	2.66	6.02	9.52	13.0	16.3	19.5	22.4	25.2	28.8	32.0	34.5	37.1	38.9	40.3	40.8
135	0.98	0.95	0.96	1.00	1.18	3.75	6.83	10.0	13.0	16.0	18.6	21.0	23.2	25.1	26.6	28.1	29.4	30.6	31.0
140	1.11	1.04	1.03	1.06	1.19	1.69	4.16	6.94	9.62	12.2	14.6	16.9	18.8	20.5	21.9	23.1	23.9	24.5	24.7
145	1.12	1.10	1.10	1.12	1.25	1.28	1.77	3.90	6.16	8.44	10.5	12.5	14.2	15.8	17.0	18.1	18.7	19.3	19.5
150	1.17	1.16	1.15	1.15	1.35	1.35	1.34	1.42	2.87	4.67	6.38	8.08	9.51	10.9	11.9	12.9	13.4	14.0	14.1
155	1.22	1.21	1.30	1.36	1.43	1.38	1.39	1.40	1.43	1.54	2.55	3.79	4.88	5.98	6.80	7.60	8.07	8.50	8.59
160	1.26	1.25	1.25	1.25	1.43	1.42	1.43	1.44	1.46	1.46	1.47	1.47	1.48	1.73	2.19	2.69	3.01	3.32	3.37
165	1.51	1.51	1.50	1.51	1.61	1.66	1.66	1.67	1.73	1.71	1.57	1.51	1.51	1.51	1.51	1.50	1.51	1.51	1.30
170	1.55	1.55	1.54	1.54	1.52	1.52	1.52	1.52	1.56	1.55	1.55	1.56	1.55	1.58	1.60	1.59	1.56	1.36	1.32
175	1.57	1.57	1.56	1.56	1.54	1.54	1.54	1.53	1.57	1.57	1.58	1.61	1.61	1.62	1.63	1.62	1.60	1.28	1.29
180	1.58	1.58	1.57	1.57	1.55	1.55	1.55	1.55	1.58	1.58	1.58	1.58	1.55	1.55	1.55	1.55	1.29	1.28	1.29

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

Table--2

UNIT: cd

C(DEG)\γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	177	177	177	177	177	176	176	176	176	176	176	176	176	176	176	176	176	178	178
5	177	177	177	177	177	177	177	176	176	176	176	176	176	176	176	176	176	178	178
10	178	178	178	178	178	177	177	177	176	176	175	175	175	174	174	174	174	176	176
15	179	179	179	178	178	177	177	176	176	175	174	173	172	172	171	171	170	173	173
20	179	178	178	178	177	176	175	175	173	172	171	170	169	168	167	166	166	168	168
25	177	176	176	175	175	174	173	172	170	169	167	166	164	163	161	160	159	161	162
30	173	173	172	172	171	170	168	167	166	164	162	160	158	156	154	153	152	154	154
35	169	169	168	167	166	165	163	161	159	157	155	153	151	148	146	144	143	145	145
40	166	165	164	163	161	159	157	155	152	150	147	144	142	139	137	134	133	134	135
45	166	165	163	161	158	155	151	148	145	141	138	135	132	129	126	123	121	123	123
50	169	168	166	163	159	154	148	143	138	133	129	125	121	117	114	111	109	110	111
55	171	170	167	164	160	154	148	141	134	126	120	114	110	105	102	98.1	95.8	96.0	96.9
60	172	170	167	164	159	154	147	140	132	123	114	105	98.5	92.8	88.2	84.0	81.5	81.1	82.2
65	170	169	166	162	158	152	145	137	129	120	110	99.1	88.9	80.8	74.6	69.4	66.0	65.6	66.8
70	168	166	163	160	155	149	142	134	125	115	105	93.9	82.4	70.9	61.8	55.1	50.6	49.7	51.3
75	164	162	160	155	150	144	137	129	120	110	99.3	87.9	76.1	63.7	51.5	41.7	35.8	34.0	36.0
80	159	157	154	150	145	138	131	123	114	103	92.7	81.1	69.1	56.4	43.8	31.2	22.4	19.5	22.0
85	152	150	147	143	138	132	124	116	106	96.2	85.3	73.5	61.3	48.6	35.9	23.4	12.4	7.56	11.0
90	144	142	139	135	130	123	116	108	98.4	88.1	77.1	65.3	53.1	40.4	28.0	16.1	6.41	1.03	4.57
95	134	132	130	125	120	114	107	98.3	89.1	78.8	67.9	56.2	44.3	31.9	20.3	9.87	2.69	0.40	1.40
100	123	122	119	115	110	104	96.3	87.9	78.8	68.7	58.1	46.6	35.2	23.8	13.6	5.75	1.61	0.40	0.80
105	111	110	107	103	98.2	91.9	84.9	76.7	67.8	58.0	47.8	37.0	26.5	16.8	9.23	4.24	0.97	0.42	0.46
110	98.0	96.5	94.0	90.2	85.4	79.4	72.7	64.7	56.3	47.0	37.5	27.9	19.1	12.3	7.19	3.19	0.60	0.46	0.47
115	84.0	82.4	80.1	76.4	72.0	66.1	59.8	52.4	44.6	36.0	27.8	20.2	14.2	9.70	5.66	2.03	0.65	0.51	0.53
120	69.1	67.7	65.6	62.1	57.8	52.5	46.9	40.2	33.3	26.7	21.0	15.6	11.9	7.97	4.19	1.00	0.70	0.59	0.60
125	54.3	53.0	51.1	47.9	44.4	40.0	35.1	29.6	25.2	19.9	16.4	13.0	9.59	5.90	2.58	0.83	0.78	0.68	0.69
130	40.8	39.7	38.3	35.7	33.3	30.2	26.5	22.6	19.6	16.2	13.1	10.1	6.83	3.77	1.24	0.90	0.87	0.76	0.78
135	31.0	30.1	28.7	27.2	25.6	23.4	21.0	18.3	15.2	12.4	9.86	7.03	4.45	2.04	1.02	0.97	0.96	0.84	0.85
140	24.7	24.2	23.4	22.4	20.8	18.5	16.2	13.6	11.2	8.96	6.69	4.47	2.46	1.11	1.09	1.06	1.05	0.90	0.90
145	19.5	18.9	18.4	17.2	15.8	13.4	11.5	9.42	7.56	5.73	4.04	2.36	1.20	1.15	1.13	1.13	1.11	0.96	0.96
150	14.1	13.4	13.0	12.0	10.5	8.77	7.32	5.80	4.43	3.04	1.85	1.23	1.22	1.21	1.20	1.21	1.18	1.03	1.03
155	8.52	8.13	7.74	6.70	5.60	4.47	3.54	2.59	1.79	1.28	1.25	1.25	1.25	1.31	1.41	1.30	1.22	1.10	1.09
160	3.24	3.00	2.71	2.16	1.76	1.39	1.30	1.29	1.29	1.30	1.30	1.30	1.29	1.28	1.28	1.28	1.26	1.17	1.15
165	1.31	1.31	1.31	1.32	1.32	1.32	1.32	1.32	1.32	1.33	1.33	1.38	1.61	1.77	1.71	1.58	1.56	1.48	1.47
170	1.43	1.52	1.54	1.52	1.45	1.37	1.33	1.35	1.59	1.59	1.59	1.60	1.59	1.59	1.58	1.58	1.58	1.51	1.50
175	1.30	1.30	1.30	1.30	1.31	1.57	1.57	1.58	1.58	1.58	1.58	1.58	1.59	1.58	1.58	1.58	1.58	1.55	1.55
180	1.28	1.27	1.33	1.55	1.55	1.55	1.55	1.55	1.55	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.56	1.59	1.58

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

Table--3

UNIT: cd

C( DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	178	178	178	178	177	177	177	177	177	177	177	177	177	177	177	177	178	177	177
5	178	178	178	178	178	178	178	178	178	179	179	179	179	179	179	179	179	179	179
10	176	176	177	177	177	178	178	179	179	180	180	180	181	181	181	181	181	181	180
15	173	174	174	175	176	177	178	178	179	180	181	181	182	182	182	182	182	182	182
20	169	169	171	172	173	174	176	177	178	179	180	181	181	182	182	182	182	182	182
25	163	164	166	167	169	171	172	174	175	177	178	179	180	180	181	181	181	181	180
30	155	157	159	161	163	165	167	169	171	173	174	176	177	178	178	179	178	178	178
35	147	149	151	154	156	159	161	163	166	168	170	171	173	174	175	175	175	175	174
40	137	139	142	145	148	151	154	157	160	162	165	167	170	171	173	173	174	173	172
45	126	128	132	135	139	142	146	149	153	157	161	165	169	172	174	175	176	175	174
50	113	117	120	124	128	133	138	143	149	155	161	166	171	174	176	178	178	178	176
55	100	104	108	113	118	124	131	139	148	155	161	167	171	175	177	179	180	179	177
60	85.8	90.1	95.5	101	109	118	128	137	145	153	160	165	170	174	177	178	179	178	177
65	71.1	76.3	83.1	91.6	102	113	124	133	142	150	157	163	168	172	175	177	177	176	175
70	56.3	63.0	72.6	84.4	96.3	108	118	128	137	146	153	159	164	169	172	173	174	173	171
75	42.4	51.8	64.6	77.0	89.4	101	112	122	132	140	148	154	160	164	167	168	169	168	166
80	30.6	43.1	56.2	69.0	81.6	93.4	105	115	125	133	141	148	153	157	161	162	163	162	160
85	21.8	34.3	47.5	60.3	73.1	85.0	96.5	107	117	125	133	140	145	150	153	155	155	154	153
90	14.0	25.6	38.3	51.1	63.8	75.8	87.4	97.8	108	116	124	131	136	141	144	145	146	145	143
95	7.53	17.4	29.2	41.3	53.8	65.6	77.1	87.5	97.3	106	114	120	126	130	133	135	136	135	133
100	4.01	10.7	20.5	31.6	43.4	54.8	66.0	76.2	85.9	94.4	102	109	114	118	121	123	124	123	121
105	2.95	6.94	13.6	22.7	33.2	43.8	54.5	64.3	73.7	82.0	89.6	95.9	101	105	109	110	111	110	108
110	1.96	5.61	9.85	15.7	23.9	33.1	42.8	52.0	61.0	68.9	76.2	82.3	87.7	91.5	94.6	96.2	96.9	96.0	94.4
115	0.97	4.19	8.12	12.2	17.0	23.6	31.6	39.9	48.1	55.4	62.3	68.0	73.1	76.8	79.8	81.2	82.0	81.1	79.5
120	0.66	2.83	6.44	10.3	14.0	17.8	22.9	28.6	35.6	42.3	48.4	53.5	58.2	61.5	64.3	65.7	66.3	65.5	64.1
125	0.73	1.44	4.53	8.03	11.6	14.8	18.1	21.7	25.7	30.6	35.9	40.0	43.9	46.8	49.2	50.3	50.9	50.2	49.0
130	0.79	0.82	2.57	5.42	8.65	11.7	14.7	17.8	20.8	23.3	26.6	29.7	32.3	34.3	36.0	36.9	37.3	36.8	35.9
135	0.87	0.89	1.14	3.23	5.81	8.51	11.3	13.8	16.7	19.3	21.6	24.0	25.8	26.8	27.8	28.2	28.5	28.2	27.8
140	0.91	0.91	0.91	1.45	3.34	5.45	7.70	9.92	12.2	14.6	17.1	18.9	21.2	22.1	23.0	23.3	23.5	23.3	23.0
145	0.96	0.96	0.95	0.95	1.47	2.98	4.69	6.36	8.19	10.0	12.1	14.1	16.1	17.1	17.8	18.3	18.5	18.3	18.0
150	1.11	1.04	1.01	1.00	1.01	1.14	2.19	3.43	4.80	6.13	7.61	9.12	10.9	12.0	12.6	13.1	13.3	13.1	12.8
155	1.09	1.21	1.13	1.05	1.05	1.09	1.09	1.19	1.89	2.70	3.60	4.53	5.73	6.87	7.42	7.80	7.96	7.79	7.56
160	1.15	1.14	1.12	1.12	1.12	1.16	1.16	1.16	1.16	1.17	1.12	1.24	1.63	2.04	2.51	2.63	2.96	2.83	2.69
165	1.47	1.45	1.50	1.63	1.64	1.39	1.23	1.22	1.23	1.23	1.19	1.17	1.16	1.16	1.15	1.13	1.12	1.38	1.37
170	1.50	1.48	1.48	1.47	1.47	1.51	1.52	1.52	1.51	1.25	1.23	1.22	1.27	1.33	1.32	1.29	1.23	1.17	1.65
175	1.55	1.54	1.53	1.52	1.52	1.55	1.55	1.55	1.55	1.55	1.61	1.38	1.27	1.28	1.28	1.27	1.25	1.23	1.23
180	1.58	1.56	1.55	1.55	1.55	1.57	1.57	1.58	1.58	1.58	1.75	1.55	1.55	1.56	1.28	1.28	1.30	1.28	1.27

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.8V I:0.2676A P:31.98W PF:0.9894 Lamp Flux:1052.55x1 lm		
NAME:	TYPE:壁灯	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2017-08-01-01
MFR.: target	SUR.:600*100MM	PROTECTION ANGLE:

Table--4

UNIT: cd

C( DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	177	177	177	176	176	176	176	176	176	176	176	176	176	176	176				
5	178	178	178	178	178	177	177	177	177	176	176	176	176	176	175				
10	180	180	180	179	178	178	177	177	176	175	175	174	174	173	173				
15	181	181	180	179	179	178	177	176	175	174	173	172	171	170	169				
20	181	180	180	178	177	176	175	173	172	170	169	167	166	165	164				
25	179	179	177	176	175	173	171	170	168	166	164	162	160	158	157				
30	177	176	174	173	171	169	167	165	162	160	157	155	153	151	149				
35	173	172	170	168	166	163	161	158	155	153	150	147	144	142	140				
40	171	169	166	163	160	157	154	151	147	144	141	137	134	131	129				
45	171	168	164	160	156	151	147	143	138	134	130	127	123	120	117				
50	174	170	166	161	155	148	141	135	129	124	120	115	111	107	104				
55	174	171	166	161	154	147	139	130	122	115	108	103	98.1	93.9	90.1				
60	174	170	165	159	152	145	136	127	117	107	98.1	91.0	84.7	79.7	75.3				
65	172	168	163	156	149	141	133	123	113	102	90.3	79.9	71.5	65.2	60.1				
70	168	164	159	152	145	137	127	118	107	95.7	83.8	71.5	59.7	51.3	44.9				
75	163	159	153	147	139	131	121	111	100	88.8	76.4	63.8	50.7	38.8	30.5				
80	157	153	147	140	133	124	114	104	92.6	80.8	68.2	55.4	42.2	29.4	18.2				
85	149	145	139	132	124	116	106	95.6	84.1	72.2	59.5	46.7	33.5	21.1	9.87				
90	140	136	130	123	115	107	96.8	86.4	74.8	62.9	50.2	37.5	24.8	13.4	4.20				
95	130	125	120	113	105	96.4	86.4	76.1	64.6	52.8	40.4	28.4	16.8	7.37	1.85				
100	118	114	108	101	93.5	85.0	75.3	65.0	53.8	42.4	30.7	19.9	10.5	4.62	1.20				
105	105	101	95.3	89.0	81.2	72.8	63.3	53.4	42.7	32.3	22.0	13.5	7.70	3.56	0.57				
110	91.2	87.2	81.7	75.5	68.0	60.0	51.0	41.8	32.2	23.4	15.8	10.7	6.29	2.42	0.54				
115	76.4	72.6	67.4	61.6	54.6	47.2	39.1	31.2	23.6	17.7	13.1	8.90	4.79	1.28	0.57				
120	61.2	57.7	52.9	47.8	41.6	35.4	28.9	23.4	18.8	15.0	11.0	7.03	3.23	0.70	0.63				
125	46.4	43.5	39.6	35.4	30.8	26.7	22.7	19.6	16.1	12.5	8.77	5.11	1.70	0.76	0.72				
130	34.2	32.2	29.7	27.2	24.7	22.2	19.4	16.5	13.2	9.92	6.46	3.19	0.87	0.82	0.80				
135	27.0	26.0	24.6	23.0	20.9	18.7	16.1	13.4	10.4	7.33	4.22	1.52	0.98	0.92	0.88				
140	22.2	21.3	19.9	18.4	16.5	14.5	12.2	9.74	7.07	4.43	1.89	1.06	0.93	0.92	0.90				
145	17.3	16.4	15.2	13.9	12.2	10.4	8.34	6.22	3.96	1.90	1.12	1.11	0.97	0.96	0.95				
150	12.2	11.4	10.4	9.25	7.80	6.29	4.57	2.90	1.37	1.19	1.18	1.18	1.03	1.02	1.02				
155	7.03	6.45	5.58	4.69	3.54	2.46	1.42	1.26	1.26	1.25	1.25	1.33	1.16	1.09	1.08				
160	2.32	1.97	1.51	1.33	1.32	1.32	1.33	1.34	1.36	1.38	1.36	1.36	1.16	1.14	1.15				
165	1.37	1.38	1.38	1.40	1.39	1.42	1.60	1.65	1.67	1.58	1.43	1.41	1.40	1.40	1.40				
170	1.66	1.67	1.69	1.60	1.47	1.45	1.46	1.46	1.46	1.46	1.45	1.45	1.45	1.45	1.45				
175	1.51	1.56	1.51	1.51	1.51	1.52	1.52	1.52	1.52	1.53	1.53	1.53	1.53	1.53	1.53				
180	1.33	1.54	1.55	1.55	1.55	1.55	1.56	1.55	1.56	1.56	1.56	1.57	1.56	1.57	1.56				

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.250m [K=1.0000]  
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
0.0	178.4	178.1	178.0	177.7	177.6	177.5	177.5	177.4	177.4	177.4
2.5	178.0	177.7	177.5	177.3	177.2	177.1	177.2	177.1	177.1	177.2
5.0	177.3	177.0	176.8	176.7	176.6	176.6	176.7	176.8	176.9	177.1
7.5	176.1	175.9	175.7	175.7	175.7	175.9	176.0	176.3	176.6	177.0
10.0	174.6	174.4	174.3	174.4	174.5	174.9	175.2	175.7	176.1	176.6
12.5	172.7	172.5	172.5	172.8	173.1	173.6	174.1	174.8	175.4	176.1
15.0	170.5	170.3	170.3	170.8	171.3	172.0	172.8	173.7	174.6	175.4
17.5	167.9	167.7	167.8	168.4	169.1	170.1	171.1	172.2	173.3	174.3
20.0	164.9	164.8	165.0	165.8	166.7	167.9	169.1	170.5	171.7	173.0
22.5	161.5	161.5	161.8	162.8	163.9	165.3	166.8	168.4	169.8	171.2
25.0	157.9	157.9	158.3	159.5	160.8	162.5	164.1	166.0	167.5	169.1
27.5	153.9	154.0	154.5	155.9	157.4	159.3	161.2	163.2	164.9	166.7
30.0	150.1	150.0	150.4	152.0	153.6	155.8	157.8	160.0	161.9	163.8
32.5	145.7	145.6	145.9	147.6	149.6	151.9	154.1	156.5	158.6	160.8
35.0	140.0	140.2	140.9	143.0	145.2	147.7	150.1	152.7	155.0	157.3
37.5	134.4	134.6	135.8	138.0	140.5	143.2	145.8	148.6	151.0	153.6
40.0	128.6	128.9	130.3	132.8	135.4	138.4	141.1	144.2	146.9	149.8
42.5	122.6	123.0	124.6	127.2	130.1	133.2	136.2	139.5	142.6	145.7
45.0	116.4	116.9	118.5	121.4	124.4	127.9	131.1	134.7	138.1	141.8
47.5	109.8	110.4	112.2	115.3	118.5	122.2	125.9	129.8	133.7	138.1
50.0	103.1	103.7	105.7	109.0	112.5	116.5	120.5	125.0	129.7	134.9
52.5	96.38	97.09	99.19	102.5	106.2	110.6	115.1	120.3	126.0	132.6
55.0	89.44	90.26	92.24	95.72	99.78	104.7	109.9	116.1	123.2	131.2
57.5	81.54	82.42	84.81	88.85	93.33	98.91	105.1	112.7	121.4	130.2
60.0	73.53	74.54	77.35	81.85	86.98	93.41	100.9	110.1	119.8	129.0
62.5	65.63	66.71	69.89	74.91	80.78	88.39	97.60	108.1	118.0	127.4
65.0	57.68	58.89	62.42	68.11	74.96	84.17	95.01	105.9	116.1	125.7
67.5	49.70	51.03	55.06	61.48	69.80	80.79	92.33	103.4	113.9	123.6
70.0	41.78	43.23	47.90	55.43	65.42	77.71	89.45	100.8	111.3	121.3
72.5	33.98	35.70	41.06	50.01	61.86	74.40	86.36	97.90	108.6	118.8
75.0	26.48	28.43	34.81	45.51	58.25	70.98	83.06	94.78	105.7	115.9
77.5	19.42	21.70	29.37	41.62	54.49	67.36	79.58	91.43	102.4	112.8
80.0	13.01	15.72	24.95	37.69	50.59	63.53	75.88	87.85	98.94	109.5
82.5	7.597	10.84	21.17	33.77	46.64	59.63	72.03	84.12	95.25	105.9
85.0	3.477	7.339	17.48	29.76	42.53	55.53	67.98	80.15	91.37	102.1
87.5	1.106	4.766	14.00	25.86	38.43	51.36	63.81	76.00	87.30	98.01
90.0	0.5646	2.867	10.82	21.97	34.21	46.99	59.39	71.55	82.88	93.64
92.5	0.5254	1.817	8.099	18.31	30.03	42.54	54.78	66.96	78.23	88.95
95.0	0.5079	1.323	5.984	14.90	25.93	38.09	50.13	62.13	73.33	84.05
97.5	0.4905	1.059	4.722	11.94	22.04	33.63	45.34	57.20	68.27	78.95
100.0	0.4818	0.7842	3.851	9.620	18.43	29.26	40.58	52.13	63.09	73.63
102.5	0.4818	0.6597	3.358	8.113	15.30	25.13	35.86	47.05	57.76	68.16
105.0	0.4948	0.6337	2.848	6.993	12.95	21.36	31.28	41.96	52.36	62.56
107.5	0.5208	0.6294	2.307	6.324	11.14	18.16	26.99	36.98	46.93	56.85
110.0	0.5469	0.6294	1.764	5.623	10.04	15.92	23.17	32.22	41.58	51.11
112.5	0.5773	0.6425	1.247	4.894	9.177	13.74	20.08	27.86	36.43	45.38
115.0	0.6120	0.6557	0.8135	4.142	8.284	12.69	17.82	24.15	31.65	39.89
117.5	0.6509	0.6816	0.7812	3.386	7.358	11.63	15.85	21.57	27.48	34.74
120.0	0.6899	0.7163	0.7943	2.626	6.412	10.56	14.65	18.73	24.33	30.17
122.5	0.7333	0.7468	0.8031	1.882	5.484	9.460	13.40	17.33	21.26	26.63
125.0	0.7767	0.7816	0.8290	1.225	4.524	8.326	12.13	15.92	19.48	23.35
127.5	0.8159	0.8248	0.8633	0.9247	3.582	7.185	10.84	14.50	17.93	21.22
130.0	0.8720	0.8639	0.8941	0.9421	2.661	6.024	9.524	13.03	16.33	19.49
132.5	0.9202	0.9029	0.9200	0.9723	1.807	4.882	8.190	11.53	14.70	17.75
135.0	0.9766	0.9507	0.9634	1.003	1.181	3.754	6.827	10.02	13.02	15.95
137.5	1.076	1.071	0.9979	1.037	1.167	2.662	5.495	8.482	11.33	14.12
140.0	1.111	1.038	1.033	1.059	1.189	1.688	4.158	6.936	9.618	12.24
142.5	1.107	1.081	1.077	1.094	1.224	1.250	2.883	5.402	7.888	10.35
145.0	1.124	1.098	1.102	1.116	1.250	1.276	1.768	3.896	6.156	8.441
147.5	1.154	1.137	1.246	1.137	1.289	1.302	1.324	2.503	4.471	6.539
150.0	1.172	1.163	1.150	1.155	1.345	1.350	1.341	1.424	2.870	4.675
152.5	1.189	1.185	1.176	1.172	1.437	1.367	1.359	1.367	1.569	2.930
155.0	1.220	1.207	1.302	1.363	1.432	1.385	1.393	1.398	1.428	1.542
157.5	1.246	1.242	1.224	1.224	1.424	1.402	1.415	1.415	1.441	1.441
160.0	1.263	1.255	1.246	1.254	1.432	1.424	1.432	1.437	1.463	1.463
162.5	1.294	1.295	1.436	1.485	1.582	1.633	1.545	1.455	1.493	1.490
165.0	1.511	1.511	1.498	1.510	1.606	1.657	1.658	1.672	1.728	1.710
167.5	1.532	1.532	1.519	1.519	1.497	1.506	1.580	1.648	1.685	1.605
170.0	1.550	1.550	1.541	1.541	1.519	1.519	1.519	1.519	1.558	1.554
172.5	1.558	1.558	1.550	1.550	1.528	1.528	1.532	1.528	1.567	1.584
175.0	1.571	1.567	1.563	1.558	1.537	1.537	1.537	1.532	1.571	1.571
177.5	1.576	1.576	1.563	1.563	1.537	1.537	1.541	1.541	1.567	1.571
180.0	1.580	1.584	1.567	1.567	1.545	1.545	1.545	1.545	1.576	1.580

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
0.0	177.3	177.3	177.2	177.1	177.2	177.2	177.1	177.0	177.9	176.8
2.5	177.2	177.1	177.1	177.1	177.1	177.1	177.1	177.0	176.9	176.8
5.0	177.2	177.2	177.3	177.3	177.4	177.5	177.5	177.5	177.3	177.3
7.5	177.1	177.5	177.6	177.7	177.9	178.0	178.0	178.1	178.0	177.9
10.0	177.1	177.5	177.8	178.0	178.3	178.5	178.6	178.7	178.6	178.5
12.5	176.7	177.3	177.8	178.1	178.5	178.8	179.0	179.1	179.1	178.9
15.0	176.2	176.8	177.5	178.0	178.4	178.8	179.1	179.2	179.3	179.1
17.5	175.2	176.1	176.9	177.6	178.1	178.5	178.9	179.0	179.1	179.0
20.0	174.0	175.1	176.0	176.7	177.4	177.9	178.3	178.5	178.6	178.5
22.5	172.5	173.7	174.7	175.6	176.3	176.9	177.4	177.6	177.8	177.7
25.0	170.5	171.9	173.0	174.0	174.8	175.5	176.0	176.4	176.5	176.5
27.5	168.3	169.7	171.0	172.1	173.0	173.8	174.4	174.8	175.0	175.0
30.0	165.6	167.2	168.6	169.9	170.9	171.9	172.5	173.0	173.2	173.2
32.5	162.6	164.4	166.0	167.5	168.6	169.7	170.4	171.0	171.2	171.3
35.0	159.3	161.5	163.2	164.8	166.2	167.5	168.3	169.0	169.2	169.3
37.5	155.9	158.3	160.3	162.2	163.9	165.4	166.3	167.1	167.4	167.4
40.0	152.3	155.1	157.4	159.7	161.8	163.6	164.9	165.8	166.1	166.0
42.5	148.7	151.9	154.9	157.7	160.3	162.5	164.3	165.3	165.8	165.5
45.0	145.4	149.2	153.0	156.5	159.9	162.6	164.9	166.1	166.8	166.3
47.5	142.5	147.3	152.0	156.6	160.7	163.9	166.4	167.8	168.5	168.0
50.0	140.5	146.4	152.2	157.4	161.7	165.1	167.7	169.1	169.9	169.4
52.5	139.5	146.4	152.6	158.0	162.4	166.0	168.7	170.2	170.9	170.4
55.0	139.1	146.2	152.6	158.2	162.8	166.5	169.3	170.9	171.6	171.2
57.5	138.3	145.7	152.3	158.1	162.8	166.7	169.4	171.2	172.0	171.5
60.0	137.3	145.0	151.7	157.6	162.5	166.4	169.4	171.2	171.9	171.5
62.5	136.0	143.9	150.8	156.8	161.8	165.9	168.9	170.8	171.5	171.1
65.0	134.4	142.5	149.5	155.7	160.9	165.1	168.1	170.0	170.8	170.4
67.5	132.5	140.7	147.9	154.3	159.6	163.8	166.9	168.9	169.6	169.3
70.0	130.4	138.8	146.1	152.6	157.9	162.3	165.4	167.4	168.1	167.8
72.5	128.0	136.5	143.9	150.5	156.0	160.3	163.5	165.6	166.4	166.0
75.0	125.3	133.9	141.5	148.1	153.7	158.1	161.4	163.5	164.2	163.8
77.5	122.3	131.0	138.6	145.5	151.0	155.5	158.8	161.0	161.7	161.4
80.0	119.1	127.9	135.6	142.4	148.0	152.6	155.9	158.1	158.9	158.6
82.5	115.5	124.4	132.1	139.1	144.7	149.4	152.7	154.9	155.7	155.5
85.0	111.7	120.7	128.4	135.4	141.0	145.8	149.1	151.3	152.1	151.9
87.5	107.7	116.7	124.6	131.5	137.1	141.8	145.1	147.5	148.2	148.0
90.0	103.3	112.4	120.2	127.1	132.8	137.5	140.8	143.1	143.8	143.6
92.5	98.63	107.7	115.5	122.5	128.1	132.8	136.0	138.4	139.2	139.0
95.0	93.71	102.7	110.5	117.5	123.1	127.9	131.2	133.5	134.3	134.0
97.5	88.55	97.60	105.3	112.2	117.8	122.7	125.9	128.2	129.0	128.8
100.0	83.17	92.11	99.79	106.7	112.3	117.1	120.3	122.6	123.4	123.3
102.5	77.59	86.43	94.04	101.0	106.5	111.2	114.4	116.7	117.5	117.4
105.0	71.86	80.58	88.10	95.00	100.4	105.1	108.3	110.5	111.3	111.2
107.5	65.93	74.55	81.91	88.73	94.10	98.70	101.8	104.1	104.9	104.7
110.0	59.92	68.30	75.53	82.23	87.53	92.07	95.17	97.42	98.14	98.04
112.5	53.81	61.95	69.00	75.54	80.74	85.20	88.22	90.46	91.19	91.09
115.0	47.81	55.61	62.42	68.74	73.78	78.13	81.13	83.30	84.04	83.96
117.5	41.99	49.31	55.79	61.85	66.72	70.96	73.84	75.95	76.67	76.60
120.0	36.54	43.24	49.26	55.01	59.60	63.69	66.45	68.51	69.18	69.15
122.5	31.78	37.59	43.02	48.32	52.61	56.45	59.08	61.05	61.66	61.66
125.0	28.17	32.67	37.34	42.03	45.92	49.46	51.86	53.73	54.30	54.28
127.5	24.53	29.14	32.55	36.42	39.76	42.86	45.04	46.72	47.21	47.22
130.0	22.37	25.18	28.83	31.99	34.54	37.08	38.88	40.33	40.75	40.75
132.5	20.48	23.09	25.31	27.80	30.51	32.75	33.94	35.04	35.36	35.34
135.0	18.56	21.05	23.16	25.10	26.64	28.13	29.44	30.63	31.01	30.98
137.5	16.60	18.99	20.99	22.84	24.30	25.56	26.39	27.05	27.33	27.21
140.0	14.60	16.86	18.76	20.52	21.90	23.11	23.90	24.52	24.72	24.69
142.5	12.57	14.70	16.48	18.18	19.48	20.62	21.36	21.95	22.11	22.11
145.0	10.51	12.51	14.18	15.76	16.97	18.06	18.74	19.32	19.46	19.46
147.5	8.445	10.29	11.84	13.32	14.45	15.47	16.11	16.65	16.78	16.80
150.0	6.385	8.083	9.510	10.86	11.91	12.85	13.45	13.96	14.09	14.11
152.5	4.385	5.882	7.165	8.409	9.348	10.22	10.76	11.23	11.32	11.31
155.0	2.550	3.786	4.878	5.984	6.799	7.598	8.073	8.499	8.590	8.521
157.5	1.455	1.949	2.772	3.662	4.360	5.038	5.452	5.846	5.914	5.851
160.0	1.467	1.472	1.476	1.733	2.185	2.694	3.010	3.321	3.368	3.243
162.5	1.480	1.480	1.493	1.493	1.489	1.480	1.499	1.523	1.360	1.345
165.0	1.571	1.506	1.511	1.506	1.506	1.502	1.515	1.506	1.298	1.311
167.5	1.537	1.532	1.528	1.528	1.523	1.515	1.528	1.511	1.298	1.307
170.0	1.554	1.559	1.549	1.581	1.601	1.594	1.558	1.358	1.315	1.429
172.5	1.628	1.706	1.745	1.749	1.745	1.758	1.745	1.289	1.346	1.441
175.0	1.580	1.606	1.611	1.618	1.629	1.618	1.598	1.281	1.289	1.298
177.5	1.576	1.576	1.554	1.550	1.550	1.558	1.281	1.285	1.294	1.298
180.0	1.580	1.584	1.554	1.545	1.550	1.554	1.289	1.281	1.294	1.281

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks: 壁灯



## Photometric Data Table [cd]

G/C	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
0.0	176.6	176.6	176.6	176.5	176.4	176.4	176.3	176.3	176.3	176.3
2.5	176.7	176.5	176.6	176.4	176.4	176.4	176.3	176.1	176.2	176.1
5.0	177.3	177.0	176.9	176.9	176.7	176.6	176.4	176.2	176.2	176.0
7.5	177.9	177.7	177.5	177.3	177.1	176.8	176.5	176.3	176.1	175.8
10.0	178.4	178.3	178.1	177.7	177.4	177.1	176.7	176.2	175.8	175.4
12.5	178.8	178.6	178.4	177.9	177.5	177.1	176.6	176.0	175.3	174.8
15.0	179.0	178.8	178.4	178.0	177.5	176.8	176.2	175.5	174.8	173.9
17.5	178.9	178.6	178.2	177.7	177.0	176.4	175.5	174.7	173.7	172.7
20.0	178.4	178.0	177.6	177.0	176.3	175.4	174.5	173.5	172.4	171.4
22.5	177.4	177.1	176.6	176.0	175.2	174.2	173.1	172.1	170.8	169.4
25.0	176.2	176.0	175.3	174.6	173.7	172.7	171.6	170.2	168.7	167.4
27.5	174.7	174.3	173.7	172.8	171.8	170.8	169.4	168.1	166.4	164.8
30.0	172.9	172.4	171.6	170.8	169.7	168.5	167.1	165.6	163.7	161.9
32.5	170.8	170.4	169.5	168.6	167.3	165.9	164.3	162.6	160.6	158.7
35.0	168.8	168.2	167.3	166.1	164.6	163.1	161.2	159.4	157.3	155.2
37.5	166.8	166.1	164.9	163.6	161.8	160.0	158.0	156.0	153.6	151.3
40.0	165.4	164.3	162.8	161.2	159.1	157.0	154.6	152.2	149.6	147.2
42.5	164.7	163.3	161.4	159.1	156.5	154.0	151.2	148.4	145.6	142.8
45.0	165.2	163.3	160.8	157.8	154.6	151.3	147.9	144.7	141.2	138.1
47.5	166.8	164.5	161.6	157.7	153.6	149.3	144.9	140.9	137.1	133.5
50.0	168.1	165.9	162.7	158.7	153.7	148.3	142.8	137.7	133.0	128.8
52.5	169.1	166.8	163.6	159.3	154.2	148.3	141.6	135.2	129.3	124.2
55.0	169.8	167.3	163.9	159.6	154.4	148.2	141.3	133.6	126.3	120.0
57.5	170.1	167.6	164.1	159.7	154.2	147.9	140.8	132.9	124.3	116.4
60.0	170.0	167.5	163.9	159.2	153.6	147.2	139.9	131.8	122.9	113.6
62.5	169.5	166.9	163.3	158.5	152.9	146.2	138.7	130.4	121.4	111.8
65.0	168.9	166.2	162.4	157.6	151.8	145.0	137.3	128.9	119.5	109.7
67.5	167.8	165.0	161.2	156.3	150.3	143.4	135.6	127.0	117.5	107.4
70.0	166.2	163.5	159.6	154.6	148.7	141.5	133.5	124.8	115.2	104.9
72.5	164.4	161.6	157.6	152.7	146.5	139.4	131.3	122.4	112.6	102.2
75.0	162.2	159.5	155.5	150.4	144.1	137.0	128.8	119.7	109.8	99.29
77.5	159.8	157.0	152.9	147.8	141.5	134.2	125.9	116.8	106.7	96.10
80.0	156.9	154.1	150.0	144.8	138.5	131.2	122.8	113.7	103.5	92.71
82.5	153.7	151.0	146.8	141.7	135.2	127.9	119.4	110.2	99.99	89.15
85.0	150.2	147.4	143.3	138.1	131.6	124.3	115.7	106.4	96.17	85.30
87.5	146.2	143.4	139.3	134.1	127.7	120.3	111.9	102.6	92.26	81.29
90.0	141.9	139.2	135.0	130.0	123.5	116.1	107.6	98.36	88.06	77.14
92.5	137.3	134.6	130.5	125.3	118.9	111.7	103.1	93.83	83.50	72.60
95.0	132.4	129.7	125.5	120.4	114.0	106.8	98.29	89.11	78.79	67.95
97.5	127.2	124.5	120.3	115.3	108.9	101.7	93.22	84.05	73.79	63.09
100.0	121.6	118.9	114.9	109.9	103.5	96.33	87.92	78.84	68.69	58.06
102.5	115.7	113.1	109.0	104.2	97.84	90.77	82.43	73.42	63.38	52.95
105.0	109.6	107.0	103.0	98.16	91.91	84.93	76.68	67.82	57.99	47.80
107.5	103.2	100.7	96.71	91.97	85.75	78.86	70.78	62.12	52.47	42.61
110.0	96.49	94.05	90.15	85.43	79.39	72.69	64.72	56.28	46.97	37.54
112.5	89.55	87.17	83.34	78.75	72.82	66.27	58.54	50.41	41.44	32.49
115.0	82.38	80.14	76.35	71.97	66.06	59.75	52.38	44.58	35.99	27.80
117.5	75.07	72.89	69.28	64.93	59.29	53.23	46.26	38.73	30.95	23.89
120.0	67.68	65.56	62.08	57.82	52.51	46.90	40.15	33.32	26.66	20.96
122.5	60.27	58.29	54.91	50.90	46.04	40.74	34.49	28.70	23.24	18.01
125.0	52.99	51.14	47.89	44.37	39.96	35.10	29.63	25.21	19.88	16.45
127.5	46.06	44.39	41.33	38.37	34.48	30.30	26.14	21.67	18.06	14.72
130.0	39.75	38.33	35.72	33.33	30.17	26.50	22.63	19.61	16.24	13.10
132.5	34.53	33.31	31.64	29.40	25.91	23.11	20.61	17.36	14.24	11.61
135.0	30.13	28.67	27.24	25.64	23.36	20.96	18.31	15.21	12.36	9.856
137.5	26.75	25.64	24.83	23.21	20.98	18.69	15.80	13.18	10.77	8.222
140.0	24.24	23.38	22.35	20.77	18.55	16.20	13.58	11.24	8.956	6.687
142.5	21.69	20.90	19.87	18.33	16.04	13.78	11.56	9.416	7.248	5.292
145.0	18.94	18.42	17.22	15.78	13.42	11.52	9.425	7.563	5.734	4.038
147.5	15.96	15.71	14.60	13.10	11.04	9.280	7.558	5.965	4.364	2.872
150.0	13.40	13.04	12.00	10.47	8.772	7.317	5.803	4.430	3.037	1.853
152.5	10.81	10.37	9.354	8.041	6.548	5.345	4.091	2.983	1.911	1.263
155.0	8.132	7.743	6.701	5.602	4.467	3.536	2.592	1.788	1.277	1.255
157.5	5.487	5.152	4.231	3.451	2.679	2.042	1.442	1.289	1.289	1.281
160.0	3.001	2.715	2.157	1.764	1.389	1.302	1.294	1.294	1.294	1.298
162.5	1.325	1.311	1.315	1.307	1.307	1.311	1.311	1.307	1.315	1.342
165.0	1.311	1.311	1.315	1.315	1.320	1.320	1.324	1.333	1.328	1.376
167.5	1.311	1.315	1.320	1.324	1.324	1.333	1.333	1.337	1.681	1.823
170.0	1.518	1.537	1.518	1.455	1.367	1.328	1.345	1.589	1.589	1.593
172.5	1.498	1.515	1.519	1.510	1.458	1.619	1.584	1.584	1.589	1.584
175.0	1.288	1.298	1.302	1.307	1.567	1.571	1.580	1.580	1.580	1.580
177.5	1.289	1.289	1.289	1.558	1.558	1.563	1.571	1.571	1.571	1.571
180.0	1.272	1.328	1.545	1.545	1.550	1.550	1.554	1.558	1.558	1.558

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25DEG  
Operators: luominxian  
Test Date: 2017-08-01

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
Humidity: 70%  
Test Distance: 8.250m [K=1.0000]  
Remarks: 壁灯

Photometric Data Table [cd]

G/C	150.0	155.0	160.0	165.0	170.0	175.0	180.0	185.0	190.0	195.0
0.0	176.2	176.2	176.3	176.2	176.2	176.2	178.4	178.1	178.0	177.7
2.5	176.1	176.1	176.0	176.1	176.2	176.1	178.4	178.2	178.0	177.9
5.0	175.8	175.8	175.7	175.6	175.6	175.7	178.0	177.8	177.8	177.7
7.5	175.6	175.2	175.1	174.9	174.9	174.9	177.3	177.1	177.1	177.2
10.0	175.0	174.6	174.2	174.0	173.8	173.7	176.2	176.2	176.2	176.4
12.5	174.1	173.6	173.1	172.6	172.4	172.3	174.6	174.5	174.8	175.2
15.0	173.1	172.3	171.6	171.0	170.6	170.4	172.7	172.7	173.1	173.6
17.5	171.7	170.8	169.9	169.1	168.4	168.2	170.5	170.5	171.1	171.7
20.0	170.0	168.9	167.8	166.8	166.0	165.6	167.8	167.9	168.6	169.4
22.5	168.1	166.8	165.3	164.2	163.2	162.7	164.9	165.0	165.9	166.9
25.0	165.7	164.3	162.7	161.3	160.0	159.4	161.5	161.7	162.8	164.0
27.5	163.0	161.4	159.6	158.0	156.6	155.8	157.8	158.1	159.3	160.7
30.0	160.0	158.2	156.2	154.5	152.8	151.9	153.8	154.1	155.5	157.1
32.5	156.6	154.6	152.5	150.5	148.7	148.0	149.3	149.8	151.3	153.1
35.0	152.9	150.7	148.3	146.2	144.2	143.4	144.6	145.1	146.8	148.9
37.5	148.9	146.5	144.0	141.8	139.4	138.2	139.6	140.2	142.0	144.2
40.0	144.4	142.0	139.2	136.9	134.5	132.8	134.3	134.9	136.9	139.3
42.5	139.8	137.2	134.2	131.7	129.1	127.3	128.7	129.2	131.5	134.0
45.0	135.0	132.0	128.9	126.2	123.3	121.4	122.7	123.3	125.8	128.5
47.5	129.8	126.7	123.3	120.3	117.4	115.4	116.4	117.1	119.8	122.7
50.0	124.7	121.1	117.4	114.3	111.3	109.0	109.8	110.7	113.4	116.6
52.5	119.4	115.4	111.5	108.1	104.7	102.4	103.0	103.9	106.9	110.2
55.0	114.3	109.7	105.2	101.6	98.13	95.77	95.97	96.93	100.1	103.7
57.5	109.6	104.0	99.01	94.96	91.42	89.53	88.66	89.64	93.06	96.93
60.0	105.2	98.51	92.75	88.18	84.03	81.52	81.14	82.22	85.84	90.06
62.5	101.7	93.43	86.57	81.32	76.73	73.65	73.45	74.60	78.50	83.15
65.0	99.08	88.94	80.77	74.64	69.42	66.00	65.61	66.85	71.09	76.27
67.5	96.57	85.35	75.38	68.07	62.18	58.29	57.66	59.05	63.67	69.51
70.0	93.90	82.45	70.88	61.85	55.09	50.62	49.71	51.27	56.34	63.03
72.5	91.01	79.38	67.18	56.28	48.19	43.08	41.79	43.51	49.14	57.07
75.0	87.89	76.13	63.71	51.46	41.72	35.77	34.02	35.96	42.36	51.79
77.5	84.59	72.68	60.17	47.52	35.98	28.79	26.53	28.74	36.09	47.35
80.0	81.07	69.09	56.41	43.76	31.15	22.40	19.46	22.02	30.60	43.10
82.5	77.36	65.27	52.53	39.86	27.21	16.83	13.04	16.00	26.07	38.69
85.0	73.52	61.33	48.58	35.90	23.41	12.43	7.562	11.04	21.85	34.29
87.5	69.48	57.32	44.49	31.93	19.68	9.185	3.403	7.406	17.80	29.90
90.0	65.27	53.07	40.40	27.99	16.13	6.408	1.035	4.572	13.97	25.56
92.5	60.84	48.72	36.18	24.05	12.81	4.189	0.4296	2.487	10.49	21.39
95.0	56.19	44.27	31.94	20.30	9.873	2.691	0.4037	1.398	7.529	17.38
97.5	51.43	39.74	27.82	16.78	7.425	1.922	0.4037	1.043	5.256	13.75
100.0	46.65	35.24	23.81	13.62	5.750	1.610	0.4038	0.7957	4.005	10.65
102.5	41.81	30.80	20.06	11.02	4.713	1.297	0.4124	0.5520	3.390	8.336
105.0	37.01	26.54	16.77	9.232	4.240	0.9710	0.4169	0.4644	2.947	6.941
107.5	32.32	22.64	14.10	7.918	3.738	0.6637	0.4342	0.4644	2.473	6.306
110.0	27.86	19.15	12.26	7.189	3.188	0.5991	0.4602	0.4731	1.963	5.614
112.5	23.69	16.34	10.61	6.384	2.585	0.6251	0.4863	0.5033	1.451	4.866
115.0	20.23	14.16	9.702	5.662	2.026	0.6468	0.5124	0.5338	0.9709	4.192
117.5	17.94	12.96	8.847	4.932	1.495	0.6730	0.5513	0.5600	0.6467	3.516
120.0	15.61	11.94	7.965	4.193	1.003	0.7033	0.5860	0.6032	0.6602	2.834
122.5	14.23	10.88	7.027	3.408	0.8116	0.7380	0.6300	0.6465	0.6947	2.105
125.0	13.03	9.594	5.901	2.581	0.8289	0.7814	0.6774	0.6899	0.7337	1.438
127.5	11.67	8.208	4.802	1.847	0.8723	0.8206	0.7250	0.7379	0.7638	0.8788
130.0	10.06	6.835	3.774	1.240	0.8985	0.8682	0.7640	0.7764	0.7944	0.8204
132.5	8.486	5.605	2.854	0.9856	0.9418	0.9245	0.8031	0.8459	0.8249	0.8549
135.0	7.029	4.453	2.036	1.016	0.9721	0.9560	0.8379	0.8460	0.8685	0.8898
137.5	5.695	3.400	1.385	1.051	1.016	0.9985	0.8769	0.8683	0.8769	0.8856
140.0	4.467	2.459	1.107	1.085	1.059	1.046	0.9030	0.8984	0.9072	0.9114
142.5	3.343	1.665	1.133	1.111	1.128	1.108	0.9290	0.9289	0.9476	0.9332
145.0	2.357	1.198	1.155	1.133	1.128	1.112	0.9593	0.9593	0.9594	0.9634
147.5	1.528	1.189	1.181	1.164	1.240	1.146	0.9897	0.9982	0.9993	0.9896
150.0	1.228	1.220	1.207	1.198	1.213	1.176	1.033	1.029	1.110	1.038
152.5	1.241	1.237	1.224	1.224	1.211	1.203	1.055	1.050	1.050	1.042
155.0	1.250	1.246	1.311	1.411	1.298	1.220	1.099	1.089	1.090	1.211
157.5	1.280	1.272	1.263	1.293	1.268	1.246	1.142	1.120	1.116	1.217
160.0	1.298	1.289	1.285	1.281	1.263	1.263	1.168	1.150	1.155	1.137
162.5	1.437	1.437	1.340	1.329	1.523	1.303	1.203	1.194	1.308	1.404
165.0	1.610	1.772	1.715	1.584	1.558	1.558	1.485	1.471	1.467	1.454
167.5	1.819	1.727	1.610	1.589	1.580	1.576	1.498	1.484	1.485	1.471
170.0	1.598	1.593	1.589	1.584	1.584	1.576	1.511	1.498	1.502	1.484
172.5	1.584	1.589	1.589	1.584	1.584	1.584	1.532	1.524	1.524	1.510
175.0	1.584	1.588	1.580	1.576	1.584	1.580	1.554	1.545	1.545	1.541
177.5	1.576	1.580	1.576	1.576	1.580	1.571	1.580	1.567	1.567	1.554
180.0	1.563	1.563	1.563	1.563	1.563	1.563	1.589	1.576	1.580	1.558

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	200.0	205.0	210.0	215.0	220.0	225.0	230.0	235.0	240.0	245.0
0.0	177.6	177.5	177.5	177.4	177.4	177.4	177.3	177.3	177.2	177.1
2.5	177.9	177.8	177.8	177.8	177.8	177.9	177.9	177.9	177.9	177.9
5.0	177.8	177.8	177.9	178.1	178.2	178.3	178.4	178.7	178.6	178.7
7.5	177.4	177.5	177.7	178.1	178.4	178.7	178.9	179.3	179.4	179.7
10.0	176.7	177.0	177.4	178.0	178.3	178.9	179.3	179.8	180.0	180.4
12.5	175.6	176.2	176.8	177.5	178.2	178.8	179.4	180.0	180.5	180.9
15.0	174.3	175.0	175.9	176.8	177.7	178.5	179.3	180.0	180.6	181.1
17.5	172.6	173.5	174.7	175.7	176.8	177.8	178.8	179.7	180.5	181.1
20.0	170.6	171.8	173.1	174.3	175.6	176.8	178.0	179.0	180.0	180.7
22.5	168.3	169.6	171.2	172.7	174.2	175.4	176.8	178.0	179.1	179.9
25.0	165.6	167.1	168.8	170.5	172.3	173.7	175.3	176.6	177.9	178.8
27.5	162.6	164.3	166.2	168.1	170.0	171.7	173.4	174.9	176.3	177.3
30.0	159.2	161.1	163.3	165.3	167.4	169.3	171.2	172.8	174.4	175.5
32.5	155.5	157.5	160.0	162.1	164.5	166.6	168.6	170.4	172.2	173.5
35.0	151.4	153.7	156.3	158.7	161.2	163.5	165.8	167.8	169.8	171.4
37.5	146.9	149.5	152.3	154.9	157.7	160.2	162.8	165.0	167.3	169.2
40.0	142.2	145.0	148.0	150.8	153.9	156.7	159.6	162.2	164.9	167.3
42.5	137.2	140.2	143.4	146.5	149.9	153.0	156.4	159.6	162.7	165.7
45.0	131.9	135.1	138.7	142.0	145.8	149.4	153.3	157.3	161.1	165.0
47.5	126.3	129.7	133.6	137.4	141.7	146.0	150.7	155.7	160.6	165.6
50.0	120.4	124.2	128.5	132.8	137.8	143.0	148.9	155.1	161.0	166.3
52.5	114.3	118.4	123.3	128.3	134.2	140.7	148.1	155.1	161.2	166.6
55.0	108.1	112.7	118.2	124.2	131.4	139.5	147.5	154.7	161.0	166.6
57.5	101.8	107.0	113.3	120.6	129.5	138.3	146.6	153.9	160.5	166.2
60.0	95.46	101.4	108.9	117.9	127.7	136.9	145.3	152.9	159.6	165.4
62.5	89.20	96.17	105.2	115.7	125.8	135.1	143.8	151.5	158.5	164.4
65.0	83.15	91.55	102.4	113.2	123.6	133.0	141.9	149.9	156.9	162.9
67.5	77.56	87.76	99.50	110.5	121.1	130.8	139.8	147.9	155.1	161.2
70.0	72.57	84.38	96.35	107.6	118.4	128.2	137.4	145.6	152.9	159.2
72.5	68.46	80.83	92.96	104.4	115.3	125.3	134.6	143.0	150.5	156.8
75.0	64.55	77.04	89.35	101.0	112.1	122.2	131.6	140.1	147.7	154.1
77.5	60.44	73.13	85.62	97.32	108.5	118.8	128.4	136.9	144.6	151.1
80.0	56.25	69.03	81.61	93.44	104.8	115.1	124.8	133.4	141.2	147.7
82.5	51.89	64.72	77.43	89.32	100.8	111.2	121.0	129.5	137.4	143.9
85.0	47.45	60.29	73.09	85.03	96.54	107.0	116.9	125.5	133.3	139.8
87.5	42.91	55.73	68.51	80.51	92.08	102.6	112.5	121.1	128.9	135.5
90.0	38.35	51.06	63.82	75.80	87.39	97.85	107.8	116.5	124.3	130.8
92.5	33.72	46.22	58.84	70.78	82.33	92.77	102.7	111.3	119.1	125.6
95.0	29.16	41.35	53.80	65.60	77.11	87.47	97.34	105.9	113.6	120.1
97.5	24.76	36.47	48.64	60.26	71.60	81.86	91.65	100.2	108.0	114.5
100.0	20.55	31.60	43.39	54.78	65.98	76.21	85.90	94.36	102.2	108.6
102.5	16.79	27.00	38.24	49.30	60.27	70.32	79.91	88.30	96.00	102.4
105.0	13.60	22.66	33.19	43.78	54.47	64.28	73.73	81.99	89.62	95.88
107.5	11.32	18.83	28.36	38.36	48.62	58.17	67.44	75.51	82.99	89.18
110.0	9.848	15.66	23.91	33.12	42.85	52.02	61.00	68.91	76.23	82.28
112.5	8.949	13.56	19.94	28.07	37.15	45.91	54.52	62.20	69.30	75.17
115.0	8.125	12.21	17.03	23.58	31.57	39.88	48.11	55.41	62.27	67.99
117.5	7.295	11.27	15.23	20.16	26.65	33.87	41.83	48.72	55.26	60.71
120.0	6.440	10.30	13.98	17.81	22.88	28.61	35.64	42.28	48.36	53.53
122.5	5.571	9.286	12.79	16.34	20.15	24.57	29.99	36.13	41.82	46.53
125.0	4.526	8.026	11.64	14.79	18.09	21.74	25.65	30.57	35.85	39.98
127.5	3.503	6.697	10.24	13.24	16.46	19.79	22.70	26.26	30.60	34.25
130.0	2.569	5.422	8.646	11.74	14.67	17.83	20.80	23.27	26.63	29.71
132.5	1.764	4.273	7.154	10.14	12.72	15.59	19.11	21.31	23.73	26.46
135.0	1.137	3.233	5.812	8.515	11.26	13.76	16.72	19.34	21.60	23.99
137.5	0.8942	2.243	4.500	6.886	9.441	11.62	14.24	17.04	19.42	21.32
140.0	0.9116	1.452	3.341	5.446	7.698	9.919	12.20	14.55	17.05	18.94
142.5	0.9203	0.9426	2.307	4.136	6.107	8.074	10.17	12.32	14.55	16.56
145.0	0.9463	0.9550	1.468	2.978	4.688	6.358	8.193	10.01	12.07	14.09
147.5	0.9768	0.9810	0.9812	1.934	3.390	4.886	6.450	7.993	9.670	11.45
150.0	1.011	1.003	1.007	1.139	2.189	3.427	4.796	6.135	7.608	9.118
152.5	1.037	1.024	1.025	1.063	1.261	2.137	3.231	4.309	5.507	6.765
155.0	1.133	1.055	1.046	1.089	1.085	1.185	1.895	2.703	3.597	4.530
157.5	1.158	1.089	1.090	1.124	1.124	1.137	1.137	1.453	2.003	2.626
160.0	1.125	1.120	1.120	1.159	1.159	1.163	1.163	1.168	1.120	1.238
162.5	1.175	1.168	1.174	1.197	1.189	1.198	1.194	1.194	1.155	1.146
165.0	1.502	1.628	1.637	1.389	1.228	1.224	1.229	1.228	1.189	1.172
167.5	1.467	1.468	1.476	1.598	1.699	1.250	1.237	1.237	1.216	1.189
170.0	1.485	1.472	1.472	1.511	1.515	1.519	1.507	1.250	1.228	1.219
172.5	1.506	1.493	1.498	1.532	1.537	1.541	1.545	1.545	1.255	1.346
175.0	1.528	1.519	1.524	1.545	1.550	1.554	1.554	1.554	1.611	1.375
177.5	1.550	1.537	1.537	1.558	1.558	1.563	1.567	1.567	2.275	1.550
180.0	1.554	1.545	1.545	1.571	1.567	1.576	1.580	1.576	1.749	1.554

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	250.0	255.0	260.0	265.0	270.0	275.0	280.0	285.0	290.0	295.0
0.0	177.2	177.2	177.1	177.0	177.9	176.8	176.6	176.6	176.6	176.5
2.5	177.9	177.9	177.9	177.8	177.7	177.6	177.5	177.4	177.2	177.3
5.0	178.9	178.9	178.9	178.9	178.8	178.7	178.6	178.3	178.2	178.0
7.5	179.9	180.0	180.0	180.0	179.9	179.8	179.6	179.3	179.1	178.8
10.0	180.7	180.9	180.9	181.0	180.9	180.8	180.5	180.3	179.9	179.6
12.5	181.3	181.6	181.7	181.8	181.7	181.5	181.3	181.0	180.4	180.0
15.0	181.6	182.0	182.2	182.3	182.3	182.1	181.8	181.2	180.8	180.2
17.5	181.6	182.1	182.3	182.5	182.5	182.2	181.9	181.3	180.8	180.0
20.0	181.3	181.9	182.2	182.4	182.3	182.1	181.6	181.1	180.4	179.6
22.5	180.7	181.3	181.6	181.9	181.8	181.5	181.1	180.5	179.7	178.7
25.0	179.7	180.4	180.8	181.1	180.9	180.7	180.2	179.5	178.7	177.4
27.5	178.3	179.1	179.6	179.9	179.8	179.5	179.1	178.2	177.2	176.0
30.0	176.7	177.6	178.1	178.5	178.4	178.1	177.5	176.7	175.5	174.2
32.5	174.9	175.9	176.6	177.0	176.9	176.6	175.9	174.9	173.8	172.1
35.0	173.0	174.1	174.9	175.4	175.4	175.1	174.4	173.1	171.8	169.9
37.5	171.1	172.5	173.5	174.2	174.2	173.9	173.1	171.6	170.0	167.8
40.0	169.5	171.2	172.5	173.4	173.5	173.1	172.2	170.5	168.5	166.0
42.5	168.5	170.7	172.5	173.6	174.0	173.5	172.3	170.3	167.8	164.7
45.0	168.6	171.6	173.8	175.4	176.0	175.1	173.8	171.5	168.2	164.4
47.5	169.8	172.9	175.3	177.3	177.3	176.8	175.2	172.8	169.5	165.3
50.0	170.6	173.9	176.3	178.0	178.4	178.0	176.2	173.7	170.3	165.9
52.5	171.1	174.5	177.0	178.5	179.2	178.7	176.8	174.3	170.7	166.3
55.0	171.1	174.8	177.3	178.9	179.6	178.9	177.2	174.5	170.9	166.2
57.5	170.9	174.7	177.3	178.9	179.5	178.8	177.2	174.3	170.6	165.8
60.0	170.4	174.2	176.9	178.5	179.0	178.4	176.7	173.8	169.9	165.1
62.5	169.4	173.3	176.1	177.8	178.3	177.6	175.9	173.0	169.0	164.1
65.0	168.1	172.1	174.9	176.6	177.2	176.5	174.8	171.8	167.8	162.5
67.5	166.5	170.5	173.4	175.2	175.7	175.1	173.3	170.1	166.1	160.7
70.0	164.5	168.5	171.6	173.4	173.9	173.2	171.3	168.2	164.0	158.7
72.5	162.2	166.3	169.4	171.0	171.7	170.9	169.1	165.9	161.8	156.3
75.0	159.5	163.7	166.8	168.5	169.2	168.3	166.4	163.3	159.0	153.5
77.5	156.5	160.7	163.9	165.6	166.2	165.4	163.5	160.3	156.0	150.4
80.0	153.2	157.4	160.6	162.2	163.0	162.2	160.3	157.0	152.7	147.0
82.5	149.5	153.8	157.0	158.6	159.4	158.5	156.6	153.2	148.9	143.1
85.0	145.4	149.7	153.0	154.6	155.3	154.4	152.5	149.1	144.8	139.0
87.5	141.1	145.3	148.5	150.3	150.9	150.0	148.1	144.5	140.4	134.6
90.0	136.4	140.5	143.8	145.5	145.9	145.2	143.3	140.0	135.7	129.9
92.5	131.2	135.2	138.5	140.2	140.9	140.1	138.3	134.9	130.5	124.8
95.0	125.7	130.0	133.2	134.8	135.5	134.7	132.9	129.5	125.3	119.5
97.5	120.0	124.3	127.5	129.1	129.8	129.0	127.1	123.8	119.6	113.9
100.0	114.1	118.3	121.5	123.1	123.8	123.0	121.2	117.9	113.6	107.9
102.5	107.9	112.0	115.2	116.9	117.5	116.7	115.0	111.6	107.5	101.7
105.0	101.4	105.4	108.6	110.3	111.0	110.1	108.4	105.1	100.9	95.29
107.5	94.64	98.59	101.7	103.3	104.1	103.2	101.5	98.25	94.13	88.60
110.0	87.66	91.54	94.61	96.16	96.94	96.00	94.37	91.15	87.16	81.67
112.5	80.45	84.24	87.28	88.81	89.56	88.64	87.03	83.85	79.97	74.60
115.0	73.08	76.78	79.76	81.23	81.97	81.09	79.49	76.37	72.59	67.40
117.5	65.62	69.17	72.04	73.48	74.19	73.35	71.83	68.78	65.14	60.09
120.0	58.19	61.53	64.32	65.67	66.34	65.51	64.06	61.19	57.72	52.91
122.5	50.86	54.01	56.62	57.89	58.55	57.74	56.38	53.69	50.41	46.01
125.0	43.93	46.77	49.16	50.33	50.92	50.19	48.97	46.45	43.51	39.57
127.5	37.53	40.08	42.16	43.20	43.72	43.10	42.03	39.82	37.29	33.95
130.0	32.25	34.31	36.03	36.88	37.31	36.79	35.90	34.15	32.17	29.71
132.5	28.55	30.06	31.26	31.86	32.21	31.82	31.21	30.07	28.51	26.72
135.0	25.81	26.81	27.76	28.21	28.47	28.22	27.83	27.01	26.00	24.57
137.5	23.52	24.45	25.40	25.78	26.01	25.79	25.42	24.62	23.66	22.27
140.0	21.17	22.10	22.97	23.33	23.55	23.35	22.97	22.22	21.28	19.94
142.5	18.65	19.71	20.47	20.83	21.02	20.83	20.47	19.75	18.88	17.60
145.0	16.09	17.14	17.84	18.29	18.48	18.28	17.96	17.26	16.43	15.22
147.5	13.35	14.58	15.25	15.69	15.89	15.69	15.40	14.72	13.96	12.82
150.0	10.94	12.01	12.63	13.07	13.26	13.07	12.80	12.16	11.44	10.38
152.5	8.294	9.450	10.03	10.43	10.62	10.43	10.17	9.578	8.938	7.960
155.0	5.734	6.872	7.419	7.798	7.963	7.787	7.561	7.028	6.448	5.577
157.5	3.424	4.261	4.872	5.034	5.387	5.230	5.032	4.561	4.078	3.323
160.0	1.626	2.037	2.512	2.632	2.964	2.834	2.691	2.315	1.971	1.507
162.5	1.137	1.137	1.129	1.117	1.111	1.352	1.333	1.337	1.346	1.350
165.0	1.163	1.159	1.146	1.129	1.120	1.376	1.372	1.367	1.376	1.385
167.5	1.185	1.181	1.168	1.159	1.146	1.298	1.437	1.501	1.507	1.471
170.0	1.268	1.331	1.320	1.293	1.225	1.168	1.654	1.662	1.667	1.688
172.5	1.428	1.454	1.446	1.441	1.411	1.298	1.541	1.567	1.579	1.554
175.0	1.267	1.277	1.276	1.268	1.254	1.233	1.228	1.506	1.558	1.511
177.5	1.550	1.272	1.276	1.276	1.276	1.259	1.250	1.528	1.537	1.528
180.0	1.550	1.558	1.285	1.285	1.298	1.285	1.272	1.333	1.541	1.545

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	300.0	305.0	310.0	315.0	320.0	325.0	330.0	335.0	340.0	345.0
0.0	176.4	176.4	176.3	176.3	176.3	176.3	176.2	176.2	176.3	176.2
2.5	177.0	176.9	176.9	176.7	176.6	176.5	176.3	176.3	176.2	176.1
5.0	177.7	177.6	177.3	177.1	176.8	176.5	176.4	176.1	175.8	175.7
7.5	178.5	178.1	177.7	177.4	176.8	176.5	176.0	175.6	175.3	174.8
10.0	179.1	178.5	178.0	177.3	176.8	176.1	175.5	174.9	174.3	173.8
12.5	179.3	178.8	178.0	177.2	176.3	175.5	174.7	173.8	173.2	172.3
15.0	179.4	178.6	177.7	176.8	175.7	174.6	173.5	172.5	171.5	170.5
17.5	179.2	178.1	177.1	175.9	174.7	173.4	172.1	170.9	169.6	168.5
20.0	178.5	177.4	176.1	174.8	173.3	171.8	170.4	168.8	167.5	166.0
22.5	177.6	176.2	174.9	173.3	171.7	169.9	168.2	166.5	164.9	163.1
25.0	176.3	174.7	173.2	171.4	169.6	167.6	165.8	163.8	162.0	160.1
27.5	174.6	173.0	171.2	169.2	167.3	165.2	163.0	160.7	158.7	156.5
30.0	172.7	170.8	168.9	166.7	164.6	162.1	159.8	157.4	155.0	152.7
32.5	170.4	168.3	166.2	163.8	161.5	158.9	156.4	153.6	151.2	148.6
35.0	168.0	165.7	163.3	160.8	158.2	155.3	152.6	149.6	146.9	144.1
37.5	165.6	163.0	160.3	157.3	154.5	151.4	148.4	145.3	142.4	139.3
40.0	163.3	160.2	157.2	153.8	150.7	147.3	144.1	140.6	137.5	134.2
42.5	161.4	157.8	154.1	150.3	146.7	142.9	139.4	135.7	132.3	128.8
45.0	160.2	155.8	151.4	146.9	142.7	138.4	134.5	130.5	126.9	123.1
47.5	160.4	154.7	149.2	143.8	138.8	133.9	129.6	125.1	121.2	117.2
50.0	160.7	154.9	148.1	141.4	135.3	129.5	124.5	119.6	115.3	110.9
52.5	160.9	154.7	147.8	140.0	132.3	125.5	119.5	114.0	109.3	104.6
55.0	160.7	154.2	147.1	139.1	130.5	122.0	114.9	108.5	103.1	98.08
57.5	160.1	153.5	146.1	137.9	129.0	119.4	110.6	103.2	97.03	91.35
60.0	159.2	152.4	144.9	136.3	127.3	117.4	107.1	98.06	90.97	84.69
62.5	158.0	151.1	143.2	134.6	125.3	115.1	104.6	93.78	85.20	78.01
65.0	156.5	149.3	141.4	132.5	123.0	112.6	101.8	90.28	79.87	71.49
67.5	154.5	147.3	139.2	130.1	120.5	109.9	98.90	87.14	75.25	65.37
70.0	152.4	144.9	136.7	127.5	117.7	106.9	95.71	83.78	71.51	59.72
72.5	149.9	142.3	134.0	124.6	114.6	103.8	92.30	80.15	67.79	54.85
75.0	147.0	139.4	130.9	121.4	111.4	100.3	88.75	76.38	63.81	50.73
77.5	143.9	136.1	127.6	118.0	107.8	96.58	84.89	72.44	59.75	46.50
80.0	140.4	132.6	124.0	114.3	103.9	92.63	80.84	68.23	55.42	42.15
82.5	136.6	128.7	120.0	110.1	99.76	88.38	76.57	63.95	51.09	37.87
85.0	132.2	124.4	115.8	106.0	95.59	84.15	72.21	59.48	46.66	33.48
87.5	128.1	120.1	111.5	101.6	91.12	79.62	67.69	54.94	42.13	29.12
90.0	123.4	115.4	106.7	96.77	86.36	74.81	62.90	50.16	37.52	24.82
92.5	118.3	110.3	101.6	91.73	81.24	69.76	57.87	45.30	32.89	20.64
95.0	113.0	105.0	96.35	86.43	76.06	64.56	52.81	40.42	28.35	16.76
97.5	107.3	99.43	90.75	80.91	70.60	59.21	47.60	35.49	23.99	13.33
100.0	101.4	93.52	85.02	75.26	64.98	53.76	42.40	30.74	19.91	10.52
102.5	95.33	87.44	78.99	69.34	59.24	48.25	37.27	26.22	16.34	8.653
105.0	88.96	81.20	72.82	63.28	53.37	42.75	32.25	22.01	13.50	7.697
107.5	82.32	74.67	66.51	57.17	47.55	37.36	27.57	18.46	11.69	7.003
110.0	75.54	68.04	60.04	50.99	41.83	32.23	23.39	15.78	10.65	6.288
112.5	68.63	61.32	53.59	44.93	36.29	27.56	19.95	14.13	9.800	5.560
115.0	61.59	54.58	47.21	39.08	31.19	23.59	17.67	13.10	8.897	4.790
117.5	54.58	47.90	41.04	33.64	26.78	20.71	16.19	12.06	7.982	4.011
120.0	47.77	41.57	35.35	28.93	23.38	18.81	14.99	10.99	7.031	3.231
122.5	41.28	35.78	30.44	25.30	21.06	17.48	13.76	9.901	6.081	2.460
125.0	35.45	30.80	26.67	22.73	19.56	16.09	12.52	8.771	5.114	1.701
127.5	30.63	27.24	24.01	21.09	18.04	14.68	11.22	7.617	4.136	1.060
130.0	27.24	24.68	22.22	19.43	16.48	13.24	9.919	6.459	3.190	0.8724
132.5	24.96	22.80	20.45	17.77	14.92	11.80	8.621	5.342	2.286	0.9155
135.0	22.96	20.92	18.68	16.09	13.36	10.36	7.330	4.222	1.517	0.9808
137.5	20.72	18.73	16.61	14.13	11.55	8.706	5.858	2.987	1.068	0.9379
140.0	18.45	16.55	14.50	12.16	9.736	7.069	4.427	1.891	1.059	0.9290
142.5	16.17	14.38	12.47	10.23	7.971	5.492	3.093	1.138	1.077	0.9463
145.0	13.90	12.19	10.40	8.338	6.223	3.956	1.899	1.124	1.112	0.9722
147.5	11.58	10.01	8.343	6.430	4.507	2.529	1.176	1.155	1.155	1.047
150.0	9.251	7.804	6.291	4.568	2.896	1.373	1.189	1.181	1.181	1.033
152.5	6.933	5.630	4.301	2.804	1.536	1.228	1.215	1.211	1.286	1.080
155.0	4.686	3.536	2.458	1.415	1.259	1.263	1.255	1.254	1.327	1.164
157.5	2.614	1.755	1.302	1.298	1.302	1.306	1.307	1.311	1.302	1.115
160.0	1.333	1.324	1.324	1.332	1.337	1.362	1.377	1.363	1.359	1.159
162.5	1.363	1.359	1.359	1.376	1.420	1.589	1.589	1.558	1.376	1.380
165.0	1.398	1.393	1.420	1.597	1.645	1.667	1.575	1.428	1.406	1.402
167.5	1.424	1.424	1.428	1.446	1.471	1.486	1.454	1.441	1.437	1.437
170.0	1.602	1.471	1.454	1.458	1.458	1.458	1.463	1.454	1.454	1.454
172.5	1.510	1.480	1.489	1.493	1.493	1.498	1.489	1.493	1.489	1.497
175.0	1.511	1.515	1.515	1.519	1.524	1.524	1.528	1.528	1.528	1.528
177.5	1.528	1.537	1.541	1.545	1.545	1.545	1.550	1.550	1.554	1.545
180.0	1.550	1.550	1.554	1.558	1.558	1.563	1.563	1.563	1.567	1.563

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2017-08-01

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks: 壁灯


## Photometric Data Table [cd]

G/C	350.0	355.0
0.0	176.2	176.2
2.5	176.0	175.9
5.0	175.6	175.3
7.5	174.6	174.3
10.0	173.3	172.9
12.5	171.8	171.1
15.0	169.8	169.0
17.5	167.4	166.5
20.0	164.8	163.7
22.5	161.8	160.6
25.0	158.5	157.0
27.5	154.8	153.2
30.0	150.7	149.0
32.5	146.5	144.4
35.0	141.8	139.5
37.5	136.7	134.3
40.0	131.5	128.8
42.5	125.9	123.0
45.0	120.0	117.0
47.5	113.8	110.7
50.0	107.4	104.1
52.5	100.8	97.21
55.0	93.87	90.14
57.5	86.84	82.84
60.0	79.72	75.33
62.5	72.47	67.76
65.0	65.22	60.12
67.5	58.16	52.47
70.0	51.27	44.87
72.5	44.75	37.52
75.0	38.81	30.49
77.5	33.73	23.98
80.0	29.38	18.21
82.5	25.17	13.50
85.0	21.06	9.868
87.5	17.08	6.727
90.0	13.36	4.203
92.5	10.07	2.522
95.0	7.366	1.846
97.5	5.496	1.542
100.0	4.618	1.199
102.5	4.095	0.8568
105.0	3.560	0.5733
107.5	3.003	0.5427
110.0	2.423	0.5427
112.5	1.846	0.5469
115.0	1.283	0.5686
117.5	0.8143	0.5988
120.0	0.6989	0.6337
122.5	0.7293	0.6727
125.0	0.7597	0.7205
127.5	0.7901	0.7552
130.0	0.8162	0.7983
132.5	0.8727	0.8373
135.0	0.9201	0.8815
137.5	0.9115	0.8813
140.0	0.9163	0.9029
142.5	0.9505	0.9287
145.0	0.9636	0.9548
147.5	1.084	0.9939
150.0	1.025	1.024
152.5	1.050	1.046
155.0	1.085	1.076
157.5	1.107	1.111
160.0	1.142	1.146
162.5	1.372	1.185
165.0	1.402	1.398
167.5	1.432	1.428
170.0	1.454	1.454
172.5	1.493	1.493
175.0	1.528	1.528
177.5	1.550	1.550
180.0	1.567	1.558

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2017-08-01


$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.250m [K=1.0000]  
 Remarks: 壁灯

I (cd)

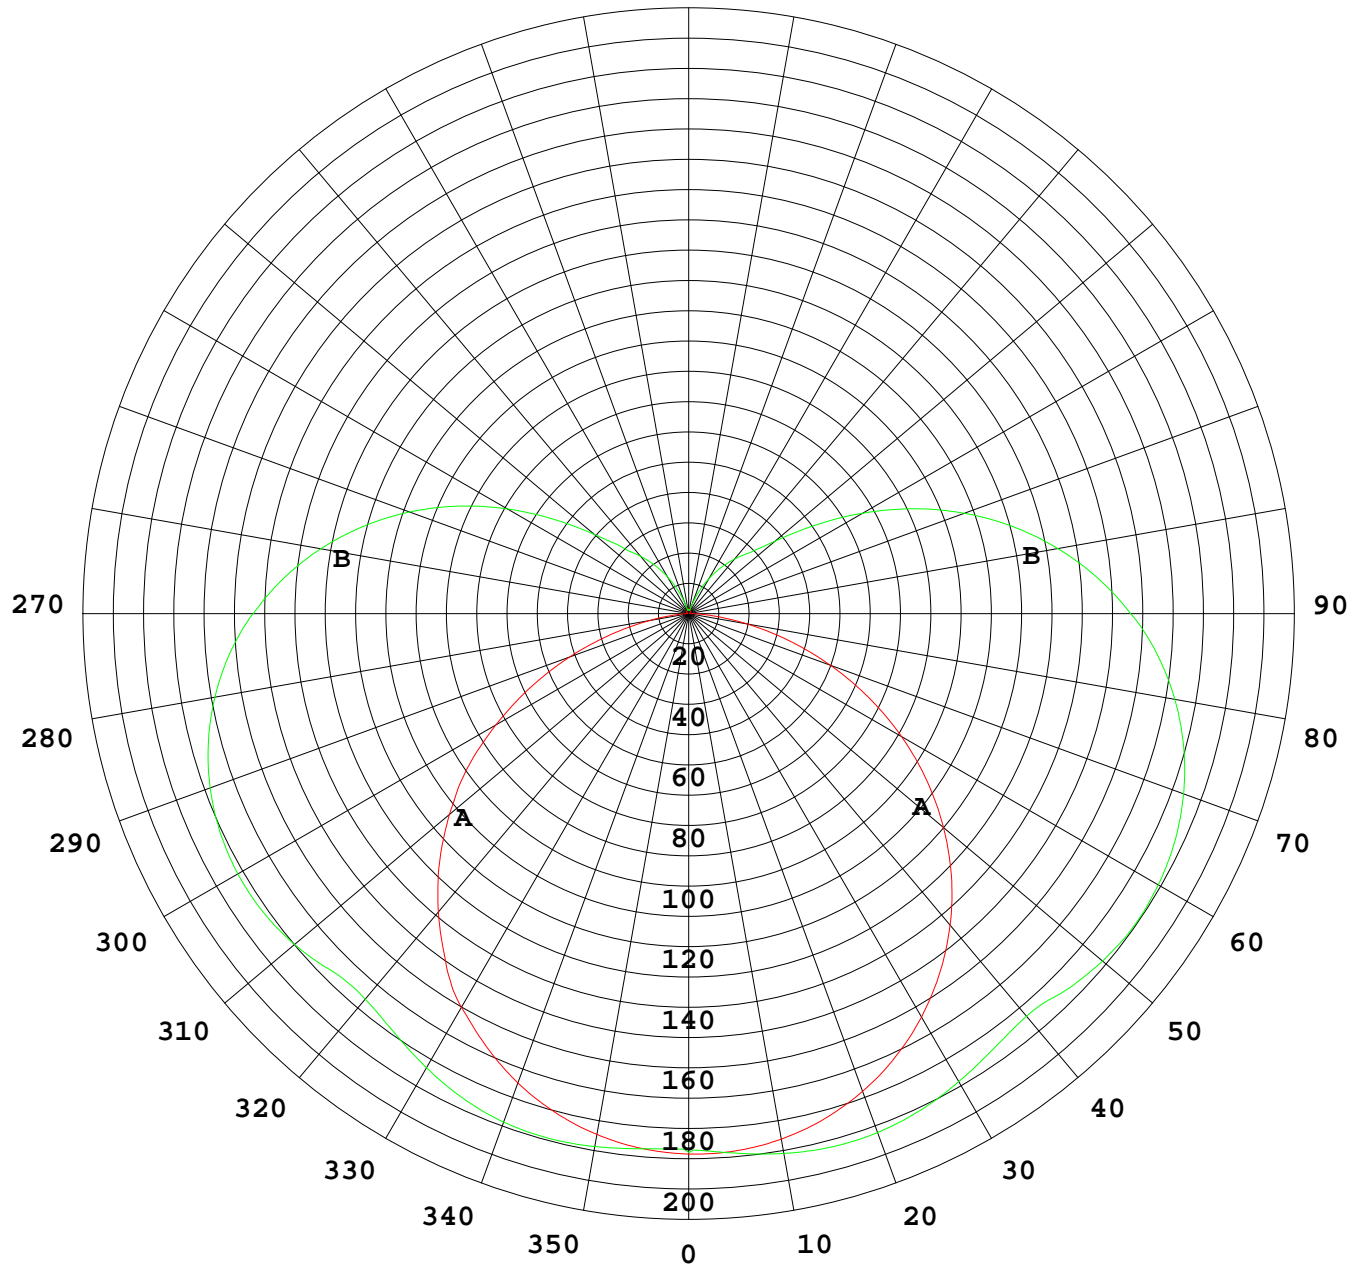

1000 lm

$K = 1$

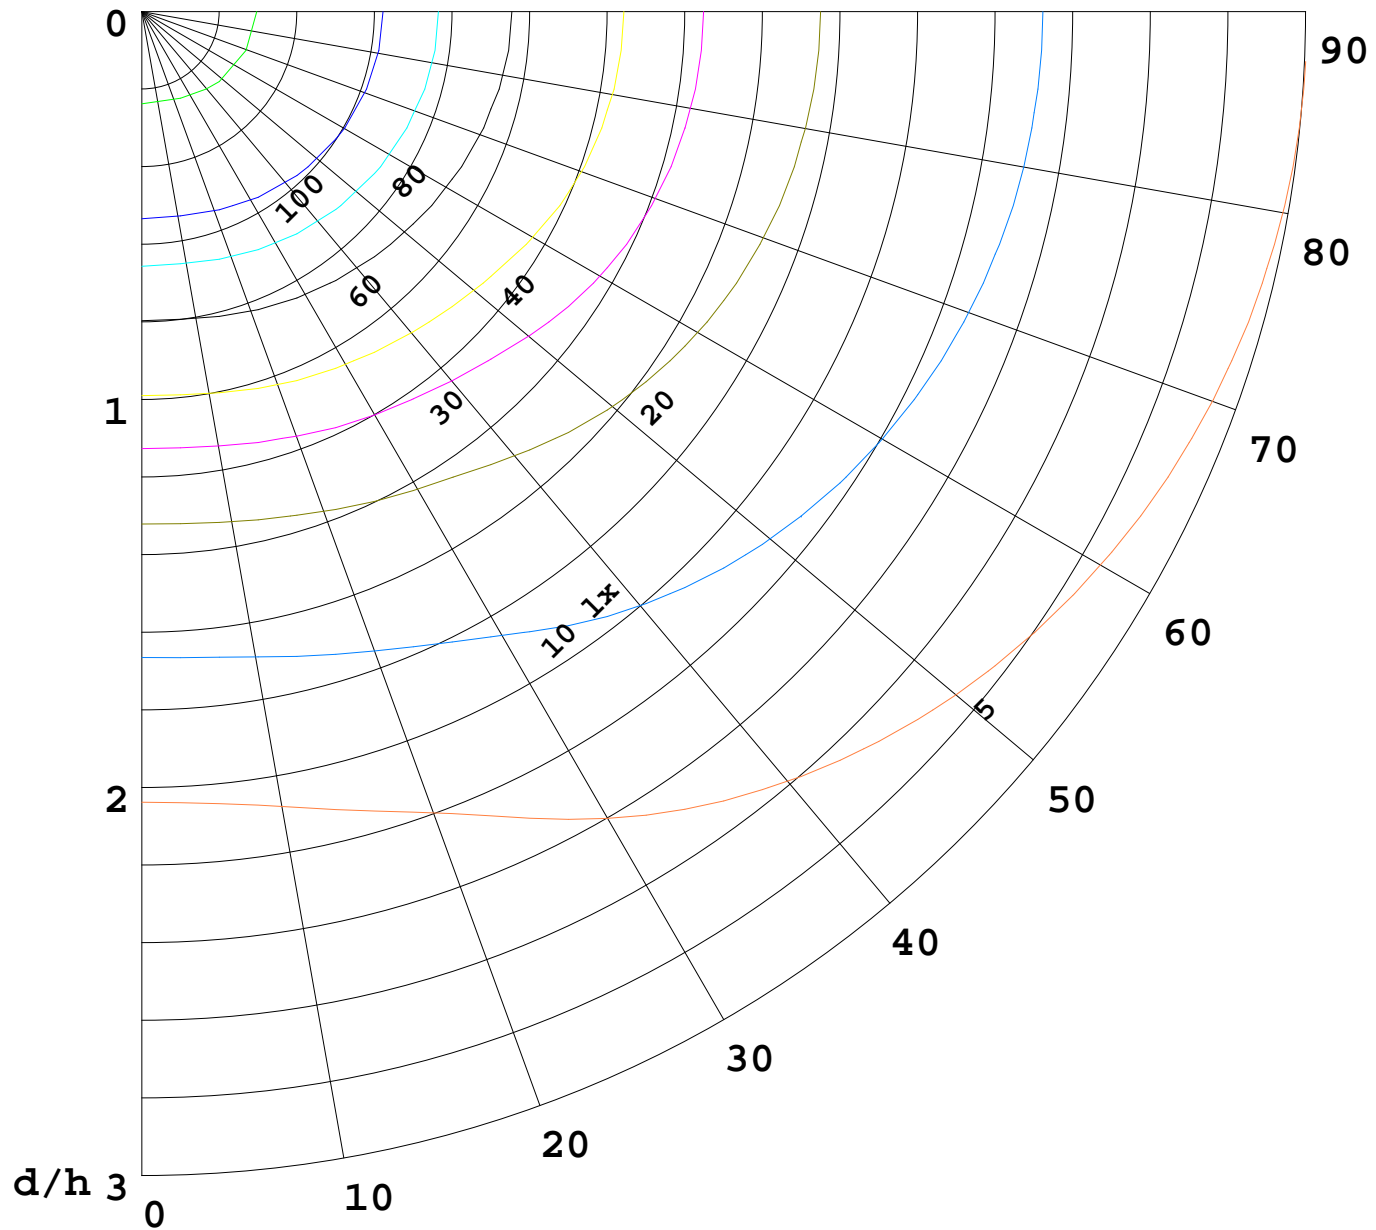



**F** = 5000 lm  
**K** = 0.7  
**Hcc** = 0.0 m  
**Hfc** = 0.0 m  
**Eave** = 100 lx

	<b>Pcc</b>	<b>Pw</b>	<b>Pfc</b>
—————	70	50	30
—————	50	30	20

