
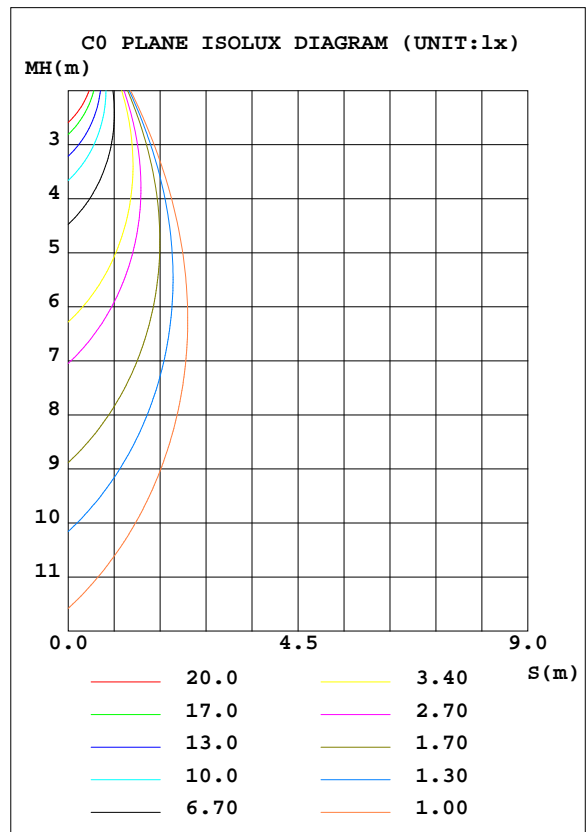


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 30.58 lm/W			
MODEL		I _{max} (cd)	277.2	S/MH(C0/180)	0.51
NOMINAL POWER(W)	26	LOR(%)	100.0	S/MH(C90/270)	1.25
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	790.42	η UP, DN(C0-180)	9.8, 38.1
NOMINAL FLUX(lm)	790.415	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	11.1, 41.0
LAMPS INSIDE	1	η up(%)	20.9	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.6	η down(%)	79.1	CIBSE SHR MAX	1.35

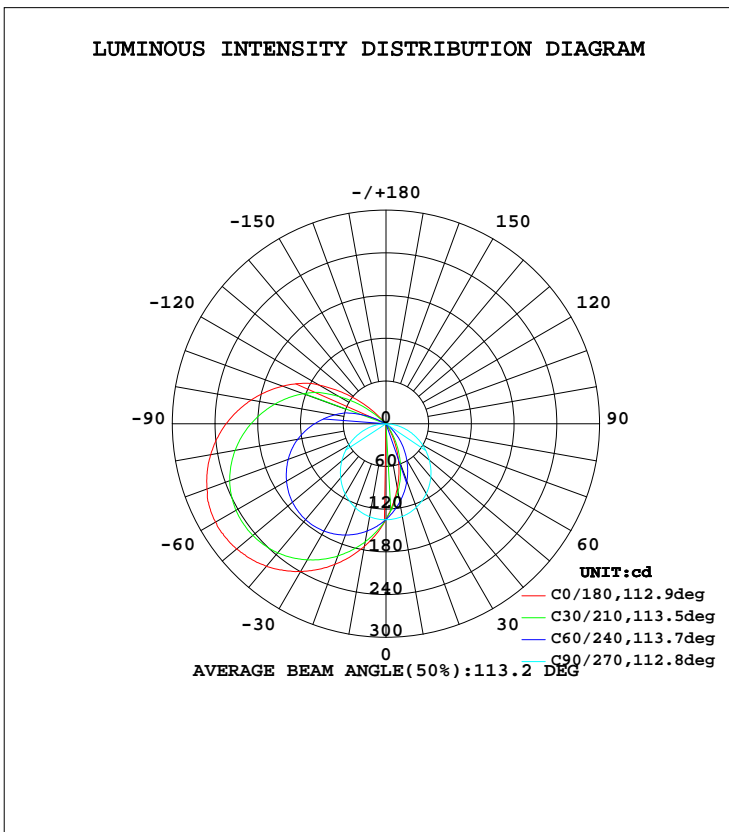


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

ZONAL FLUX DIAGRAM
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	§lum,lamp
5	113.2	119.4	134.2	149.5	155.3	148.7	134.4	120.5	0- 5	3.220	3.220	0.41,0.41
10	91.94	103.6	132.2	162.6	174.7	161.8	132.6	104.6	5- 10	9.570	12.79	1.62,1.62
15	70.65	87.28	129.2	174.4	193.2	173.6	129.7	88.38	10- 15	15.65	28.44	3.6,3.6
20	49.77	70.79	125.0	184.8	210.3	183.9	125.6	71.78	15- 20	21.31	49.76	6.3,6.3
25	29.61	54.25	119.7	193.6	225.7	193.0	120.4	55.24	20- 25	26.40	76.16	9.64,9.64
30	11.08	37.88	113.3	200.9	239.5	200.2	114.3	38.78	25- 30	30.80	107.0	13.5,13.5
35	0.6338	22.22	106.1	206.4	251.5	205.9	107.1	22.94	30- 35	34.49	141.5	17.9,17.9
40	0.4307	7.886	97.92	210.0	261.4	209.6	99.16	8.559	35- 40	37.87	179.3	22.7,22.7
45	0.3409	0.6651	89.05	211.7	268.5	211.7	90.36	0.5297	40- 45	41.04	220.4	27.9,27.9
50	0.4160	0.4615	79.56	211.9	273.9	211.9	81.05	0.3758	45- 50	43.73	264.1	33.4,33.4
55	0.5070	0.4308	69.52	209.9	276.3	210.2	71.07	0.2898	50- 55	45.81	309.9	39.2,39.2
60	0.6019	0.4483	59.19	206.3	276.5	206.8	60.73	0.2988	55- 60	47.18	357.1	45.2,45.2
65	0.7061	0.5163	48.58	201.0	273.7	201.8	50.13	0.3620	60- 65	47.78	404.9	51.2,51.2
70	0.8103	0.5976	38.04	193.8	267.4	194.8	39.50	0.4480	65- 70	47.57	452.5	57.2,57.2
75	0.9006	0.6790	27.58	184.6	259.9	186.0	28.91	0.5250	70- 75	46.56	499.0	63.1,63.1
80	1.013	0.7605	17.28	173.6	249.8	175.3	18.50	0.6110	75- 80	44.78	543.8	68.8,68.8
85	1.055	0.8285	7.232	161.4	238.3	163.1	8.447	0.6833	80- 85	42.26	586.1	74.1,74.1
90	1.113	0.8874	0.7742	147.7	224.5	149.7	0.5694	0.7514	85- 90	39.10	625.1	79.1,79.1
95	1.168	0.9417	0.6881	133.2	209.1	135.2	0.4164	0.8058	90- 95	35.44	660.6	83.6,83.6
100	1.218	0.9778	0.6204	118.0	192.3	120.1	0.3573	0.8735	95-100	31.43	692.0	87.6,87.6
105	1.254	1.021	0.5343	102.1	174.2	104.2	0.3547	0.9143	100-105	27.14	719.2	91.9,91.9
110	1.308	1.039	0.4710	85.67	154.5	87.75	0.3565	0.9452	105-110	22.65	741.8	93.9,93.9
115	1.308	1.040	0.4380	62.08	133.9	64.52	0.3831	0.9612	110-115	18.05	759.9	96.1,96.1
120	1.277	1.039	0.4434	39.43	109.2	41.53	0.4394	0.9927	115-120	13.38	773.3	97.8,97.8
125	1.250	1.035	0.4844	13.63	79.51	16.62	0.4890	1.014	120-125	8.800	782.1	98.9,98.9
130	1.226	1.031	0.5205	0.9340	50.83	0.4445	0.5296	1.045	125-130	4.981	787.0	99.6,99.6
135	1.201	1.026	0.5740	0.6504	19.16	0.6648	0.5523	1.141	130-135	1.962	789.0	99.8,99.8
140	1.164	1.012	0.5930	0.5928	0.3098	0.5343	0.5840	1.018	135-140	0.3341	789.3	99.9,99.9
145	1.118	1.001	0.6475	0.4819	0.3124	0.3531	0.6219	1.010	140-145	0.2424	789.6	99.9,99.9
150	1.077	0.9681	0.7242	0.4891	0.3538	0.3470	0.6565	1.005	145-150	0.2107	789.8	99.9,99.9
155	1.037	0.9588	0.7694	0.5390	0.3248	0.3712	0.7198	1.005	150-155	0.1819	790.0	99.9,99.9
160	0.9871	0.9512	0.8056	0.5977	0.3532	0.4330	0.7605	1.002	155-160	0.1547	790.1	100,100
165	0.9325	0.9279	0.8057	0.6700	0.4166	0.5024	0.7862	0.9959	160-165	0.1241	790.2	100,100
170	0.8693	0.8646	0.8057	0.7425	0.4849	0.5838	0.8108	0.9682	165-170	0.0913	790.3	100,100
175	0.7834	0.8102	0.8058	0.8104	0.5886	0.6609	0.8132	0.9326	170-175	0.0564	790.4	100,100
180	0.6971	0.7650	0.8103	0.8646	0.6609	0.7379	0.8148	0.8691	175-180	0.0191	790.4	100,100
DEG	LUMINOUS INTENSITY:cd MAX (Ii - Iavg)/Iavg (0-135) = 230.8 %										UNIT:lm	

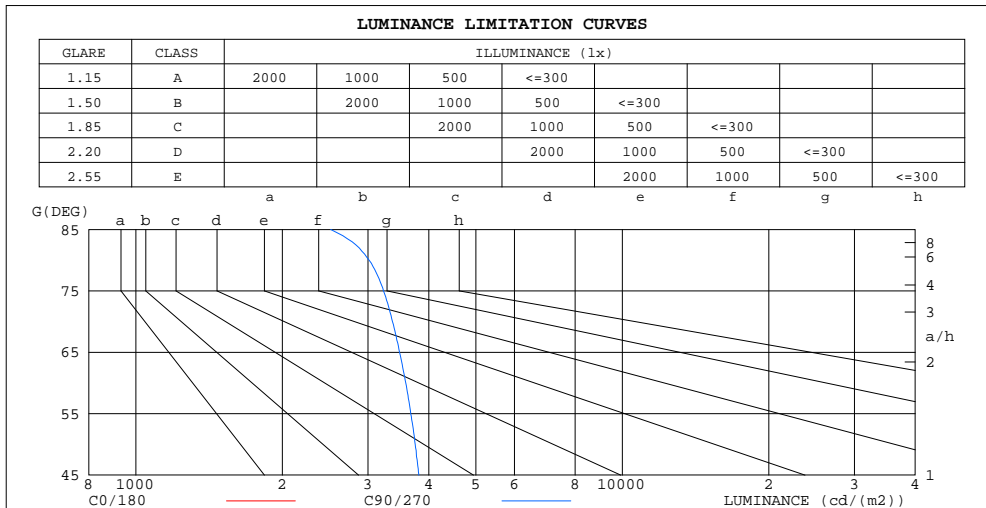

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	367	2514
80	177	3016
75	105	3229
70	72	3370
65	51	3484
60	36	3587
55	27	3673
50	20	3751
45	15	3816


C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature:25DEG
Operators:luominxian
Test Date:2018-04-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
Humidity:70%
Test Distance:8.425m [K=1.0000]
Remarks: 壁灯

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.14	1.14	1.14	1.09	1.09	1.09	.99	.99	.99	.91	.91	.91	.83	.83	.83	.79
1.0	.93	.87	.81	.88	.83	.78	.80	.76	.72	.72	.69	.66	.65	.63	.60	.56
2.0	.78	.70	.63	.75	.67	.60	.67	.61	.56	.61	.56	.51	.55	.51	.47	.43
3.0	.67	.58	.50	.64	.55	.48	.58	.51	.45	.52	.46	.41	.47	.42	.38	.35
4.0	.59	.49	.41	.56	.47	.40	.51	.43	.37	.46	.39	.34	.41	.36	.32	.28
5.0	.52	.42	.35	.50	.40	.34	.45	.37	.31	.41	.34	.29	.37	.31	.27	.24
6.0	.46	.37	.30	.44	.35	.29	.40	.33	.27	.37	.30	.25	.33	.27	.23	.20
7.0	.42	.32	.26	.40	.31	.25	.36	.29	.23	.33	.27	.22	.30	.24	.20	.18
8.0	.38	.29	.23	.36	.28	.22	.33	.26	.21	.30	.24	.19	.28	.22	.18	.16
9.0	.35	.26	.20	.33	.25	.20	.30	.23	.18	.28	.22	.17	.25	.20	.16	.14
10.0	.32	.24	.18	.30	.23	.18	.28	.21	.16	.26	.20	.15	.24	.18	.14	.12

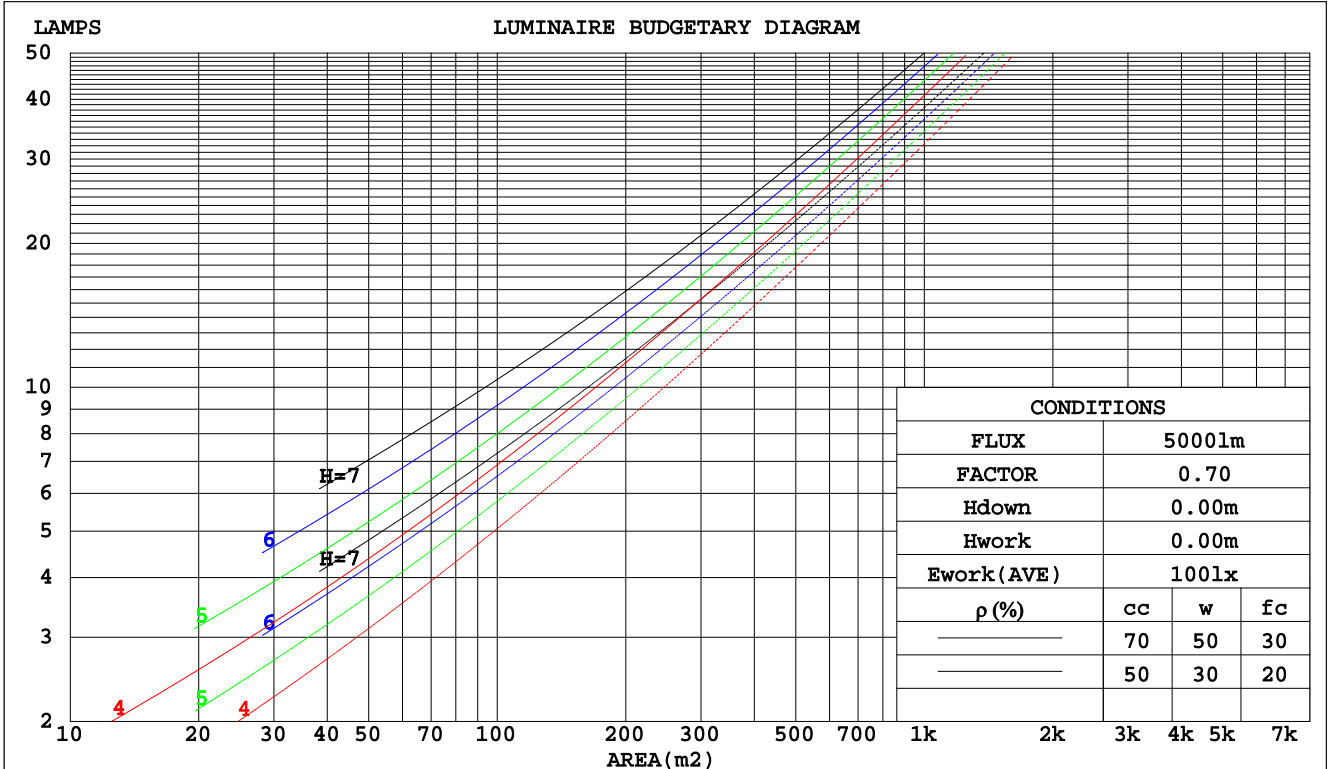

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

WEC AND CCEC

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.428	.244	.077	.415	.237	.075	.389	.223	.071	.365	.211	.068	.344	.199	.064	
2.0	.360	.197	.061	.348	.191	.059	.324	.180	.056	.303	.170	.053	.283	.160	.050	
3.0	.314	.167	.050	.303	.162	.049	.282	.153	.046	.263	.144	.044	.244	.135	.042	
4.0	.280	.145	.043	.270	.141	.042	.250	.133	.040	.233	.125	.038	.216	.117	.036	
5.0	.252	.129	.037	.243	.125	.036	.226	.117	.035	.209	.110	.033	.194	.104	.031	
6.0	.230	.115	.033	.221	.112	.032	.205	.105	.031	.190	.099	.029	.177	.093	.028	
7.0	.211	.104	.030	.203	.101	.029	.188	.095	.027	.175	.090	.026	.162	.084	.025	
8.0	.195	.095	.027	.188	.092	.026	.174	.087	.025	.162	.082	.024	.150	.077	.022	
9.0	.181	.087	.024	.174	.085	.024	.162	.080	.023	.150	.075	.022	.139	.071	.020	
10.0	.169	.081	.022	.163	.079	.022	.151	.074	.021	.141	.070	.020	.130	.066	.019	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.350	.350	.350	.299	.299	.299	.204	.204	.204	.117	.117	.117	.037	.037	.037	
1.0	.349	.316	.286	.299	.271	.246	.204	.186	.170	.118	.108	.099	.038	.035	.032	
2.0	.343	.293	.251	.294	.252	.217	.201	.175	.152	.116	.102	.089	.037	.033	.029	
3.0	.336	.277	.231	.288	.239	.200	.198	.166	.140	.114	.097	.083	.037	.031	.027	
4.0	.328	.265	.217	.281	.229	.189	.193	.160	.133	.112	.093	.079	.036	.030	.026	
5.0	.320	.255	.208	.275	.221	.181	.189	.154	.128	.110	.091	.076	.035	.030	.025	
6.0	.312	.247	.201	.268	.214	.175	.185	.150	.124	.107	.088	.074	.035	.029	.024	
7.0	.305	.241	.196	.262	.209	.171	.181	.146	.121	.105	.086	.072	.034	.028	.024	
8.0	.298	.235	.193	.256	.204	.168	.177	.143	.119	.103	.085	.071	.033	.028	.024	
9.0	.291	.231	.190	.251	.200	.166	.174	.141	.118	.101	.083	.070	.033	.027	.023	
10.0	.285	.227	.187	.246	.197	.164	.171	.138	.116	.099	.082	.069	.032	.027	.023	

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

Uncorrected UGR Table

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm										
NAME: 壁灯					TYPE:			WEIGHT:		
DIM.:					SPEC.:			SERIAL No.:201800411-01		
MFR.: Target					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-15.3	-13.9	-14.7	-13.3	-12.7	9.2	10.6	9.7	11.1	11.8
3H	-12.6	-11.3	-12.1	-10.8	-10.1	10.6	11.9	11.2	12.5	13.2
4H	-10.6	-9.3	-10.0	-8.7	-8.0	11.2	12.4	11.8	13.0	13.7
6H	-8.1	-6.9	-7.5	-6.3	-5.6	11.6	12.8	12.2	13.4	14.1
8H	-6.7	-5.5	-6.1	-4.9	-4.2	11.8	12.9	12.4	13.5	14.3
12H	-5.1	-4.0	-4.5	-3.4	-2.6	11.9	13.0	12.5	13.6	14.4
4H 2H	-14.5	-13.3	-13.9	-12.7	-12.0	8.7	10.0	9.3	10.6	11.3
3H	-11.7	-10.6	-11.0	-9.9	-9.2	10.1	11.2	10.8	11.9	12.6
4H	-9.4	-8.4	-8.7	-7.7	-6.9	10.7	11.7	11.4	12.4	13.2
6H	-6.7	-5.8	-6.0	-5.1	-4.3	11.2	12.1	11.9	12.8	13.6
8H	-5.2	-4.3	-4.5	-3.6	-2.8	11.3	12.2	12.0	12.9	13.7
12H	-3.4	-2.7	-2.7	-1.9	-1.1	11.5	12.3	12.2	13.0	13.8
8H 4H	-8.9	-8.1	-8.2	-7.4	-6.5	10.5	11.4	11.2	12.1	12.9
6H	-5.8	-5.1	-5.1	-4.4	-3.5	11.0	11.7	11.7	12.4	13.3
8H	-4.1	-3.4	-3.3	-2.7	-1.8	11.1	11.8	11.9	12.5	13.4
12H	-2.1	-1.5	-1.3	-0.7	0.2	11.3	11.8	12.0	12.6	13.5
12H 4H	-8.8	-8.0	-8.1	-7.3	-6.5	10.4	11.2	11.1	11.9	12.8
6H	-5.6	-5.0	-4.9	-4.2	-3.3	10.9	11.5	11.6	12.3	13.2
8H	-3.7	-3.1	-3.0	-2.4	-1.5	11.1	11.6	11.8	12.4	13.3
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 2.8 / - 5.5				
1.5H	+ 0.3 / - 0.3					+ 4.2 / -15.8				
2.0H	+ 0.3 / - 0.5					+ 5.2 / -18.2				

CIE Pub.117 Corrected 790.4 lm Total Lamp Luminous Flux.(8log(F/F0) = -0.8)

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

UTILIZATION FACTORS TABLE

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	44	31	24	43	31	23	41	30	23	16
0.80	53	39	31	51	38	30	49	37	30	22
1.00	60	46	37	58	45	37	55	46	36	27
1.25	67	53	44	65	52	43	60	50	42	32
1.50	72	59	50	70	57	49	65	54	47	36
2.00	80	68	58	77	65	57	71	61	54	42
2.50	85	73	64	81	71	63	75	66	59	46
3.00	89	78	70	85	75	68	78	70	64	50
4.00	94	85	77	90	81	75	82	75	70	54
5.00	97	89	82	93	86	79	85	79	74	58
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

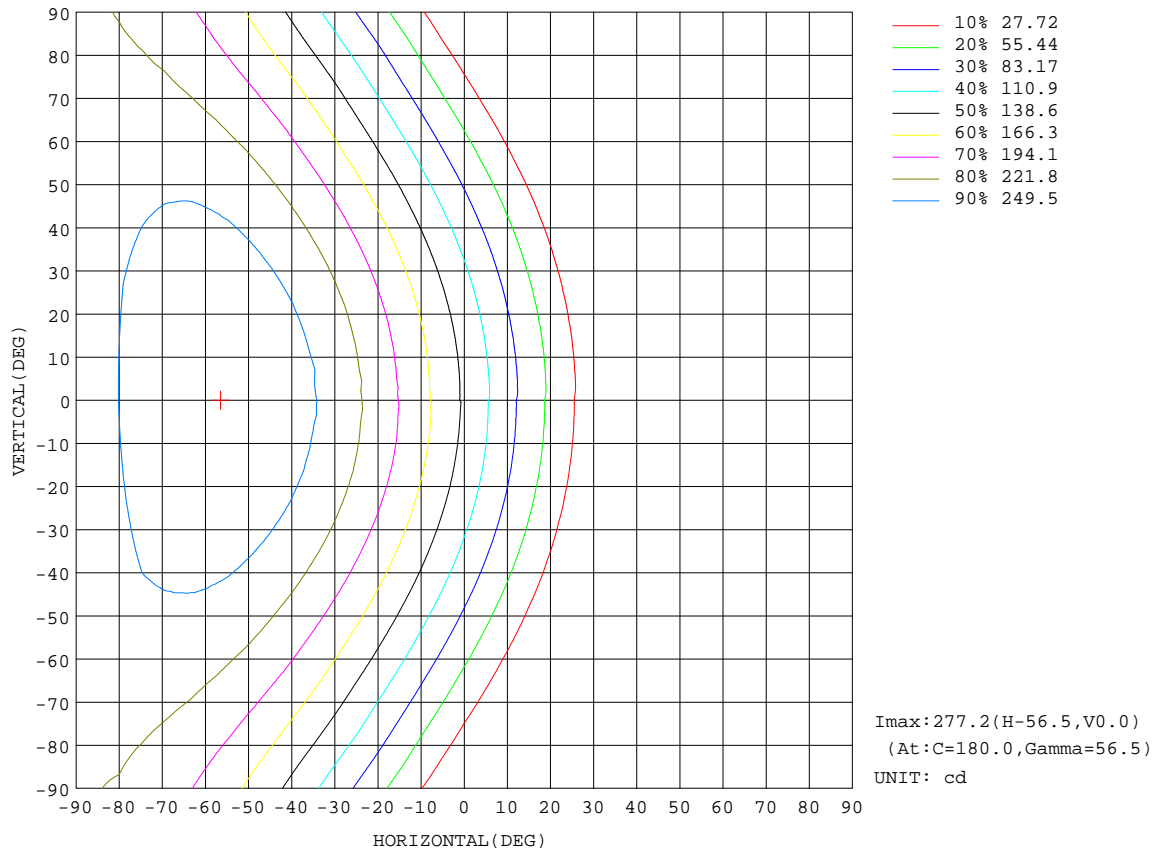


C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

AAI Figure

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

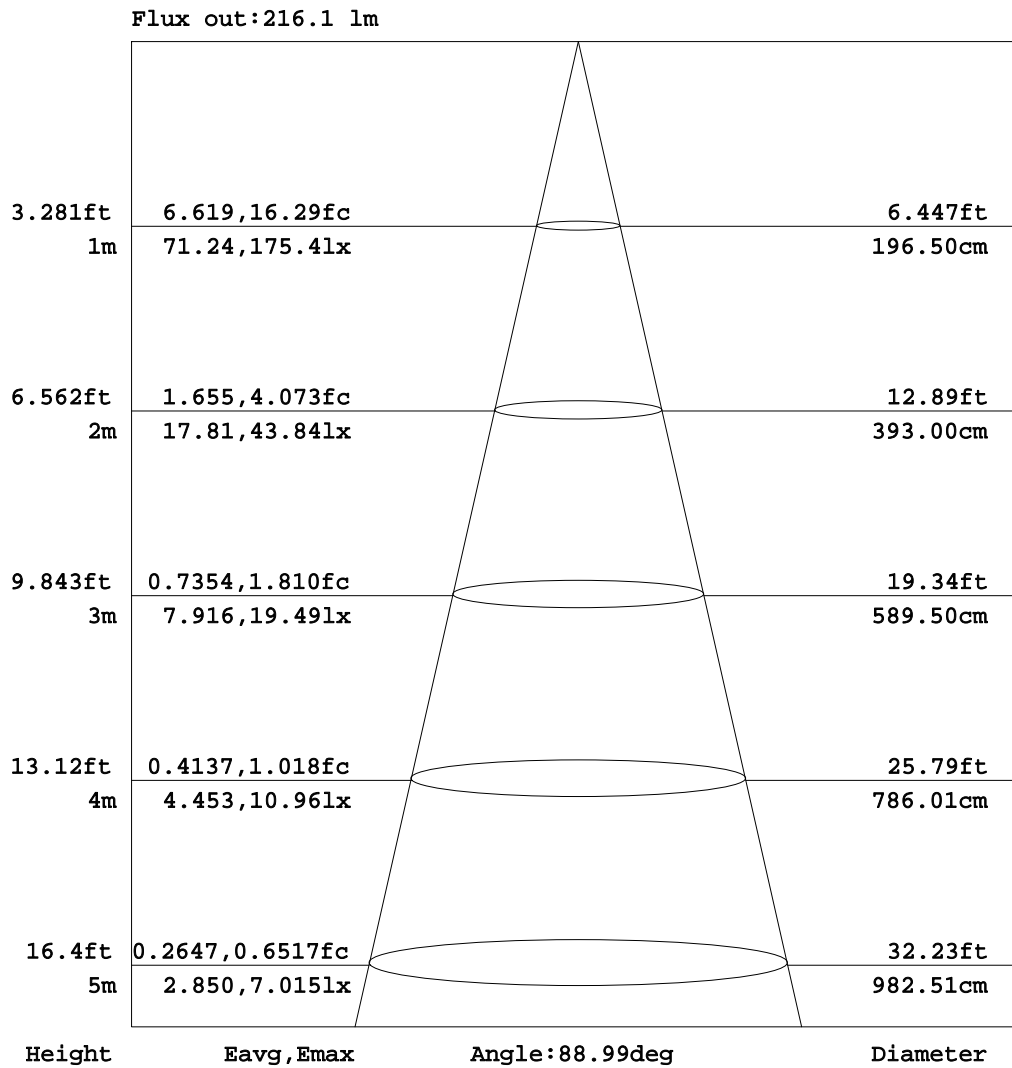


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

ISOLUX DIAGRAM


Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

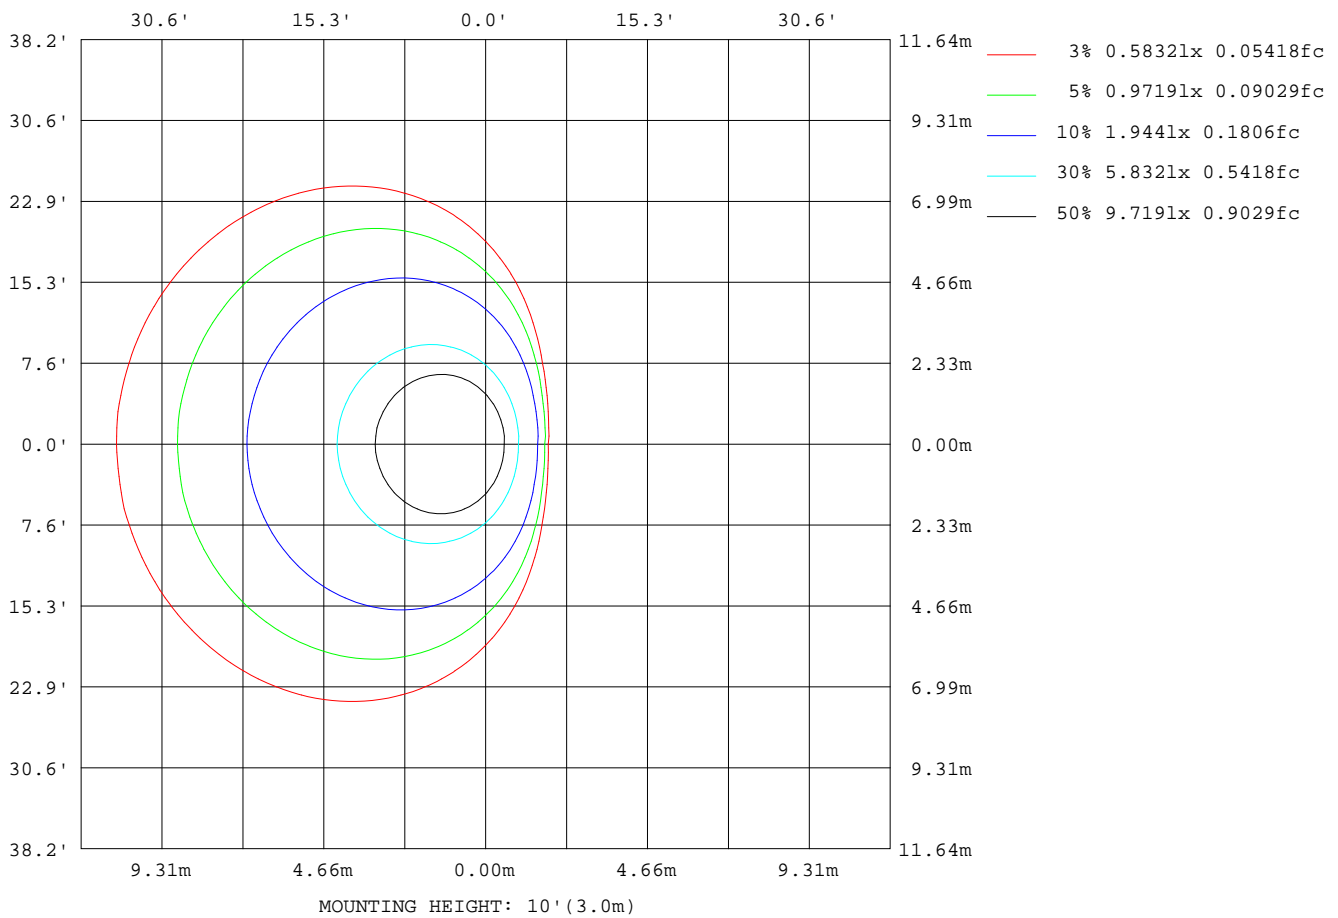

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

Planar Illuminance Curve

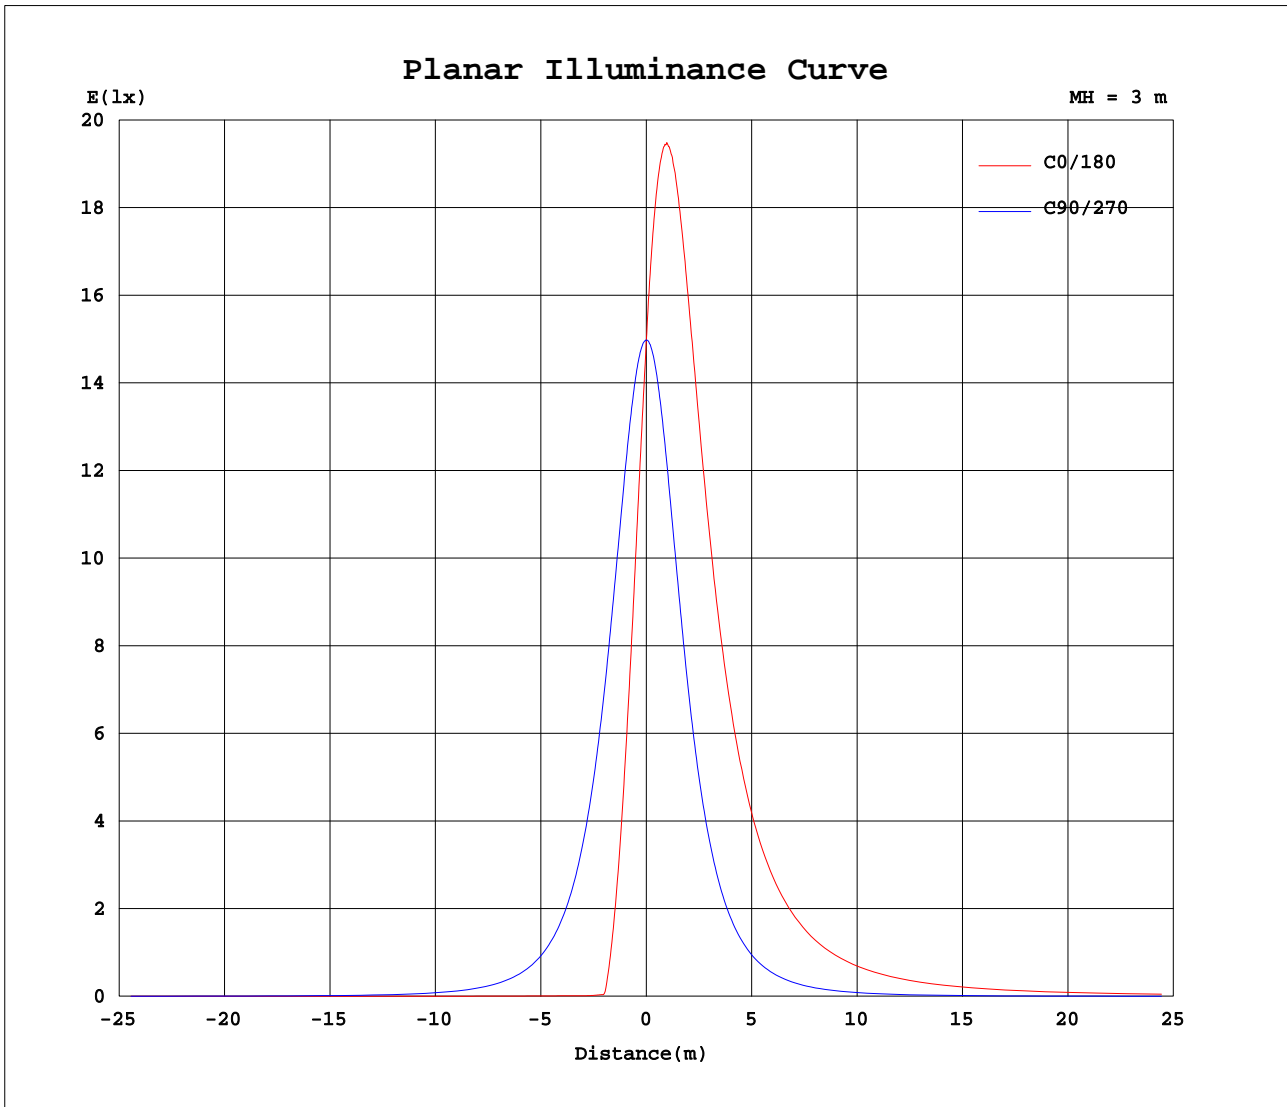

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: luominxian
 Test Date: 2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity: 70%
 Test Distance: 8.425m [K=1.0000]
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	134	134	134	134	134	134	134	134	134	134	134	135	134	135	135	135	135	135	135
5	113	114	114	114	114	115	116	117	118	119	120	122	124	125	127	129	130	132	134
10	91.9	92.4	92.4	93.4	94.2	95.8	97.1	99.2	101	104	106	109	112	115	118	122	125	129	132
15	70.6	71.1	71.5	72.8	74.0	76.1	78.1	81.0	83.8	87.3	90.7	95.0	99.1	104	108	113	119	124	129
20	49.8	50.3	50.8	52.4	53.9	56.6	59.2	62.8	66.3	70.8	75.3	80.6	85.9	91.9	97.9	105	111	118	125
25	29.6	30.2	30.8	32.6	34.5	37.5	40.6	44.7	49.0	54.3	59.6	65.8	72.3	79.4	86.8	94.7	103	111	120
30	11.1	11.6	12.4	14.2	16.2	19.4	22.7	27.3	32.0	37.9	44.0	51.2	58.5	66.7	75.1	84.2	93.5	103	113
35	0.63	0.61	0.67	0.66	1.23	3.62	6.72	11.1	16.0	22.2	28.8	36.5	44.6	53.7	63.0	73.2	83.7	94.8	106
40	0.43	0.41	0.47	0.45	0.54	0.56	0.67	0.67	2.12	7.89	14.4	22.4	30.9	40.7	50.8	61.9	73.3	85.5	97.9
45	0.34	0.38	0.37	0.38	0.39	0.41	0.45	0.48	0.61	0.67	1.92	9.28	17.8	27.9	38.5	50.3	62.5	75.6	89.1
50	0.42	0.46	0.41	0.43	0.39	0.42	0.40	0.40	0.42	0.46	0.62	0.71	5.97	15.6	26.5	38.7	51.4	65.3	79.6
55	0.51	0.55	0.49	0.53	0.47	0.50	0.43	0.44	0.42	0.43	0.44	0.50	0.71	4.69	14.9	27.3	40.3	54.7	69.5
60	0.60	0.65	0.60	0.63	0.57	0.59	0.51	0.53	0.43	0.45	0.43	0.44	0.51	0.65	4.57	16.2	29.4	43.9	59.2
65	0.71	0.75	0.70	0.73	0.66	0.69	0.61	0.62	0.54	0.52	0.44	0.45	0.46	0.48	0.71	6.00	18.7	33.2	48.6
70	0.81	0.85	0.79	0.83	0.77	0.78	0.72	0.71	0.61	0.60	0.50	0.48	0.46	0.47	0.52	0.70	8.53	22.8	38.0
75	0.90	0.94	0.89	0.91	0.85	0.87	0.79	0.79	0.71	0.68	0.58	0.54	0.46	0.47	0.50	0.52	0.86	12.6	27.6
80	1.01	1.01	0.97	1.00	0.93	0.96	0.87	0.87	0.78	0.76	0.65	0.62	0.50	0.49	0.49	0.52	0.62	3.21	17.3
85	1.05	1.08	1.05	1.06	1.00	1.02	0.94	0.94	0.84	0.83	0.72	0.69	0.58	0.53	0.48	0.50	0.58	0.66	7.23
90	1.11	1.14	1.12	1.14	1.08	1.08	1.01	0.99	0.91	0.89	0.78	0.75	0.64	0.59	0.50	0.50	0.56	0.60	0.77
95	1.17	1.20	1.18	1.19	1.13	1.14	1.05	1.05	0.95	0.94	0.84	0.81	0.69	0.65	0.52	0.50	0.53	0.57	0.69
100	1.22	1.23	1.23	1.23	1.17	1.17	1.10	1.09	1.01	0.98	0.89	0.85	0.75	0.72	0.59	0.55	0.50	0.52	0.62
105	1.25	1.27	1.25	1.25	1.22	1.21	1.15	1.13	1.03	1.02	0.93	0.91	0.80	0.77	0.65	0.61	0.50	0.48	0.53
110	1.31	1.27	1.27	1.26	1.23	1.22	1.16	1.14	1.05	1.04	0.96	0.93	0.85	0.81	0.70	0.65	0.50	0.48	0.47
115	1.31	1.25	1.27	1.25	1.23	1.21	1.16	1.14	1.08	1.04	0.97	0.94	0.86	0.81	0.72	0.66	0.54	0.52	0.44
120	1.28	1.23	1.26	1.23	1.24	1.18	1.16	1.15	1.10	1.04	0.97	0.95	0.87	0.82	0.73	0.69	0.58	0.56	0.44
125	1.25	1.20	1.25	1.22	1.22	1.17	1.16	1.10	1.09	1.03	0.98	0.95	0.87	0.85	0.75	0.73	0.62	0.59	0.48
130	1.23	1.16	1.22	1.18	1.19	1.16	1.15	1.09	1.09	1.03	0.98	0.95	0.88	0.87	0.77	0.75	0.64	0.62	0.52
135	1.20	1.14	1.19	1.16	1.17	1.14	1.14	1.09	1.08	1.03	0.99	0.95	0.89	0.88	0.80	0.77	0.66	0.65	0.57
140	1.16	1.10	1.15	1.12	1.14	1.10	1.12	1.07	1.08	1.01	0.99	0.95	0.90	0.89	0.80	0.80	0.70	0.68	0.59
145	1.12	1.08	1.12	1.09	1.11	1.09	1.10	1.04	1.05	1.00	0.99	0.95	0.90	0.89	0.81	0.81	0.74	0.72	0.65
150	1.08	1.03	1.07	1.04	1.08	1.04	1.07	1.01	1.03	0.97	0.98	0.95	0.90	0.90	0.82	0.84	0.76	0.76	0.72
155	1.04	1.00	1.05	1.01	1.05	1.01	1.05	1.00	1.01	0.96	0.97	0.94	0.90	0.91	0.88	0.87	0.84	0.83	0.77
160	0.99	0.95	1.00	0.96	1.01	0.96	1.01	0.96	0.99	0.95	0.97	0.94	0.94	0.90	0.89	0.87	0.85	0.83	0.81
165	0.93	0.90	0.94	0.90	0.95	0.93	0.95	0.93	0.96	0.93	0.95	0.90	0.92	0.87	0.89	0.86	0.85	0.83	0.81
170	0.87	0.83	0.87	0.85	0.88	0.87	0.92	0.88	0.91	0.86	0.90	0.86	0.90	0.86	0.88	0.84	0.85	0.83	0.81
175	0.78	0.74	0.79	0.77	0.83	0.80	0.85	0.80	0.85	0.81	0.85	0.81	0.85	0.82	0.86	0.83	0.85	0.83	0.81
180	0.70	0.70	0.72	0.72	0.74	0.74	0.76	0.75	0.77	0.77	0.78	0.78	0.80	0.81	0.82	0.81	0.83	0.83	0.81

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

C(DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	135	135	135	135	135	135	135	136	135	136	136	136	136	136	135	136	135	134	134
5	136	138	140	141	143	145	147	148	150	151	152	153	154	155	155	155	156	155	155
10	136	140	143	147	150	154	157	160	163	165	167	170	171	173	173	174	175	175	174
15	135	140	145	151	156	161	165	170	174	178	182	185	187	189	191	192	193	193	192
20	132	139	146	153	160	167	173	179	185	190	195	199	202	205	207	209	210	210	209
25	128	137	146	154	163	171	179	187	194	200	206	211	215	219	222	224	226	226	225
30	124	134	144	154	164	174	183	192	201	209	216	222	227	231	234	237	239	240	238
35	118	129	141	153	164	176	186	197	206	215	223	230	236	242	245	248	251	251	250
40	111	124	137	150	163	175	188	199	210	220	229	237	244	250	254	257	260	261	259
45	103	117	132	146	160	174	187	200	212	223	233	242	249	256	260	264	267	269	266
50	94.6	110	125	141	156	171	185	199	212	224	235	244	252	259	265	269	272	274	273
55	85.4	101	118	134	151	166	182	196	210	223	234	244	253	261	267	272	275	276	275
60	75.6	92.3	110	127	144	161	177	192	206	220	232	243	252	260	266	271	274	276	275
65	65.3	82.5	100	118	136	153	170	186	201	215	227	238	248	256	263	269	272	274	273
70	54.8	72.3	90.5	109	127	145	162	178	194	208	221	232	242	251	258	264	265	267	268
75	44.1	61.5	80.0	98.5	117	135	153	169	185	199	212	224	234	243	250	256	258	260	260
80	33.5	50.6	69.0	87.6	106	124	141	158	174	188	201	213	224	233	240	246	248	250	250
85	23.0	39.8	57.7	75.6	93.8	111	129	145	161	176	189	201	212	221	228	234	236	238	238
90	12.3	28.4	45.3	62.6	80.4	97.9	115	132	148	162	176	188	198	207	214	220	222	225	224
95	0.78	17.1	33.5	50.0	67.2	84.2	101	117	133	147	161	173	183	192	199	205	207	209	209
100	0.66	0.92	19.3	37.7	54.2	70.4	86.9	103	118	132	145	157	167	175	182	188	190	192	192
105	0.56	0.68	0.82	20.2	37.8	56.2	72.3	87.3	102	116	128	139	149	157	164	169	172	174	174
110	0.47	0.58	0.60	0.76	19.7	36.0	52.8	69.4	85.7	98.5	111	121	131	138	145	150	152	155	154
115	0.42	0.50	0.50	0.61	0.66	16.3	32.5	47.1	62.1	75.8	89.5	101	111	119	125	129	132	134	133
120	0.41	0.43	0.43	0.51	0.53	0.67	7.44	25.4	39.4	51.7	63.8	74.2	84.0	91.8	98.6	103	106	109	108
125	0.46	0.40	0.41	0.45	0.45	0.56	0.60	0.73	13.6	27.5	39.0	48.4	57.3	64.2	70.3	74.1	77.1	79.5	78.4
130	0.50	0.42	0.43	0.41	0.45	0.54	0.60	0.65	0.93	0.76	3.91	20.7	30.1	36.5	42.3	45.7	48.5	50.8	49.8
135	0.55	0.46	0.49	0.41	0.44	0.53	0.64	0.67	0.65	0.68	0.68	0.70	0.79	0.72	1.91	8.34	14.5	19.2	17.5
140	0.58	0.51	0.55	0.50	0.52	0.53	0.53	0.60	0.59	0.62	0.59	0.63	0.62	0.69	0.66	0.66	0.64	0.31	0.33
145	0.64	0.58	0.63	0.57	0.59	0.53	0.52	0.49	0.48	0.52	0.51	0.59	0.57	0.59	0.56	0.55	0.52	0.31	0.33
150	0.71	0.65	0.68	0.60	0.61	0.53	0.55	0.49	0.49	0.47	0.47	0.47	0.47	0.49	0.49	0.49	0.45	0.35	0.35
155	0.78	0.71	0.71	0.64	0.64	0.57	0.59	0.52	0.54	0.47	0.50	0.48	0.48	0.47	0.46	0.44	0.44	0.32	0.32
160	0.80	0.73	0.74	0.67	0.69	0.63	0.65	0.58	0.60	0.53	0.56	0.52	0.53	0.48	0.50	0.44	0.48	0.35	0.33
165	0.82	0.76	0.77	0.72	0.74	0.68	0.71	0.65	0.67	0.61	0.63	0.57	0.61	0.55	0.58	0.52	0.54	0.42	0.38
170	0.83	0.79	0.81	0.75	0.79	0.73	0.77	0.72	0.74	0.68	0.72	0.66	0.69	0.64	0.67	0.62	0.64	0.48	0.48
175	0.83	0.81	0.84	0.80	0.83	0.79	0.83	0.80	0.81	0.76	0.79	0.74	0.77	0.72	0.76	0.72	0.75	0.59	0.58
180	0.83	0.82	0.85	0.82	0.86	0.85	0.87	0.87	0.86	0.86	0.86	0.86	0.86	0.83	0.84	0.81	0.81	0.66	0.66

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--3

UNIT: cd

C(DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	134	134	134	134	134	134	134	134	134	135	134	135	135	135	135	135	135	135	135
5	155	154	153	153	152	151	150	149	147	146	144	143	141	139	138	136	134	133	131
10	174	173	171	170	168	166	164	162	159	156	153	150	146	143	140	136	133	129	126
15	192	190	188	186	183	181	177	174	169	165	160	156	151	145	140	135	130	124	119
20	209	207	204	201	198	194	189	184	178	173	166	160	153	147	140	133	126	119	112
25	224	221	218	215	210	205	199	193	186	179	171	163	155	146	138	129	120	112	104
30	238	234	231	226	221	215	208	200	192	183	174	164	155	145	135	124	114	104	94.7
35	249	245	241	236	230	223	214	206	196	186	176	165	153	142	130	119	107	95.8	84.9
40	259	254	249	244	237	229	220	210	199	188	176	163	151	138	125	112	99.2	86.6	74.6
45	266	261	255	249	241	233	223	212	200	187	174	161	147	133	119	104	90.4	76.9	63.9
50	270	265	259	253	244	234	224	212	199	186	171	157	142	126	111	95.7	81.0	66.5	52.8
55	273	267	261	254	244	234	223	210	197	182	167	151	135	119	103	86.6	71.1	55.9	41.6
60	272	267	261	253	243	232	220	207	192	177	161	145	128	111	93.9	77.0	60.7	45.1	30.6
65	269	264	258	249	239	228	216	202	187	171	154	137	120	102	84.2	66.7	50.1	34.3	19.9
70	264	258	252	244	234	222	209	195	180	163	146	128	110	92.0	74.0	56.2	39.5	23.7	9.64
75	256	251	244	236	225	213	201	186	171	154	137	118	100	81.6	63.4	45.5	28.9	13.5	1.43
80	246	241	234	225	215	203	190	175	160	143	126	108	89.6	70.8	52.5	34.8	18.5	4.14	0.39
85	234	229	222	214	203	191	178	163	148	131	114	95.7	77.8	59.6	41.6	24.1	8.45	0.49	0.39
90	221	215	209	200	190	178	164	150	134	117	100	82.6	65.0	47.2	30.0	13.4	0.57	0.45	0.39
95	205	200	194	185	175	163	150	135	120	103	86.7	69.4	52.3	35.1	18.6	1.85	0.42	0.40	0.39
100	189	184	177	169	159	147	134	120	105	89.2	73.0	56.3	39.8	21.2	3.61	0.45	0.36	0.38	0.41
105	171	166	159	151	142	130	118	104	89.8	74.5	59.1	40.2	22.5	3.48	0.38	0.38	0.35	0.38	0.43
110	151	146	141	133	124	113	101	87.7	72.8	55.4	38.8	21.7	0.88	0.40	0.32	0.34	0.36	0.38	0.49
115	131	126	121	113	104	92.1	78.9	64.5	50.1	34.6	19.0	0.44	0.33	0.33	0.32	0.34	0.38	0.41	0.53
120	105	100	94.4	86.1	77.0	66.0	54.5	41.5	28.1	11.6	0.36	0.34	0.32	0.32	0.33	0.34	0.44	0.46	0.58
125	76.4	71.9	66.6	59.2	51.0	41.0	30.2	16.6	0.40	0.39	0.35	0.33	0.32	0.32	0.37	0.38	0.49	0.52	0.63
130	47.9	43.8	39.0	31.9	23.8	9.52	2.75	0.44	0.44	0.41	0.37	0.34	0.34	0.33	0.42	0.43	0.53	0.55	0.66
135	14.6	5.41	0.53	0.51	0.60	0.65	0.70	0.66	0.71	0.70	0.63	0.52	0.55	0.53	0.53	0.46	0.55	0.58	0.68
140	0.35	0.36	0.36	0.45	0.43	0.48	0.47	0.53	0.44	0.43	0.40	0.42	0.42	0.45	0.49	0.50	0.58	0.60	0.70
145	0.33	0.34	0.36	0.36	0.37	0.40	0.36	0.35	0.35	0.37	0.40	0.41	0.47	0.46	0.53	0.53	0.62	0.65	0.72
150	0.33	0.34	0.32	0.33	0.33	0.33	0.35	0.35	0.38	0.37	0.44	0.43	0.51	0.51	0.59	0.57	0.66	0.66	0.75
155	0.32	0.32	0.33	0.33	0.35	0.33	0.39	0.37	0.44	0.43	0.50	0.50	0.56	0.57	0.64	0.64	0.72	0.71	0.80
160	0.36	0.33	0.39	0.37	0.42	0.38	0.45	0.43	0.51	0.50	0.56	0.55	0.63	0.61	0.69	0.68	0.76	0.75	0.83
165	0.43	0.39	0.45	0.43	0.48	0.45	0.52	0.50	0.57	0.54	0.61	0.60	0.67	0.66	0.73	0.73	0.79	0.79	0.83
170	0.53	0.50	0.55	0.52	0.57	0.54	0.61	0.58	0.64	0.62	0.68	0.66	0.73	0.72	0.77	0.76	0.81	0.80	0.83
175	0.63	0.59	0.65	0.62	0.67	0.65	0.68	0.66	0.72	0.69	0.75	0.73	0.77	0.75	0.80	0.79	0.81	0.81	0.83
180	0.72	0.70	0.73	0.72	0.73	0.72	0.73	0.74	0.75	0.76	0.79	0.80	0.81	0.80	0.81	0.81	0.81	0.82	0.83

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2800A P:25.84W PF:0.7652 Lamp Flux:790.415x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-01
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--4

UNIT: cd

C(DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	135	135	135	135	135	136	135	136	136	136	136	136	135	136	135				
5	129	128	126	125	123	122	120	119	118	117	117	116	115	115	114				
10	122	119	116	113	110	107	105	103	100	98.8	97.0	95.9	94.5	94.0	93.1				
15	114	109	105	100	95.9	92.2	88.4	85.3	82.1	79.7	77.2	75.6	73.8	73.0	72.1				
20	105	99.0	92.8	87.2	81.5	76.7	71.8	67.8	63.8	60.7	57.7	55.6	53.4	52.4	51.3				
25	95.6	88.0	80.4	73.6	66.9	61.0	55.2	50.4	45.7	42.0	38.4	35.9	33.6	32.3	31.2				
30	85.2	76.4	67.7	59.8	52.1	45.4	38.8	33.3	28.1	24.0	20.2	17.5	15.0	13.7	12.5				
35	74.3	64.4	54.7	45.9	37.4	30.0	22.9	17.2	11.8	7.83	4.35	1.63	0.71	0.56	0.62				
40	62.9	52.1	41.6	32.1	23.1	15.5	8.56	3.38	0.53	0.43	0.45	0.38	0.43	0.43	0.46				
45	51.3	39.8	28.7	18.9	10.0	3.20	0.53	0.42	0.39	0.30	0.30	0.29	0.31	0.37	0.40				
50	39.7	27.6	16.4	7.00	0.60	0.43	0.38	0.30	0.29	0.32	0.29	0.35	0.35	0.42	0.45				
55	28.2	16.0	5.42	0.49	0.42	0.30	0.29	0.32	0.29	0.38	0.37	0.43	0.42	0.49	0.50				
60	17.0	5.57	0.53	0.32	0.31	0.32	0.30	0.39	0.37	0.47	0.45	0.53	0.50	0.56	0.54				
65	6.80	0.47	0.34	0.31	0.31	0.37	0.36	0.46	0.46	0.55	0.53	0.60	0.58	0.63	0.60				
70	0.54	0.35	0.32	0.33	0.35	0.43	0.45	0.54	0.54	0.63	0.63	0.70	0.67	0.72	0.69				
75	0.38	0.34	0.32	0.38	0.41	0.51	0.53	0.62	0.64	0.72	0.72	0.78	0.76	0.81	0.78				
80	0.37	0.36	0.36	0.45	0.49	0.60	0.61	0.71	0.72	0.81	0.80	0.87	0.86	0.90	0.86				
85	0.37	0.39	0.42	0.53	0.56	0.67	0.68	0.78	0.80	0.88	0.88	0.94	0.94	0.98	0.94				
90	0.37	0.43	0.47	0.58	0.63	0.73	0.75	0.85	0.86	0.94	0.94	1.01	1.00	1.05	1.01				
95	0.38	0.49	0.53	0.65	0.68	0.79	0.81	0.91	0.92	1.00	1.00	1.07	1.05	1.10	1.08				
100	0.43	0.55	0.59	0.70	0.73	0.84	0.87	0.96	0.96	1.05	1.05	1.11	1.10	1.15	1.12				
105	0.50	0.60	0.64	0.76	0.80	0.88	0.91	1.00	1.00	1.09	1.09	1.15	1.15	1.19	1.16				
110	0.52	0.65	0.68	0.79	0.81	0.92	0.95	1.03	1.04	1.12	1.11	1.18	1.16	1.21	1.18				
115	0.57	0.69	0.73	0.82	0.87	0.95	0.96	1.06	1.07	1.15	1.15	1.20	1.18	1.22	1.21				
120	0.61	0.73	0.76	0.86	0.89	0.97	0.99	1.07	1.08	1.16	1.16	1.21	1.20	1.22	1.23				
125	0.66	0.77	0.81	0.89	0.92	1.00	1.01	1.10	1.11	1.18	1.18	1.23	1.23	1.23	1.23				
130	0.69	0.79	0.82	0.92	0.95	1.03	1.05	1.14	1.15	1.20	1.20	1.22	1.22	1.19	1.23				
135	0.72	0.80	0.88	0.95	1.01	1.07	1.14	1.18	1.21	1.21	1.17	1.17	1.19	1.16	1.18				
140	0.73	0.81	0.85	0.90	0.95	0.97	1.02	1.08	1.08	1.10	1.14	1.12	1.16	1.14	1.16				
145	0.73	0.82	0.86	0.91	0.95	0.97	1.01	1.01	1.08	1.07	1.12	1.10	1.14	1.11	1.15				
150	0.75	0.83	0.86	0.92	0.94	0.97	1.00	1.01	1.06	1.07	1.10	1.09	1.12	1.09	1.12				
155	0.80	0.87	0.86	0.94	0.95	0.97	1.00	1.01	1.06	1.05	1.10	1.09	1.11	1.08	1.11				
160	0.82	0.87	0.89	0.93	0.95	0.97	1.00	1.00	1.05	1.01	1.07	1.04	1.08	1.05	1.08				
165	0.85	0.87	0.89	0.92	0.95	0.95	1.00	0.97	1.01	0.98	1.02	0.99	1.04	1.00	1.04				
170	0.86	0.86	0.89	0.90	0.95	0.94	0.97	0.95	0.99	0.96	0.99	0.95	0.99	0.95	0.99				
175	0.86	0.86	0.89	0.88	0.92	0.89	0.93	0.89	0.94	0.91	0.94	0.90	0.93	0.87	0.91				
180	0.85	0.86	0.87	0.87	0.87	0.87	0.87	0.86	0.87	0.86	0.86	0.86	0.85	0.85	0.83				

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:luominxian
 Test Date:2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity:70%
 Test Distance:8.425m [K=1.0000]
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
0.0	134.1	134.4	134.2	134.3	134.2	134.5	134.2	134.4	134.3	134.4
2.5	123.7	124.0	123.9	124.3	124.4	125.0	125.1	125.8	126.2	127.1
5.0	113.2	113.6	113.5	114.2	114.4	115.3	115.9	117.1	117.9	119.4
7.5	102.6	102.9	103.0	103.8	104.3	105.6	106.5	108.2	109.6	111.6
10.0	91.94	92.35	92.44	93.43	94.19	95.82	97.10	99.16	101.0	103.6
12.5	81.24	81.74	81.99	83.11	84.08	85.99	87.59	90.11	92.42	95.51
15.0	70.65	71.12	71.48	72.82	73.98	76.09	78.12	81.00	83.76	87.28
17.5	60.12	60.67	61.11	62.50	63.88	66.27	68.64	71.87	75.04	79.05
20.0	49.77	50.27	50.82	52.40	53.91	56.60	59.17	62.76	66.28	70.79
22.5	39.49	40.05	40.69	42.39	44.07	46.92	49.77	53.69	57.59	62.48
25.0	29.61	30.19	30.82	32.59	34.48	37.47	40.56	44.71	48.97	54.25
27.5	20.04	20.61	21.32	23.17	25.14	28.24	31.48	35.85	40.42	46.01
30.0	11.08	11.65	12.38	14.20	16.19	19.36	22.74	27.26	32.03	37.88
32.5	3.115	3.681	4.378	6.042	7.931	11.02	14.38	18.97	23.85	29.92
35.0	0.6338	0.6064	0.6700	0.6564	1.230	3.621	6.717	11.12	16.04	22.22
37.5	0.5347	0.5115	0.5757	0.5611	0.6389	0.6428	0.9484	4.186	8.739	14.78
40.0	0.4307	0.4067	0.4712	0.4526	0.5435	0.5565	0.6656	0.6698	2.116	7.886
42.5	0.3443	0.3532	0.3757	0.3667	0.4395	0.4480	0.5526	0.5839	0.7065	1.716
45.0	0.3409	0.3761	0.3651	0.3804	0.3886	0.4063	0.4533	0.4797	0.6119	0.6651
47.5	0.3533	0.4121	0.3726	0.4075	0.3869	0.4029	0.4024	0.4103	0.5116	0.5787
50.0	0.4160	0.4573	0.4117	0.4348	0.3851	0.4211	0.4006	0.4030	0.4167	0.4615
52.5	0.4570	0.5028	0.4523	0.4845	0.4210	0.4528	0.3987	0.4183	0.4197	0.4350
55.0	0.5070	0.5525	0.4933	0.5343	0.4708	0.4982	0.4300	0.4437	0.4236	0.4308
57.5	0.5653	0.6023	0.5611	0.5840	0.5203	0.5478	0.4707	0.4754	0.4276	0.4338
60.0	0.6019	0.6478	0.5975	0.6342	0.5703	0.5933	0.5115	0.5296	0.4345	0.4483
62.5	0.6609	0.6973	0.6516	0.6926	0.6201	0.6388	0.5702	0.5705	0.4751	0.4753
65.0	0.7061	0.7517	0.7016	0.7335	0.6608	0.6882	0.6064	0.6158	0.5382	0.5163
67.5	0.7559	0.7968	0.7468	0.7789	0.7152	0.7379	0.6564	0.6609	0.5692	0.5527
70.0	0.8103	0.8465	0.7922	0.8286	0.7734	0.7834	0.7152	0.7062	0.6110	0.5976
72.5	0.8599	0.8965	0.8465	0.8696	0.8057	0.8287	0.7514	0.7424	0.6472	0.6343
75.0	0.9006	0.9372	0.8917	0.9145	0.8536	0.8692	0.7922	0.7878	0.7102	0.6790
77.5	0.9415	0.9780	0.9416	0.9643	0.9007	0.9145	0.8327	0.8330	0.7368	0.7198
80.0	1.013	1.010	0.9731	1.000	0.9324	0.9552	0.8718	0.8693	0.7785	0.7605
82.5	1.026	1.050	1.014	1.033	0.9686	0.9870	0.9187	0.9055	0.8102	0.7923
85.0	1.055	1.082	1.055	1.064	1.005	1.019	0.9369	0.9416	0.8418	0.8285
87.5	1.086	1.118	1.086	1.109	1.041	1.050	0.9687	0.9689	0.8781	0.8601
90.0	1.113	1.141	1.118	1.136	1.082	1.082	1.009	0.9918	0.9098	0.8874
92.5	1.150	1.173	1.165	1.164	1.095	1.107	1.032	1.028	0.9325	0.9144
95.0	1.168	1.195	1.181	1.191	1.129	1.136	1.055	1.046	0.9505	0.9417
97.5	1.192	1.218	1.204	1.213	1.153	1.150	1.076	1.064	0.9776	0.9643
100.0	1.218	1.231	1.227	1.227	1.166	1.173	1.100	1.087	1.009	0.9778
102.5	1.236	1.250	1.245	1.250	1.182	1.195	1.114	1.114	1.019	1.014
105.0	1.254	1.268	1.250	1.252	1.222	1.213	1.145	1.131	1.032	1.021
107.5	1.277	1.269	1.267	1.255	1.231	1.216	1.159	1.141	1.050	1.033
110.0	1.308	1.271	1.267	1.257	1.231	1.220	1.163	1.143	1.050	1.039
112.5	1.311	1.256	1.266	1.257	1.231	1.218	1.163	1.144	1.073	1.040
115.0	1.308	1.246	1.265	1.254	1.233	1.211	1.163	1.143	1.081	1.040
117.5	1.290	1.245	1.265	1.246	1.235	1.186	1.163	1.142	1.085	1.041
120.0	1.277	1.233	1.264	1.234	1.236	1.175	1.163	1.145	1.095	1.039
122.5	1.265	1.231	1.260	1.227	1.236	1.171	1.163	1.115	1.092	1.037
125.0	1.250	1.204	1.250	1.222	1.222	1.167	1.163	1.103	1.089	1.035
127.5	1.240	1.190	1.240	1.200	1.209	1.161	1.159	1.095	1.088	1.033
130.0	1.226	1.163	1.218	1.177	1.192	1.159	1.150	1.088	1.087	1.031
132.5	1.209	1.152	1.191	1.162	1.178	1.149	1.145	1.085	1.085	1.029
135.0	1.201	1.140	1.190	1.157	1.170	1.143	1.137	1.086	1.084	1.026
137.5	1.186	1.125	1.172	1.154	1.161	1.138	1.127	1.081	1.083	1.024
140.0	1.164	1.104	1.154	1.122	1.141	1.095	1.118	1.073	1.077	1.012
142.5	1.136	1.100	1.127	1.091	1.121	1.094	1.109	1.052	1.068	1.007
145.0	1.118	1.082	1.118	1.086	1.110	1.092	1.096	1.040	1.054	1.001
147.5	1.100	1.041	1.091	1.064	1.096	1.064	1.078	1.027	1.046	0.9733
150.0	1.077	1.032	1.073	1.037	1.077	1.041	1.067	1.011	1.027	0.9681
152.5	1.064	1.008	1.055	1.025	1.061	1.028	1.058	1.006	1.021	0.9628
155.0	1.037	1.003	1.046	1.010	1.050	1.014	1.048	1.003	1.014	0.9588
157.5	1.023	0.9954	1.032	0.9914	1.041	1.009	1.032	0.9959	1.005	0.9542
160.0	0.9871	0.9503	0.9961	0.9597	1.005	0.9642	1.014	0.9597	0.9915	0.9512
162.5	0.9644	0.9343	0.9778	0.9415	0.9823	0.9417	0.9869	0.9396	0.9704	0.9415
165.0	0.9325	0.8962	0.9372	0.9008	0.9462	0.9275	0.9508	0.9294	0.9628	0.9279
167.5	0.8991	0.8602	0.9011	0.8664	0.9102	0.8827	0.9310	0.9053	0.9417	0.8963
170.0	0.8693	0.8283	0.8694	0.8464	0.8828	0.8692	0.9236	0.8817	0.9100	0.8646
172.5	0.8284	0.7875	0.8285	0.7922	0.8465	0.8374	0.8782	0.8549	0.8783	0.8601
175.0	0.7834	0.7424	0.7877	0.7740	0.8278	0.8012	0.8465	0.7967	0.8510	0.8102
177.5	0.7379	0.7107	0.7426	0.7378	0.7832	0.7514	0.7967	0.7740	0.8103	0.7877
180.0	0.6971	0.6971	0.7198	0.7243	0.7379	0.7379	0.7605	0.7469	0.7650	0.7650

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: luominxian
 Test Date: 2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity: 70%
 Test Distance: 8.425m [K=1.0000]
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
0.0	134.4	134.5	134.4	134.6	134.6	134.6	134.6	134.8	134.8	134.9
2.5	127.5	128.4	129.1	130.1	130.9	131.9	132.7	133.7	134.7	135.6
5.0	120.4	122.1	123.5	125.3	126.8	128.7	130.4	132.3	134.2	136.1
7.5	113.4	115.6	117.8	120.2	122.5	125.3	127.9	130.7	133.4	136.1
10.0	106.0	108.8	111.8	114.9	118.0	121.6	125.1	128.7	132.2	135.9
12.5	98.44	102.0	105.5	109.5	113.4	117.7	121.9	126.4	130.8	135.4
15.0	90.74	94.95	99.14	103.8	108.4	113.5	118.6	123.9	129.2	134.6
17.5	83.11	87.83	92.55	97.88	103.3	109.2	114.9	121.1	127.2	133.5
20.0	75.28	80.59	85.88	91.89	97.92	104.6	111.1	118.1	125.0	132.1
22.5	67.46	73.30	79.13	85.69	92.46	99.62	107.0	114.7	122.4	130.4
25.0	59.60	65.84	72.30	79.43	86.77	94.67	102.6	111.2	119.7	128.4
27.5	51.80	58.51	65.38	73.10	80.98	89.55	98.12	107.5	116.7	126.2
30.0	44.01	51.16	58.45	66.70	75.05	84.18	93.48	103.4	113.3	123.6
32.5	36.29	43.75	51.55	60.18	69.04	78.82	88.63	99.27	109.7	120.8
35.0	28.78	36.52	44.58	53.68	63.00	73.24	83.68	94.83	106.1	117.7
37.5	21.44	29.34	37.71	47.16	56.91	67.58	78.56	90.26	102.1	114.5
40.0	14.41	22.37	30.92	40.66	50.76	61.87	73.27	85.48	97.92	110.9
42.5	7.833	15.65	24.26	34.20	44.59	56.10	67.97	80.61	93.58	107.1
45.0	1.922	9.283	17.81	27.86	38.54	50.26	62.49	75.63	89.05	103.1
47.5	0.7153	3.683	11.64	21.66	32.48	44.49	56.99	70.51	84.42	98.98
50.0	0.6248	0.7058	5.967	15.62	26.47	38.68	51.43	65.29	79.56	94.63
52.5	0.5208	0.6063	1.287	9.895	20.61	32.96	45.88	60.01	74.66	90.04
55.0	0.4403	0.5019	0.7111	4.688	14.93	27.26	40.33	54.65	69.52	85.40
57.5	0.4332	0.4420	0.6071	0.8718	9.513	21.66	34.86	49.30	64.41	80.60
60.0	0.4336	0.4391	0.5073	0.6515	4.567	16.20	29.45	43.93	59.19	75.59
62.5	0.4341	0.4434	0.4572	0.5386	0.9018	10.93	24.03	38.57	53.87	70.52
65.0	0.4363	0.4500	0.4575	0.4816	0.7065	6.003	18.73	33.24	48.58	65.32
67.5	0.4526	0.4635	0.4583	0.4761	0.5977	1.959	13.50	27.97	43.32	60.03
70.0	0.5023	0.4755	0.4592	0.4707	0.5204	0.7010	8.534	22.80	38.04	54.77
72.5	0.5251	0.5115	0.4600	0.4692	0.5080	0.5884	3.986	17.63	32.81	49.47
75.0	0.5794	0.5434	0.4609	0.4703	0.5024	0.5206	0.8564	12.56	27.58	44.12
77.5	0.6110	0.5797	0.4617	0.4782	0.4904	0.5187	0.6973	7.645	22.42	38.78
80.0	0.6473	0.6157	0.4980	0.4888	0.4856	0.5169	0.6248	3.209	17.28	33.52
82.5	0.6789	0.6564	0.5340	0.5025	0.4828	0.5080	0.6065	0.7378	12.20	28.24
85.0	0.7197	0.6927	0.5794	0.5343	0.4799	0.5040	0.5840	0.6563	7.232	23.02
87.5	0.7513	0.7198	0.6020	0.5704	0.4873	0.5029	0.5705	0.6337	2.559	17.69
90.0	0.7831	0.7472	0.6380	0.5931	0.4966	0.5026	0.5568	0.5975	0.7742	12.28
92.5	0.8057	0.7787	0.6519	0.6202	0.5025	0.5025	0.5343	0.5794	0.7291	6.743
95.0	0.8420	0.8058	0.6923	0.6474	0.5249	0.5025	0.5260	0.5704	0.6881	0.7783
97.5	0.8701	0.8285	0.7152	0.6881	0.5702	0.5206	0.5116	0.5431	0.6564	0.7152
100.0	0.8917	0.8502	0.7469	0.7199	0.5893	0.5479	0.5021	0.5160	0.6204	0.6563
102.5	0.9098	0.8647	0.7695	0.7469	0.6155	0.5795	0.4987	0.5025	0.5750	0.6018
105.0	0.9306	0.9099	0.8011	0.7652	0.6518	0.6112	0.4980	0.4797	0.5343	0.5638
107.5	0.9461	0.9236	0.8211	0.7877	0.6699	0.6384	0.4980	0.4798	0.5116	0.5176
110.0	0.9593	0.9331	0.8465	0.8066	0.6970	0.6491	0.4980	0.4799	0.4710	0.4707
112.5	0.9732	0.9356	0.8548	0.8080	0.7186	0.6532	0.5232	0.4981	0.4482	0.4346
115.0	0.9694	0.9381	0.8610	0.8095	0.7220	0.6609	0.5430	0.5207	0.4380	0.4205
117.5	0.9708	0.9406	0.8651	0.8104	0.7251	0.6790	0.5702	0.5388	0.4361	0.4123
120.0	0.9722	0.9469	0.8677	0.8240	0.7293	0.6944	0.5794	0.5551	0.4434	0.4120
122.5	0.9736	0.9506	0.8703	0.8375	0.7355	0.7064	0.5975	0.5727	0.4617	0.4391
125.0	0.9750	0.9506	0.8730	0.8479	0.7470	0.7288	0.6154	0.5912	0.4844	0.4573
127.5	0.9764	0.9506	0.8744	0.8581	0.7581	0.7379	0.6289	0.6110	0.5024	0.4799
130.0	0.9793	0.9506	0.8784	0.8673	0.7651	0.7507	0.6429	0.6194	0.5205	0.4980
132.5	0.9853	0.9506	0.8827	0.8737	0.7876	0.7662	0.6563	0.6331	0.5477	0.5207
135.0	0.9882	0.9506	0.8921	0.8783	0.7966	0.7742	0.6639	0.6519	0.5740	0.5476
137.5	0.9879	0.9506	0.8983	0.8842	0.7967	0.7904	0.6745	0.6710	0.5826	0.5660
140.0	0.9877	0.9506	0.9008	0.8859	0.7991	0.7974	0.7016	0.6836	0.5930	0.5841
142.5	0.9874	0.9506	0.9008	0.8876	0.8013	0.8058	0.7377	0.7017	0.6202	0.6111
145.0	0.9871	0.9498	0.9008	0.8893	0.8130	0.8116	0.7378	0.7243	0.6475	0.6387
147.5	0.9833	0.9478	0.9008	0.8910	0.8108	0.8221	0.7379	0.7425	0.6735	0.6790
150.0	0.9760	0.9457	0.9008	0.8963	0.8195	0.8419	0.7596	0.7605	0.7242	0.7062
152.5	0.9742	0.9436	0.9008	0.9057	0.8420	0.8556	0.8012	0.7923	0.7345	0.7289
155.0	0.9724	0.9416	0.9008	0.9145	0.8823	0.8650	0.8374	0.8284	0.7694	0.7831
157.5	0.9706	0.9395	0.9407	0.9279	0.8880	0.8712	0.8486	0.8284	0.7890	0.7922
160.0	0.9661	0.9362	0.9362	0.8962	0.8889	0.8704	0.8498	0.8284	0.8056	0.8035
162.5	0.9575	0.9280	0.9316	0.8819	0.8899	0.8651	0.8511	0.8284	0.8056	0.8102
165.0	0.9461	0.9008	0.9235	0.8692	0.8908	0.8598	0.8523	0.8284	0.8057	0.8203
167.5	0.9191	0.8751	0.9008	0.8659	0.8917	0.8442	0.8536	0.8284	0.8057	0.8283
170.0	0.9011	0.8600	0.8964	0.8556	0.8783	0.8378	0.8548	0.8284	0.8057	0.8283
172.5	0.8739	0.8329	0.8710	0.8419	0.8631	0.8346	0.8530	0.8284	0.8057	0.8283
175.0	0.8465	0.8058	0.8511	0.8193	0.8556	0.8288	0.8458	0.8284	0.8058	0.8284
177.5	0.8194	0.7960	0.8284	0.8112	0.8420	0.8188	0.8375	0.8284	0.8058	0.8284
180.0	0.7831	0.7786	0.8013	0.8058	0.8194	0.8148	0.8284	0.8284	0.8103	0.8284

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: luominxian
 Test Date: 2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity: 70%
 Test Distance: 8.425m [K=1.0000]
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
0.0	135.0	135.0	135.1	135.1	135.3	135.3	135.6	135.4	135.7	135.5
2.5	136.5	137.5	138.5	139.3	140.3	141.0	142.0	142.6	143.5	143.9
5.0	137.9	139.6	141.5	143.2	145.1	146.6	148.2	149.5	151.1	152.1
7.5	138.8	141.4	144.3	146.8	149.4	151.7	154.2	156.3	158.4	159.8
10.0	139.6	143.0	146.8	150.2	153.6	156.7	159.8	162.6	165.3	167.5
12.5	139.9	144.4	148.8	153.0	157.4	161.1	165.2	168.6	172.1	174.8
15.0	139.8	145.3	150.6	155.7	160.8	165.5	170.2	174.4	178.3	181.7
17.5	139.8	145.9	152.1	158.0	163.9	169.4	174.9	179.8	184.3	188.2
20.0	139.2	146.3	153.1	159.9	166.7	172.9	179.1	184.8	190.0	194.5
22.5	138.2	146.1	154.0	161.6	169.1	176.1	183.1	189.3	195.3	200.3
25.0	137.1	145.7	154.4	162.8	171.1	179.0	186.5	193.6	200.2	206.0
27.5	135.6	145.1	154.5	163.8	172.8	181.4	189.8	197.5	204.5	210.8
30.0	133.8	144.1	154.2	164.2	174.2	183.4	192.4	200.9	208.6	215.5
32.5	131.8	142.7	153.8	164.4	175.1	185.1	194.8	203.6	212.1	219.6
35.0	129.4	141.2	152.9	164.4	175.6	186.3	196.8	206.4	215.3	223.1
37.5	126.7	139.2	151.6	163.8	175.7	187.2	198.3	208.2	217.8	226.3
40.0	123.9	137.1	150.1	162.9	175.5	187.8	199.2	210.0	220.1	229.0
42.5	120.8	134.5	148.1	161.8	175.1	187.7	199.9	211.3	221.7	231.1
45.0	117.3	131.7	146.1	160.2	173.9	187.4	200.0	211.7	222.8	232.7
47.5	113.7	128.7	143.5	158.2	172.6	186.5	199.7	212.1	223.7	233.7
50.0	109.8	125.3	140.7	155.9	170.9	185.4	199.0	211.9	223.8	234.5
52.5	105.7	121.8	137.6	153.5	169.0	183.8	197.8	211.3	223.5	234.4
55.0	101.4	117.9	134.2	150.5	166.4	181.9	196.3	209.9	222.7	234.0
57.5	96.93	113.8	130.6	147.4	163.5	179.3	194.2	208.4	221.3	233.1
60.0	92.32	109.6	126.7	143.9	160.5	176.5	191.8	206.3	219.6	231.8
62.5	87.54	105.0	122.6	140.1	157.0	173.5	189.0	203.8	217.4	229.7
65.0	82.54	100.4	118.2	136.1	153.3	170.0	185.9	201.0	214.7	227.3
67.5	77.48	95.50	113.6	131.6	149.2	166.3	182.3	197.5	211.6	224.3
70.0	72.27	90.53	108.7	127.1	144.8	162.2	178.4	193.8	207.8	220.9
72.5	66.96	85.32	103.7	122.3	140.2	157.6	173.9	189.5	203.6	216.7
75.0	61.55	80.02	98.47	117.2	135.3	152.7	168.9	184.6	198.9	212.0
77.5	56.10	74.57	93.09	112.0	129.8	147.3	163.7	179.3	193.8	207.0
80.0	50.62	69.00	87.57	106.2	123.9	141.5	157.8	173.6	188.2	201.5
82.5	45.19	63.53	81.74	100.1	117.8	135.3	151.8	167.5	182.2	195.7
85.0	39.80	57.71	75.55	93.77	111.4	128.9	145.3	161.4	175.7	189.3
87.5	34.19	51.57	69.13	87.10	104.7	122.1	138.6	154.6	169.1	182.7
90.0	28.35	45.30	62.63	80.41	97.90	115.3	131.8	147.7	162.2	175.7
92.5	22.70	39.30	56.20	73.77	91.06	108.3	124.7	140.5	155.0	168.5
95.0	17.11	33.47	50.01	67.19	84.17	101.4	117.4	133.2	147.4	160.9
97.5	9.325	27.70	43.89	60.73	77.34	94.13	110.0	125.7	139.8	153.1
100.0	0.9250	19.28	37.73	54.21	70.42	86.92	102.6	118.0	131.9	145.1
102.5	0.7475	11.27	28.63	47.66	63.56	79.59	94.98	110.1	123.8	136.7
105.0	0.6840	0.8218	20.17	37.81	56.15	72.32	87.33	102.1	115.6	128.3
107.5	0.6294	0.6696	11.30	28.74	45.60	63.85	79.49	93.96	107.1	119.6
110.0	0.5794	0.5974	0.7563	19.74	35.97	52.79	69.39	85.67	98.48	110.6
112.5	0.5387	0.5475	0.6794	9.164	26.44	42.54	57.98	73.88	88.69	101.5
115.0	0.4980	0.4979	0.6067	0.6609	16.32	32.48	47.14	62.08	75.81	89.49
117.5	0.4572	0.4571	0.5613	0.5884	0.7791	22.02	36.47	50.78	63.63	76.42
120.0	0.4301	0.4263	0.5117	0.5296	0.6656	7.439	25.42	39.43	51.73	63.83
122.5	0.4074	0.4150	0.4754	0.4840	0.5976	0.6564	11.66	27.82	39.88	51.49
125.0	0.4000	0.4137	0.4483	0.4480	0.5614	0.6019	0.7335	13.63	27.53	39.02
127.5	0.4040	0.4125	0.4274	0.4470	0.5418	0.5876	0.6982	1.960	10.95	25.84
130.0	0.4164	0.4301	0.4075	0.4459	0.5383	0.6025	0.6523	0.9340	0.7561	3.907
132.5	0.4301	0.4617	0.4079	0.4449	0.5347	0.6400	0.6463	0.6563	0.7350	0.7097
135.0	0.4573	0.4890	0.4149	0.4439	0.5312	0.6438	0.6654	0.6504	0.6792	0.6790
137.5	0.4978	0.5207	0.4390	0.4890	0.5430	0.6476	0.6592	0.6474	0.6296	0.6244
140.0	0.5115	0.5525	0.4978	0.5207	0.5253	0.5309	0.5976	0.5928	0.6238	0.5879
142.5	0.5457	0.5977	0.5295	0.5569	0.5264	0.5182	0.5117	0.5069	0.5977	0.5794
145.0	0.5846	0.6338	0.5656	0.5857	0.5274	0.5202	0.4943	0.4819	0.5162	0.5112
147.5	0.6201	0.6611	0.5883	0.5930	0.5285	0.5342	0.4939	0.4753	0.4664	0.4778
150.0	0.6518	0.6845	0.6011	0.6111	0.5296	0.5460	0.4935	0.4891	0.4676	0.4663
152.5	0.6881	0.6994	0.6112	0.6248	0.5513	0.5614	0.5168	0.5161	0.4692	0.4800
155.0	0.7140	0.7110	0.6445	0.6429	0.5748	0.5886	0.5206	0.5390	0.4708	0.5025
157.5	0.7225	0.7335	0.6619	0.6700	0.6016	0.6158	0.5521	0.5659	0.5068	0.5344
160.0	0.7288	0.7425	0.6745	0.6926	0.6292	0.6474	0.5767	0.5977	0.5340	0.5614
162.5	0.7424	0.7651	0.6926	0.7152	0.6519	0.6791	0.6110	0.6296	0.5711	0.6021
165.0	0.7577	0.7742	0.7179	0.7379	0.6816	0.7062	0.6517	0.6700	0.6107	0.6296
167.5	0.7831	0.7969	0.7333	0.7616	0.7108	0.7379	0.6791	0.7062	0.6609	0.6701
170.0	0.7937	0.8148	0.7515	0.7877	0.7332	0.7696	0.7152	0.7425	0.6833	0.7154
172.5	0.8012	0.8285	0.7921	0.8103	0.7603	0.7926	0.7424	0.7742	0.7197	0.7515
175.0	0.8080	0.8421	0.7967	0.8285	0.7922	0.8285	0.8013	0.8104	0.7604	0.7878
177.5	0.8137	0.8465	0.8103	0.8466	0.8103	0.8511	0.8088	0.8421	0.7992	0.8285
180.0	0.8239	0.8465	0.8239	0.8646	0.8510	0.8737	0.8737	0.8646	0.8601	0.8646

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: luominxian
 Test Date: 2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity: 70%
 Test Distance: 8.425m [K=1.0000]
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	150.0	155.0	160.0	165.0	170.0	175.0	180.0	185.0	190.0	195.0
0.0	135.8	135.5	135.7	135.4	135.5	135.0	134.1	134.4	134.2	134.3
2.5	144.7	144.8	145.3	145.3	145.4	145.9	145.0	144.6	145.1	144.3
5.0	153.2	153.9	154.7	154.8	155.5	156.0	155.3	154.6	154.9	154.2
7.5	161.6	162.5	163.8	164.2	165.0	165.8	165.2	164.4	164.8	163.5
10.0	169.7	171.2	172.8	173.4	174.4	175.5	174.7	174.0	174.1	172.7
12.5	177.5	179.4	181.3	182.3	183.3	184.7	184.1	183.3	183.4	181.7
15.0	185.2	187.3	189.4	190.9	192.3	193.5	193.2	192.1	192.2	190.3
17.5	192.2	194.8	197.5	199.2	200.5	202.1	201.7	200.9	200.8	198.6
20.0	198.8	202.1	205.0	207.0	208.6	210.4	210.3	209.2	208.9	206.6
22.5	205.2	208.9	212.0	214.5	216.4	218.3	218.5	217.0	217.1	214.0
25.0	211.2	215.3	218.9	221.6	223.6	225.5	225.7	224.5	224.2	221.1
27.5	216.5	221.2	225.4	228.1	230.5	232.8	232.7	231.5	231.1	228.0
30.0	221.7	226.8	231.3	234.4	236.9	239.2	239.5	238.0	237.5	234.3
32.5	226.3	231.7	236.7	240.0	242.9	245.3	245.8	244.1	243.5	239.7
35.0	230.3	236.2	241.5	245.1	248.0	250.5	251.5	249.9	248.9	245.2
37.5	233.9	240.2	245.6	249.9	253.1	255.5	256.8	255.0	254.1	249.9
40.0	237.0	243.8	249.5	253.8	257.2	260.2	261.4	259.2	258.6	253.9
42.5	239.6	246.7	252.7	257.3	261.0	263.8	265.1	263.2	262.3	257.6
45.0	241.6	249.1	255.5	260.5	264.0	267.4	268.5	266.5	265.7	260.7
47.5	243.1	251.1	257.5	262.8	266.7	270.1	271.2	269.9	268.3	263.2
50.0	244.0	252.3	259.2	264.5	268.6	272.2	273.9	273.0	270.5	265.2
52.5	244.5	253.2	260.1	266.1	271.8	273.9	275.5	274.6	272.0	266.6
55.0	244.3	253.3	260.7	266.7	272.2	274.9	276.3	275.3	273.1	267.1
57.5	243.7	252.9	260.6	266.7	272.4	274.9	277.1	275.8	273.1	267.4
60.0	242.6	252.0	259.7	266.1	271.4	274.4	276.5	275.3	272.4	266.8
62.5	240.8	250.4	258.3	265.0	270.6	273.6	275.6	274.3	272.0	265.5
65.0	238.5	248.4	256.4	263.1	268.9	272.3	273.7	273.0	268.7	264.0
67.5	235.8	245.6	253.9	260.6	266.7	268.4	271.6	270.5	266.5	261.8
70.0	232.3	242.4	250.8	257.5	263.9	265.4	267.4	268.0	263.6	258.4
72.5	228.4	238.5	247.0	253.9	260.2	261.7	263.9	264.1	260.0	255.2
75.0	223.9	234.2	242.8	249.7	255.8	257.7	259.9	259.7	256.1	250.9
77.5	218.9	229.4	237.9	245.0	251.1	253.0	255.3	255.4	251.3	246.2
80.0	213.3	224.1	232.5	239.6	245.8	247.8	249.8	250.0	245.9	241.1
82.5	207.4	218.3	226.7	233.9	239.8	242.1	244.2	244.3	240.4	235.1
85.0	201.1	212.0	220.5	227.9	234.0	236.0	238.3	238.0	234.2	229.1
87.5	194.6	205.3	213.9	221.2	226.8	229.4	231.6	231.8	227.6	222.5
90.0	187.6	198.3	206.9	214.1	220.0	222.3	224.5	224.4	220.5	215.4
92.5	180.2	190.8	199.6	206.7	212.5	214.8	217.0	217.0	213.1	208.1
95.0	172.7	183.1	191.7	198.9	204.7	206.9	209.1	209.0	205.4	200.1
97.5	164.7	175.2	183.5	190.6	196.4	198.6	200.9	200.4	197.1	191.8
100.0	156.5	166.8	175.0	182.1	187.6	190.1	192.3	192.1	188.6	183.5
102.5	148.0	158.3	166.4	173.3	178.9	181.1	183.4	183.0	179.7	174.8
105.0	139.4	149.5	157.3	164.2	169.5	172.0	174.2	173.9	170.5	165.6
107.5	130.3	140.3	148.1	154.7	160.2	162.2	164.4	164.5	160.9	156.2
110.0	121.3	130.9	138.4	145.1	150.2	152.4	154.5	154.4	151.2	146.5
112.5	111.9	121.2	128.7	135.0	139.5	142.2	144.5	144.1	141.1	136.5
115.0	101.4	111.5	118.6	124.9	128.9	131.8	133.9	132.9	130.7	126.3
117.5	87.48	98.07	106.4	113.5	117.9	121.0	123.3	122.3	120.1	115.4
120.0	74.21	84.04	91.79	98.55	103.0	106.3	109.2	107.8	105.5	100.4
122.5	61.28	70.62	77.81	84.22	88.36	91.46	94.06	92.88	90.61	85.98
125.0	48.45	57.28	64.18	70.25	74.07	77.08	79.51	78.37	76.38	71.93
127.5	35.39	43.99	50.50	56.38	59.98	62.83	65.17	64.07	62.18	57.92
130.0	20.67	30.09	36.52	42.30	45.73	48.46	50.83	49.76	47.88	43.83
132.5	0.7472	10.22	20.73	27.29	30.85	33.62	36.17	35.06	33.24	29.07
135.0	0.7025	0.7915	0.7213	1.906	8.340	14.46	19.16	17.50	14.61	5.414
137.5	0.6828	0.6940	0.6914	0.8874	0.6610	0.6383	0.7295	0.3215	0.3260	0.3486
140.0	0.6295	0.6246	0.6882	0.6648	0.6610	0.6429	0.3098	0.3345	0.3468	0.3576
142.5	0.6022	0.5928	0.6071	0.5749	0.6157	0.5703	0.3124	0.3622	0.3452	0.3484
145.0	0.5870	0.5704	0.5884	0.5607	0.5522	0.5176	0.3124	0.3250	0.3296	0.3442
147.5	0.5208	0.5023	0.5666	0.5296	0.5299	0.5100	0.3667	0.3526	0.3502	0.3621
150.0	0.4708	0.4692	0.4895	0.4899	0.4937	0.4526	0.3538	0.3489	0.3323	0.3445
152.5	0.4736	0.4668	0.4674	0.4718	0.4473	0.4390	0.3353	0.3214	0.3199	0.3225
155.0	0.4764	0.4844	0.4701	0.4617	0.4432	0.4391	0.3248	0.3177	0.3205	0.3163
157.5	0.4792	0.5025	0.4728	0.4799	0.4416	0.4527	0.3261	0.3260	0.3350	0.3191
160.0	0.5158	0.5342	0.4840	0.5029	0.4436	0.4844	0.3532	0.3344	0.3622	0.3259
162.5	0.5341	0.5617	0.5069	0.5478	0.4934	0.5115	0.3803	0.3662	0.3984	0.3576
165.0	0.5749	0.6067	0.5523	0.5840	0.5248	0.5433	0.4166	0.3802	0.4348	0.3936
167.5	0.6197	0.6430	0.5926	0.6204	0.5701	0.5885	0.4464	0.4255	0.4845	0.4390
170.0	0.6572	0.6927	0.6383	0.6701	0.6201	0.6429	0.4849	0.4753	0.5299	0.4978
172.5	0.7016	0.7288	0.6788	0.7108	0.6609	0.6885	0.5432	0.5340	0.5795	0.5431
175.0	0.7421	0.7744	0.7243	0.7560	0.7194	0.7515	0.5886	0.5767	0.6294	0.5884
177.5	0.7831	0.8241	0.7921	0.8013	0.7560	0.7787	0.6429	0.6110	0.6837	0.6518
180.0	0.8601	0.8601	0.8284	0.8420	0.8103	0.8148	0.6609	0.6564	0.7198	0.7017

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: luominxian
 Test Date: 2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity: 70%
 Test Distance: 8.425m [K=1.0000]
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	200.0	205.0	210.0	215.0	220.0	225.0	230.0	235.0	240.0	245.0
0.0	134.2	134.5	134.2	134.4	134.3	134.4	134.4	134.5	134.4	134.6
2.5	143.8	143.7	143.1	142.9	142.1	141.7	140.9	140.4	139.5	138.8
5.0	153.2	152.9	151.7	151.1	149.6	148.7	147.2	145.9	144.4	142.9
7.5	162.4	161.7	160.1	158.8	157.0	155.3	153.1	151.1	148.8	146.5
10.0	171.3	170.1	168.2	166.5	164.1	161.8	158.9	156.1	153.0	149.9
12.5	180.0	178.5	176.0	173.8	170.7	167.7	164.3	160.7	156.9	152.8
15.0	188.4	186.4	183.5	180.8	177.2	173.6	169.4	165.1	160.3	155.6
17.5	196.4	194.1	190.6	187.4	183.3	178.9	174.1	169.0	163.5	158.0
20.0	204.0	201.4	197.5	193.7	188.8	183.9	178.4	172.6	166.3	159.9
22.5	211.2	208.2	203.9	199.6	194.2	188.5	182.4	175.8	168.7	161.5
25.0	218.2	214.5	210.0	205.1	199.0	193.0	185.9	178.8	170.9	163.0
27.5	224.4	220.7	215.5	210.1	203.7	196.8	189.1	181.2	172.7	163.9
30.0	230.6	226.2	220.7	214.8	207.7	200.2	191.9	183.3	174.1	164.4
32.5	235.9	231.3	225.4	219.0	211.4	203.4	194.2	185.1	175.0	164.7
35.0	240.9	235.9	229.6	222.7	214.5	205.9	196.4	186.2	175.7	164.7
37.5	245.6	240.0	233.5	225.8	217.3	208.1	198.0	187.2	176.0	164.3
40.0	249.4	243.6	236.5	228.6	219.7	209.6	199.1	187.7	175.7	163.4
42.5	252.6	246.9	239.3	230.9	221.3	211.0	199.7	187.8	175.3	162.3
45.0	255.4	249.2	241.5	232.6	222.6	211.7	199.9	187.4	174.3	160.7
47.5	257.8	251.1	243.0	233.9	223.5	212.0	199.8	186.7	173.1	158.9
50.0	259.4	252.7	244.1	234.5	223.7	211.9	199.2	185.6	171.4	156.6
52.5	260.7	253.5	244.8	234.7	223.5	211.3	198.1	184.1	169.5	154.2
55.0	261.2	253.8	244.5	234.5	222.9	210.2	196.6	182.0	167.1	151.3
57.5	261.3	253.6	244.3	233.6	221.7	208.7	194.8	179.8	164.3	148.2
60.0	260.7	252.7	243.1	232.3	220.2	206.8	192.4	177.2	161.3	144.7
62.5	259.3	251.3	241.7	230.5	218.3	204.6	189.8	174.1	157.9	141.0
65.0	257.5	249.3	239.4	228.2	215.7	201.8	186.9	170.8	154.2	137.0
67.5	255.2	246.7	236.8	225.3	212.7	198.5	183.4	167.1	150.3	132.7
70.0	252.1	243.6	233.6	222.0	209.2	194.8	179.7	163.2	146.2	128.2
72.5	248.4	240.0	229.6	217.9	205.2	190.7	175.3	158.8	141.5	123.5
75.0	244.1	235.6	225.3	213.5	200.5	186.0	170.6	154.0	136.8	118.5
77.5	239.5	230.7	220.5	208.6	195.5	180.9	165.4	148.8	131.6	113.5
80.0	234.2	225.4	215.1	203.1	190.0	175.3	159.8	143.1	125.9	107.9
82.5	228.5	219.7	209.4	197.3	183.9	169.4	153.8	137.1	119.8	101.9
85.0	222.3	213.5	203.2	191.0	177.7	163.1	147.5	130.7	113.6	95.68
87.5	215.7	206.9	196.5	184.4	171.1	156.4	140.9	124.1	107.0	89.17
90.0	208.7	199.9	189.7	177.6	164.4	149.7	134.1	117.4	100.4	82.58
92.5	201.3	192.5	182.3	170.3	157.3	142.5	127.2	110.5	93.54	75.94
95.0	193.5	184.9	174.9	162.8	149.8	135.2	119.9	103.5	86.68	69.40
97.5	185.5	176.8	166.9	155.1	142.2	127.8	112.7	96.32	79.85	62.85
100.0	177.2	168.6	158.8	147.1	134.4	120.1	105.2	89.16	72.99	56.28
102.5	168.5	160.0	150.3	138.7	126.3	112.2	97.54	81.87	66.07	49.72
105.0	159.5	151.2	141.7	130.2	118.0	104.2	89.83	74.47	59.06	40.20
107.5	150.1	142.0	132.7	121.6	109.5	96.07	82.01	66.59	48.69	30.87
110.0	140.6	132.6	123.5	112.6	100.9	87.75	72.85	55.38	38.75	21.67
112.5	130.8	123.0	114.1	103.5	91.90	76.56	61.08	44.88	29.09	11.73
115.0	120.8	113.2	104.3	92.05	78.94	64.52	50.05	34.61	18.97	0.4351
117.5	109.2	100.3	90.43	78.72	66.53	52.93	39.17	24.03	4.198	0.3713
120.0	94.44	86.13	77.01	66.05	54.53	41.53	28.10	11.61	0.3573	0.3441
122.5	80.43	72.55	64.02	53.46	42.56	29.83	15.71	0.4258	0.3486	0.3170
125.0	66.64	59.24	51.04	40.96	30.23	16.62	0.4028	0.3910	0.3486	0.3259
127.5	52.87	45.79	37.89	27.83	15.81	0.4754	0.4029	0.3989	0.3486	0.3348
130.0	38.97	31.92	23.76	9.522	2.749	0.4445	0.4436	0.4069	0.3713	0.3438
132.5	23.89	14.68	0.8303	0.5542	0.5212	0.4660	0.4895	0.4521	0.4400	0.3527
135.0	0.5308	0.5070	0.5981	0.6469	0.7031	0.6648	0.7111	0.6953	0.6263	0.5241
137.5	0.3777	0.4865	0.5703	0.6763	0.6326	0.6931	0.6522	0.6307	0.5193	0.4941
140.0	0.3621	0.4483	0.4255	0.4805	0.4702	0.5343	0.4392	0.4302	0.3983	0.4165
142.5	0.3395	0.3757	0.3852	0.4464	0.4025	0.4166	0.3569	0.3803	0.3984	0.4127
145.0	0.3578	0.3607	0.3665	0.4032	0.3552	0.3531	0.3537	0.3712	0.3984	0.4146
147.5	0.3530	0.3476	0.3462	0.3396	0.3462	0.3453	0.3621	0.3712	0.4165	0.4165
150.0	0.3169	0.3304	0.3272	0.3315	0.3483	0.3470	0.3804	0.3712	0.4392	0.4346
152.5	0.3169	0.3228	0.3328	0.3332	0.3712	0.3575	0.4119	0.3847	0.4708	0.4527
155.0	0.3262	0.3296	0.3532	0.3349	0.3940	0.3712	0.4436	0.4253	0.4982	0.5025
157.5	0.3531	0.3365	0.3848	0.3594	0.4211	0.4027	0.4709	0.4527	0.5342	0.5241
160.0	0.3894	0.3664	0.4165	0.3847	0.4484	0.4330	0.5070	0.4977	0.5614	0.5522
162.5	0.4211	0.3846	0.4482	0.4226	0.4799	0.4572	0.5296	0.5161	0.5975	0.5794
165.0	0.4531	0.4254	0.4847	0.4526	0.5206	0.5024	0.5659	0.5431	0.6113	0.6020
167.5	0.4937	0.4705	0.5297	0.5024	0.5569	0.5568	0.6021	0.5748	0.6474	0.6336
170.0	0.5523	0.5214	0.5708	0.5431	0.6112	0.5838	0.6383	0.6245	0.6836	0.6608
172.5	0.5931	0.5749	0.6247	0.5929	0.6474	0.6291	0.6881	0.6519	0.7243	0.7196
175.0	0.6474	0.6156	0.6701	0.6472	0.6838	0.6609	0.7243	0.6880	0.7515	0.7288
177.5	0.6928	0.6564	0.7153	0.6834	0.7289	0.6971	0.7470	0.7287	0.7742	0.7424
180.0	0.7288	0.7243	0.7288	0.7243	0.7334	0.7379	0.7515	0.7649	0.7922	0.7967

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: luominxian
Test Date: 2018-04-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
Humidity: 70%
Test Distance: 8.425m [K=1.0000]
Remarks: 壁灯

Photometric Data Table [cd]

G/C	250.0	255.0	260.0	265.0	270.0	275.0	280.0	285.0	290.0	295.0
0.0	134.6	134.6	134.6	134.8	134.8	134.9	135.0	135.0	135.1	135.1
2.5	138.0	137.2	136.4	135.6	134.7	133.9	133.1	132.2	131.5	130.6
5.0	141.1	139.4	137.8	136.1	134.4	132.5	130.9	129.2	127.6	125.9
7.5	143.9	141.5	138.8	136.2	133.6	131.0	128.4	125.8	123.4	120.9
10.0	146.5	143.1	139.6	136.1	132.6	129.0	125.7	122.2	119.0	115.7
12.5	148.6	144.5	140.0	135.8	131.4	126.9	122.6	118.3	114.3	110.2
15.0	150.6	145.5	140.2	135.0	129.7	124.5	119.3	114.2	109.5	104.5
17.5	152.1	146.1	140.0	133.9	127.8	121.7	115.8	109.9	104.3	98.81
20.0	153.3	146.5	139.7	132.6	125.6	118.6	111.9	105.3	99.02	92.84
22.5	154.1	146.4	138.8	130.9	123.2	115.4	108.0	100.5	93.57	86.65
25.0	154.7	146.3	137.6	129.1	120.4	112.0	103.8	95.60	87.99	80.43
27.5	154.9	145.6	136.2	126.8	117.5	108.2	99.35	90.42	82.25	74.12
30.0	154.7	144.6	134.6	124.3	114.3	104.3	94.68	85.19	76.37	67.66
32.5	154.2	143.5	132.5	121.6	110.9	100.1	89.89	79.80	70.40	61.22
35.0	153.5	141.9	130.3	118.5	107.1	95.78	84.93	74.30	64.36	54.66
37.5	152.3	140.0	127.7	115.3	103.3	91.32	79.81	68.66	58.20	48.10
40.0	150.7	137.9	124.9	111.9	99.16	86.59	74.62	62.95	52.06	41.56
42.5	149.0	135.5	121.8	108.2	94.90	81.80	69.31	57.19	45.92	35.09
45.0	146.9	132.7	118.5	104.3	90.36	76.87	63.90	51.34	39.80	28.71
47.5	144.4	129.7	114.9	100.2	85.86	71.70	58.37	45.50	33.67	22.45
50.0	141.7	126.4	111.1	95.73	81.05	66.46	52.84	39.69	27.65	16.38
52.5	138.7	122.8	107.2	91.37	76.10	61.20	47.25	33.91	21.72	10.66
55.0	135.4	119.1	102.9	86.63	71.07	55.88	41.65	28.19	16.01	5.423
57.5	131.9	115.1	98.43	81.91	65.96	50.48	36.13	22.53	10.56	1.152
60.0	128.0	110.9	93.89	76.95	60.73	45.07	30.65	17.03	5.566	0.5256
62.5	123.8	106.4	89.09	71.87	55.47	39.64	25.20	11.74	1.495	0.4304
65.0	119.6	101.7	84.20	66.69	50.13	34.30	19.86	6.802	0.4704	0.3441
67.5	115.0	96.90	79.19	61.48	44.79	28.96	14.66	2.616	0.3841	0.3173
70.0	110.3	91.99	73.99	56.23	39.50	23.71	9.638	0.5389	0.3516	0.3194
72.5	105.3	86.87	68.73	50.88	34.18	18.53	5.045	0.4534	0.3455	0.3215
75.0	100.3	81.60	63.40	45.51	28.91	13.46	1.429	0.3758	0.3444	0.3237
77.5	95.09	76.29	58.00	40.12	23.69	8.582	0.4751	0.3698	0.3530	0.3258
80.0	89.63	70.81	52.52	34.80	18.50	4.142	0.3936	0.3700	0.3621	0.3596
82.5	83.94	65.38	47.06	29.46	13.39	0.8799	0.3929	0.3703	0.3758	0.3756
85.0	77.84	59.57	41.60	24.14	8.447	0.4935	0.3922	0.3705	0.3893	0.4209
87.5	71.47	53.37	35.98	18.79	3.761	0.4666	0.3915	0.3708	0.4074	0.4345
90.0	65.01	47.17	30.04	13.42	0.5694	0.4483	0.3908	0.3710	0.4347	0.4662
92.5	58.58	40.99	24.26	7.969	0.4481	0.4256	0.3901	0.3756	0.4573	0.5025
95.0	52.29	35.10	18.58	1.850	0.4164	0.4039	0.3894	0.3813	0.4934	0.5251
97.5	46.03	29.18	11.29	0.4984	0.3802	0.3938	0.3941	0.3892	0.5208	0.5852
100.0	39.84	21.16	3.614	0.4483	0.3573	0.3757	0.4054	0.4253	0.5478	0.5917
102.5	31.27	13.05	0.4344	0.4076	0.3560	0.3757	0.4167	0.4480	0.5795	0.6111
105.0	22.48	3.477	0.3757	0.3757	0.3547	0.3757	0.4348	0.4979	0.6022	0.6449
107.5	13.70	0.4527	0.3484	0.3531	0.3541	0.3757	0.4575	0.5166	0.6292	0.6564
110.0	0.8754	0.3984	0.3177	0.3378	0.3565	0.3757	0.4934	0.5250	0.6473	0.6789
112.5	0.3663	0.3621	0.3190	0.3356	0.3622	0.3893	0.5117	0.5432	0.6609	0.7242
115.0	0.3294	0.3350	0.3203	0.3368	0.3831	0.4118	0.5342	0.5746	0.6881	0.7299
117.5	0.3247	0.3214	0.3215	0.3380	0.4075	0.4346	0.5525	0.5840	0.7018	0.7357
120.0	0.3199	0.3181	0.3341	0.3392	0.4394	0.4617	0.5841	0.6108	0.7289	0.7604
122.5	0.3152	0.3212	0.3486	0.3530	0.4663	0.5070	0.6066	0.6428	0.7515	0.7867
125.0	0.3178	0.3242	0.3667	0.3757	0.4890	0.5151	0.6292	0.6564	0.7652	0.8058
127.5	0.3216	0.3273	0.3941	0.3983	0.5114	0.5296	0.6518	0.6699	0.7788	0.8148
130.0	0.3396	0.3304	0.4210	0.4300	0.5296	0.5521	0.6566	0.6879	0.7900	0.8239
132.5	0.3855	0.3755	0.4483	0.4442	0.5415	0.5660	0.6765	0.7150	0.7956	0.8509
135.0	0.5524	0.5293	0.5342	0.4572	0.5523	0.5794	0.6848	0.7183	0.8011	0.8825
137.5	0.4255	0.4663	0.4753	0.4700	0.5704	0.5892	0.6926	0.7227	0.7967	0.8517
140.0	0.4211	0.4541	0.4889	0.5022	0.5840	0.6034	0.7018	0.7251	0.8059	0.8532
142.5	0.4436	0.4556	0.5116	0.5061	0.6076	0.6292	0.7153	0.7275	0.8117	0.8547
145.0	0.4665	0.4572	0.5343	0.5251	0.6219	0.6459	0.7243	0.7325	0.8152	0.8562
147.5	0.4891	0.4889	0.5658	0.5610	0.6383	0.6542	0.7334	0.7335	0.8187	0.8577
150.0	0.5116	0.5115	0.5885	0.5736	0.6565	0.6636	0.7470	0.7478	0.8312	0.8592
152.5	0.5434	0.5315	0.6204	0.5928	0.6792	0.6790	0.7652	0.7784	0.8468	0.8601
155.0	0.5617	0.5748	0.6430	0.6428	0.7198	0.7107	0.7999	0.8010	0.8698	0.8646
157.5	0.5976	0.5884	0.6612	0.6742	0.7424	0.7335	0.8146	0.8114	0.8725	0.8874
160.0	0.6292	0.6110	0.6926	0.6790	0.7605	0.7477	0.8284	0.8171	0.8713	0.8873
162.5	0.6564	0.6500	0.7152	0.7197	0.7741	0.7696	0.8284	0.8329	0.8690	0.8873
165.0	0.6745	0.6646	0.7334	0.7333	0.7862	0.7931	0.8284	0.8509	0.8668	0.8873
167.5	0.7018	0.6835	0.7515	0.7360	0.8013	0.7976	0.8284	0.8526	0.8646	0.8873
170.0	0.7288	0.7153	0.7741	0.7558	0.8108	0.8021	0.8284	0.8563	0.8623	0.8873
172.5	0.7588	0.7333	0.7922	0.7784	0.8120	0.8057	0.8284	0.8601	0.8609	0.8873
175.0	0.7744	0.7514	0.7985	0.7890	0.8132	0.8058	0.8284	0.8633	0.8605	0.8873
177.5	0.8013	0.7831	0.8069	0.7913	0.8144	0.8103	0.8284	0.8643	0.8602	0.8873
180.0	0.8058	0.7967	0.8058	0.8148	0.8148	0.8239	0.8284	0.8465	0.8601	0.8692

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: luominxian
Test Date: 2018-04-11

γ Range: 0 - 180DEG
γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
Humidity: 70%
Test Distance: 8.425m [K=1.0000]
Remarks: 壁灯

Photometric Data Table [cd]

G/C	300.0	305.0	310.0	315.0	320.0	325.0	330.0	335.0	340.0	345.0
0.0	135.3	135.3	135.6	135.4	135.7	135.5	135.8	135.5	135.7	135.4
2.5	130.0	129.2	128.8	128.0	127.6	127.0	126.8	126.1	125.8	125.3
5.0	124.6	122.9	121.8	120.5	119.5	118.2	117.5	116.5	116.0	115.1
7.5	118.8	116.4	114.6	112.5	111.1	109.3	108.2	106.8	105.9	104.8
10.0	112.8	109.8	107.3	104.6	102.6	100.3	98.76	96.98	95.88	94.53
12.5	106.7	103.0	99.78	96.59	93.95	91.21	89.29	87.11	85.67	84.17
15.0	100.3	95.89	92.21	88.38	85.30	82.10	79.69	77.22	75.62	73.84
17.5	93.83	88.77	84.48	80.03	76.52	72.89	70.26	67.44	65.55	63.58
20.0	87.20	81.51	76.68	71.78	67.78	63.82	60.74	57.67	55.55	53.43
22.5	80.40	74.23	68.84	63.51	59.13	54.75	51.33	47.99	45.60	43.39
25.0	73.60	66.91	61.02	55.24	50.42	45.68	42.00	38.43	35.95	33.56
27.5	66.72	59.50	53.19	46.97	41.78	36.79	32.87	29.09	26.49	24.04
30.0	59.79	52.14	45.37	38.78	33.32	28.11	24.00	20.17	17.46	15.00
32.5	52.85	44.71	37.60	30.72	25.07	19.76	15.57	11.74	9.105	6.785
35.0	45.86	37.38	29.97	22.94	17.18	11.84	7.830	4.345	1.635	0.7070
37.5	38.92	30.14	22.55	15.46	9.773	4.856	1.303	0.5164	0.4571	0.5116
40.0	32.08	23.13	15.48	8.559	3.384	0.5256	0.4345	0.4529	0.3842	0.4347
42.5	25.40	16.37	8.865	2.537	0.4842	0.4667	0.3619	0.3761	0.2987	0.3487
45.0	18.92	10.01	3.200	0.5297	0.4204	0.3899	0.3014	0.2991	0.2898	0.3112
47.5	12.72	4.377	0.5025	0.4663	0.3346	0.3172	0.2898	0.2852	0.3260	0.3167
50.0	6.996	0.5971	0.4346	0.3758	0.3013	0.2861	0.3213	0.2933	0.3535	0.3530
52.5	2.070	0.5075	0.3529	0.2943	0.3033	0.2881	0.3400	0.3257	0.3984	0.3801
55.0	0.4933	0.4212	0.2960	0.2898	0.3217	0.2942	0.3758	0.3667	0.4347	0.4225
57.5	0.4114	0.3221	0.2990	0.2916	0.3487	0.3436	0.4213	0.4235	0.4798	0.4527
60.0	0.3167	0.3105	0.3214	0.2988	0.3851	0.3711	0.4711	0.4526	0.5251	0.4979
62.5	0.3093	0.3079	0.3395	0.3394	0.4213	0.4255	0.5027	0.4969	0.5570	0.5384
65.0	0.3079	0.3054	0.3668	0.3620	0.4573	0.4616	0.5478	0.5341	0.6026	0.5793
67.5	0.3223	0.3092	0.4030	0.4028	0.5029	0.4979	0.5886	0.5750	0.6520	0.6333
70.0	0.3350	0.3483	0.4348	0.4480	0.5433	0.5430	0.6338	0.6336	0.6972	0.6697
72.5	0.3620	0.3672	0.4753	0.4975	0.5885	0.5926	0.6794	0.6743	0.7470	0.7195
75.0	0.3849	0.4114	0.5116	0.5250	0.6248	0.6426	0.7246	0.7170	0.7788	0.7649
77.5	0.4124	0.4435	0.5525	0.5704	0.6702	0.6745	0.7654	0.7648	0.8242	0.8057
80.0	0.4530	0.4933	0.5976	0.6110	0.7065	0.7152	0.8058	0.7967	0.8694	0.8554
82.5	0.4934	0.5250	0.6293	0.6519	0.7471	0.7514	0.8378	0.8642	0.9099	0.8827
85.0	0.5251	0.5612	0.6656	0.6833	0.7787	0.7993	0.8783	0.8762	0.9371	0.9369
87.5	0.5523	0.5839	0.6973	0.7107	0.8149	0.8149	0.9101	0.9144	0.9779	0.9595
90.0	0.5843	0.6291	0.7289	0.7514	0.8466	0.8600	0.9416	0.9371	1.010	0.9998
92.5	0.6247	0.6518	0.7650	0.7785	0.8827	0.8871	0.9733	0.9732	1.037	1.027
95.0	0.6475	0.6790	0.7922	0.8058	0.9054	0.9231	1.000	1.005	1.068	1.054
97.5	0.6836	0.7107	0.8195	0.8374	0.9282	0.9369	1.024	1.028	1.087	1.073
100.0	0.7018	0.7288	0.8420	0.8735	0.9598	0.9641	1.046	1.050	1.109	1.095
102.5	0.7334	0.7559	0.8647	0.8826	0.9733	0.9911	1.068	1.073	1.127	1.113
105.0	0.7560	0.7965	0.8829	0.9143	0.9978	1.005	1.087	1.086	1.145	1.145
107.5	0.7740	0.8005	0.9054	0.9384	1.018	1.019	1.100	1.100	1.164	1.159
110.0	0.7877	0.8148	0.9199	0.9452	1.028	1.041	1.118	1.114	1.181	1.159
112.5	0.8059	0.8330	0.9325	0.9506	1.050	1.050	1.129	1.123	1.189	1.168
115.0	0.8239	0.8690	0.9506	0.9612	1.057	1.069	1.145	1.150	1.198	1.181
117.5	0.8423	0.8692	0.9650	0.9748	1.065	1.080	1.153	1.150	1.203	1.191
120.0	0.8606	0.8870	0.9733	0.9927	1.073	1.083	1.159	1.157	1.207	1.199
122.5	0.8826	0.9035	0.9952	1.003	1.088	1.091	1.174	1.163	1.222	1.213
125.0	0.8918	0.9199	1.005	1.014	1.101	1.109	1.179	1.177	1.229	1.226
127.5	0.9081	0.9415	1.019	1.028	1.115	1.118	1.186	1.186	1.229	1.225
130.0	0.9250	0.9520	1.032	1.045	1.141	1.145	1.204	1.204	1.224	1.224
132.5	0.9365	0.9778	1.063	1.091	1.173	1.191	1.228	1.220	1.222	1.223
135.0	0.9458	1.009	1.072	1.141	1.177	1.209	1.211	1.167	1.167	1.186
137.5	0.9016	0.9462	0.9687	1.023	1.127	1.090	1.111	1.150	1.121	1.163
140.0	0.9041	0.9461	0.9687	1.018	1.077	1.084	1.099	1.141	1.115	1.157
142.5	0.9057	0.9528	0.9687	1.014	1.027	1.083	1.087	1.134	1.109	1.149
145.0	0.9073	0.9524	0.9687	1.010	1.014	1.077	1.073	1.120	1.096	1.141
147.5	0.9089	0.9445	0.9687	1.009	1.014	1.059	1.074	1.114	1.094	1.129
150.0	0.9170	0.9448	0.9687	1.005	1.014	1.058	1.070	1.102	1.092	1.120
152.5	0.9326	0.9452	0.9687	1.005	1.014	1.057	1.067	1.099	1.090	1.116
155.0	0.9362	0.9456	0.9687	1.005	1.014	1.056	1.055	1.096	1.087	1.114
157.5	0.9340	0.9460	0.9687	1.004	1.009	1.055	1.031	1.085	1.068	1.105
160.0	0.9349	0.9461	0.9687	1.002	0.9959	1.050	1.014	1.068	1.044	1.082
162.5	0.9365	0.9462	0.9552	0.9987	0.9868	1.032	0.9989	1.050	1.019	1.064
165.0	0.9232	0.9462	0.9530	0.9959	0.9705	1.009	0.9828	1.023	0.9868	1.037
167.5	0.9053	0.9463	0.9478	0.9841	0.9597	1.009	0.9732	1.007	0.9731	1.010
170.0	0.8965	0.9463	0.9426	0.9682	0.9461	0.9915	0.9552	0.9915	0.9506	0.9870
172.5	0.8850	0.9354	0.9144	0.9552	0.9325	0.9688	0.9280	0.9733	0.9369	0.9600
175.0	0.8784	0.9179	0.8900	0.9326	0.8918	0.9373	0.9053	0.9416	0.8963	0.9280
177.5	0.8750	0.8991	0.8759	0.9054	0.8691	0.9054	0.8773	0.9099	0.8718	0.9054
180.0	0.8737	0.8737	0.8737	0.8691	0.8601	0.8692	0.8646	0.8646	0.8556	0.8510

C Range: 0 - 360DEG
C Interval: 5.0DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: luominxian
Test Date: 2018-04-11

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
Humidity: 70%
Test Distance: 8.425m [K=1.0000]
Remarks: 壁灯


Photometric Data Table [cd]

G/C	350.0	355.0
0.0	135.5	135.0
2.5	125.3	124.7
5.0	114.9	114.3
7.5	104.4	103.7
10.0	93.98	93.14
12.5	83.48	82.64
15.0	72.99	72.09
17.5	62.63	61.66
20.0	52.36	51.29
22.5	42.22	41.13
25.0	32.29	31.16
27.5	22.75	21.56
30.0	13.66	12.53
32.5	5.567	4.527
35.0	0.5567	0.6203
37.5	0.4973	0.5524
40.0	0.4251	0.4623
42.5	0.3530	0.3985
45.0	0.3668	0.4002
47.5	0.3984	0.4391
50.0	0.4210	0.4527
52.5	0.4527	0.4663
55.0	0.4889	0.4981
57.5	0.5251	0.5100
60.0	0.5614	0.5381
62.5	0.5931	0.5705
65.0	0.6339	0.5973
67.5	0.6792	0.6383
70.0	0.7243	0.6923
72.5	0.7787	0.7333
75.0	0.8105	0.7784
77.5	0.8603	0.8237
80.0	0.9008	0.8600
82.5	0.9372	0.9054
85.0	0.9779	0.9415
87.5	1.010	0.9868
90.0	1.050	1.014
92.5	1.077	1.046
95.0	1.100	1.082
97.5	1.118	1.096
100.0	1.145	1.118
102.5	1.168	1.155
105.0	1.186	1.161
107.5	1.195	1.168
110.0	1.213	1.177
112.5	1.218	1.186
115.0	1.219	1.213
117.5	1.221	1.222
120.0	1.223	1.230
122.5	1.224	1.230
125.0	1.226	1.231
127.5	1.213	1.231
130.0	1.190	1.231
132.5	1.163	1.200
135.0	1.155	1.183
137.5	1.151	1.170
140.0	1.139	1.158
142.5	1.136	1.153
145.0	1.105	1.146
147.5	1.093	1.123
150.0	1.089	1.116
152.5	1.086	1.111
155.0	1.084	1.109
157.5	1.077	1.096
160.0	1.046	1.077
162.5	1.023	1.059
165.0	1.005	1.037
167.5	0.9686	1.005
170.0	0.9542	0.9869
172.5	0.9370	0.9599
175.0	0.8737	0.9147
177.5	0.8601	0.8782
180.0	0.8465	0.8284

C Range: 0 - 360DEG
 C Interval: 5.0DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: luominxian
 Test Date: 2018-04-11


γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.272
 Humidity: 70%
 Test Distance: 8.425m [K=1.0000]
 Remarks: 壁灯

I(cd)

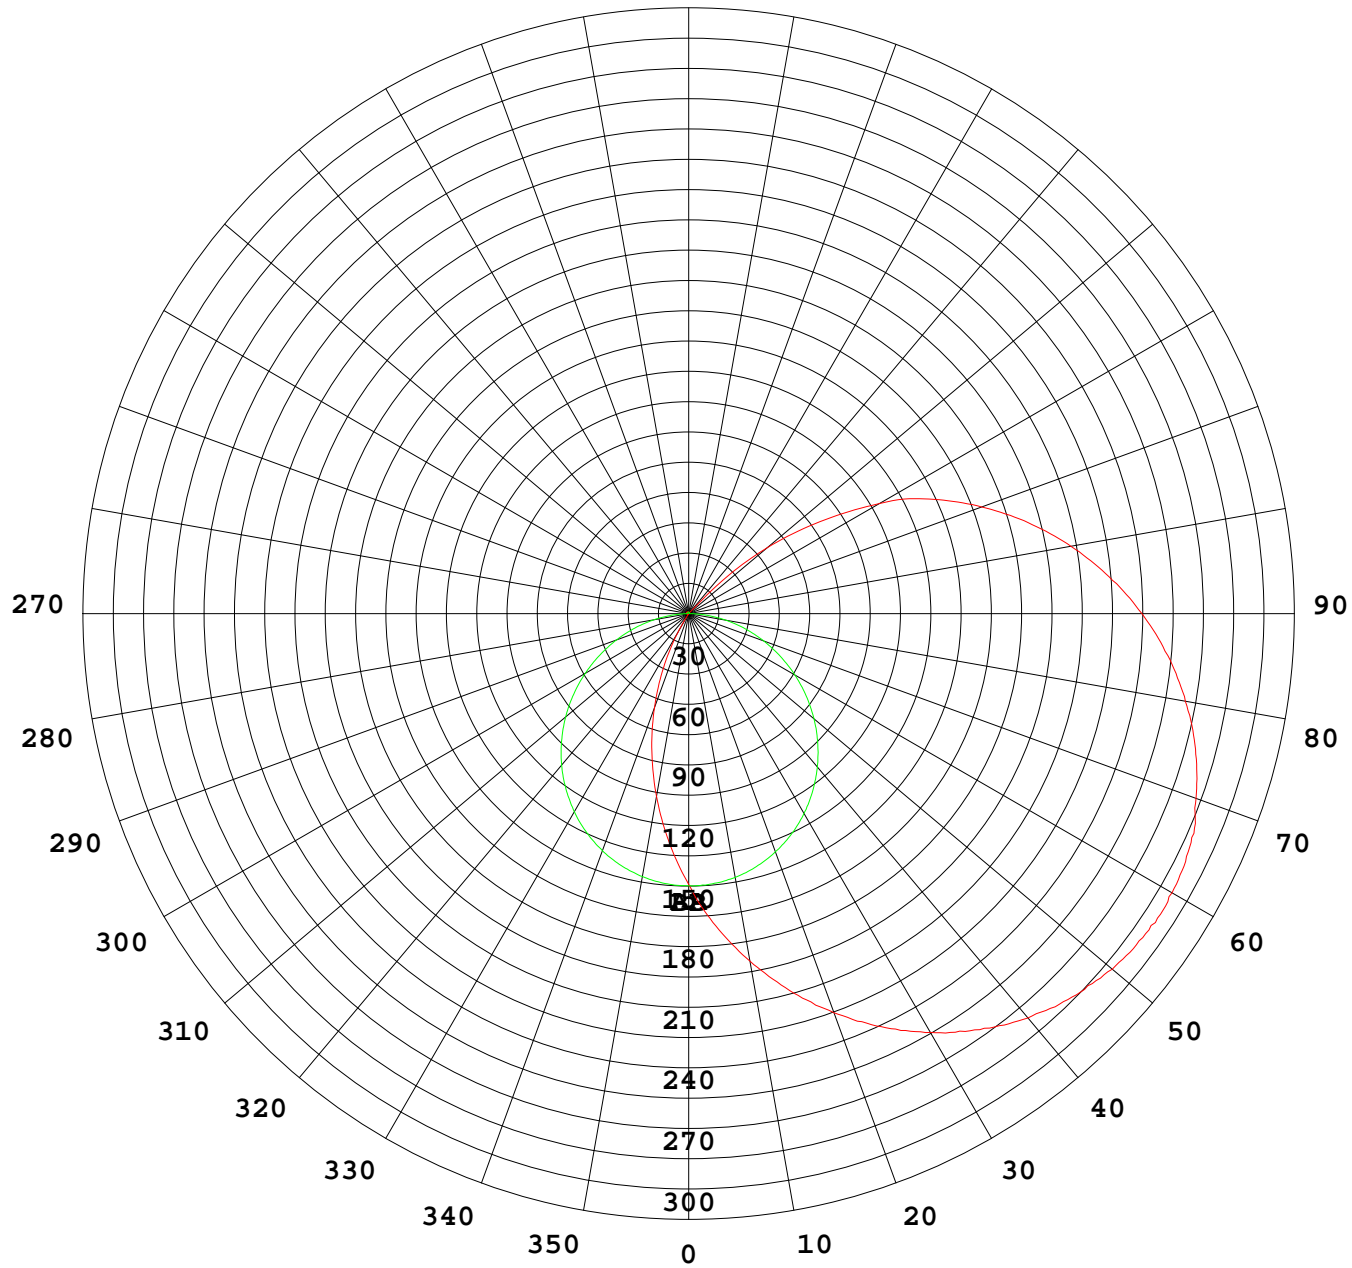

1000 lm

$K = 1$

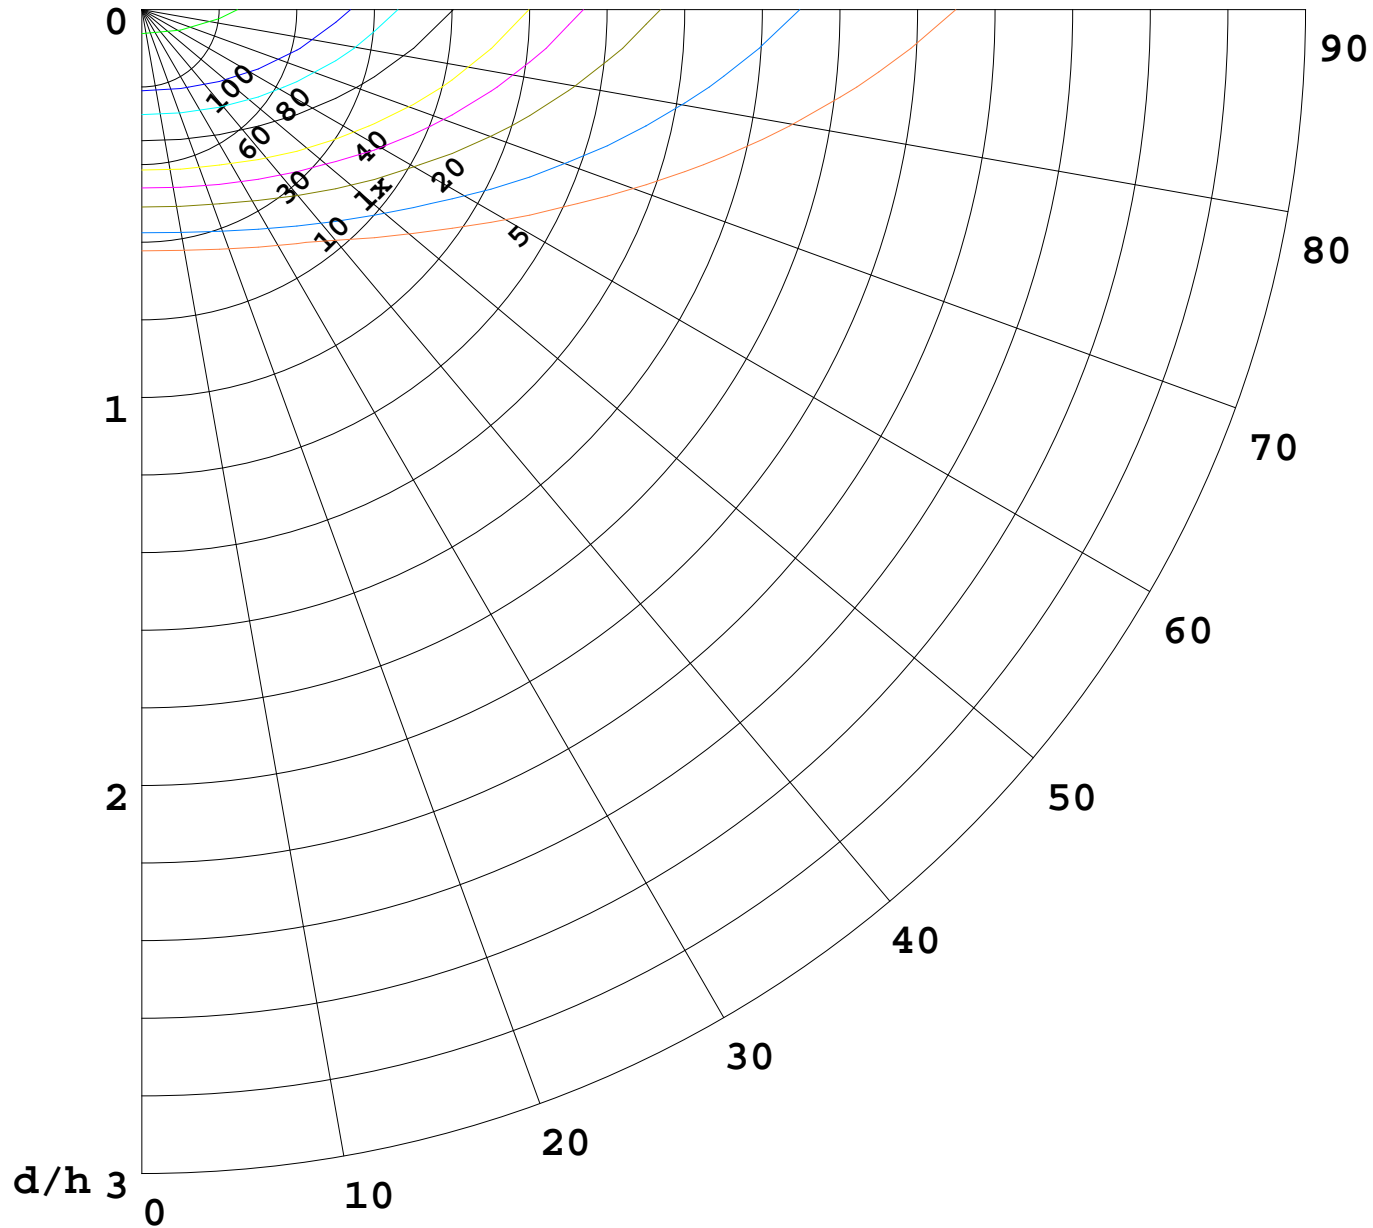

F = 5000 lm
K = 0.7
Hcc = 0.0 m
Hfc = 0.0 m
Eave = 100 lx

	Pcc	Pw	Pfc
—————	70	50	30
—————	50	30	20

