
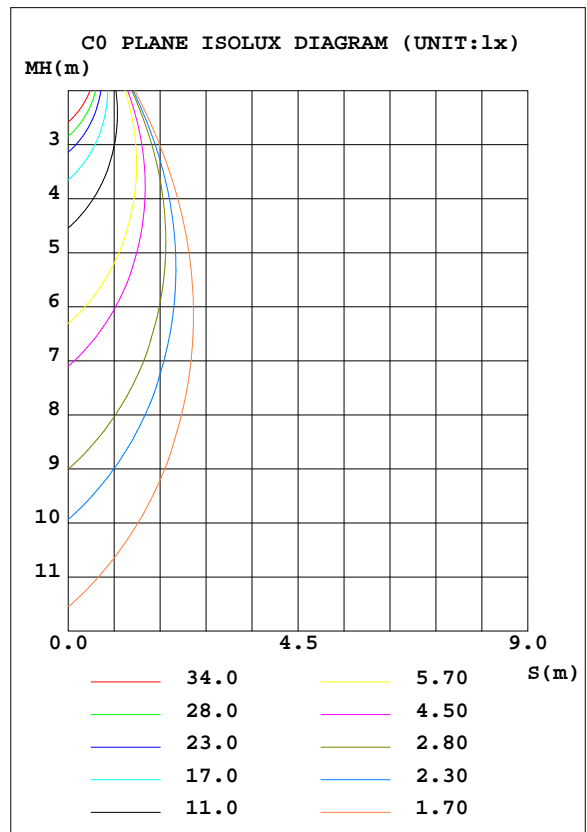


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 34.55 lm/W			
MODEL	大号	I <sub>max</sub> (cd)	445.7	S/MH(C0/180)	0.54
NOMINAL POWER(W)	36	LOR(%)	100.0	S/MH(C90/270)	1.26
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1273.7	η UP, DN(C0-180)	9.5, 38.7
NOMINAL FLUX(lm)	1273.66	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	10.6, 41.3
LAMPS INSIDE	1	η up(%)	20.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120.4	η down(%)	80.0	CIBSE SHR MAX	1.35

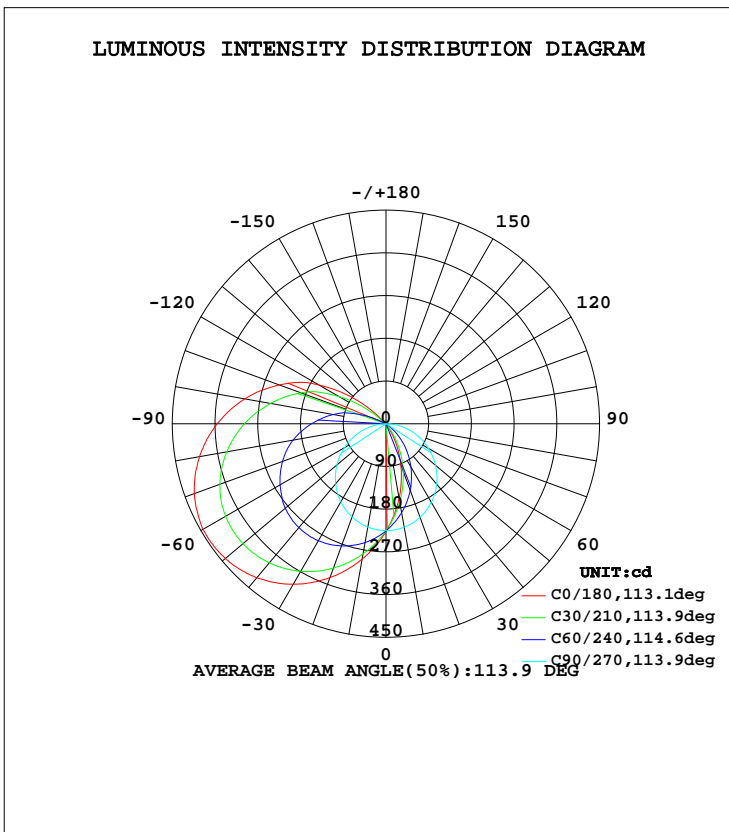


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

ZONAL FLUX DIAGRAM  
AND LUMINANCE LIMITATION CURVES

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	ℓlum,lamp
5	193.7	201.1	224.2	248.9	258.8	246.3	224.1	203.4	0- 5	5.384	5.384	0.42,0.42
10	159.6	176.5	221.2	269.4	289.1	266.4	220.9	178.2	5- 10	16.01	21.39	1.68,1.68
15	124.9	150.9	216.4	287.4	318.2	285.6	216.0	152.3	10- 15	26.19	47.58	3.74,3.74
20	91.63	124.9	209.7	303.4	344.6	301.9	209.1	125.3	15- 20	35.66	83.24	6.54,6.54
25	59.53	98.69	201.2	316.9	369.1	315.1	200.6	98.99	20- 25	44.17	127.4	10,10
30	29.07	72.83	191.0	327.6	390.7	325.8	190.1	72.89	25- 30	51.54	179.0	14.1,14.1
35	1.233	47.69	179.4	336.1	408.3	334.1	178.2	47.44	30- 35	57.62	236.6	18.6,18.6
40	0.7017	23.82	166.1	341.4	423.3	339.2	164.9	23.54	35- 40	62.68	299.2	23.5,23.5
45	0.5377	1.368	151.9	344.0	434.2	342.0	150.4	1.258	40- 45	67.46	366.7	28.8,28.8
50	0.6246	0.7786	136.4	343.0	441.5	341.3	134.9	0.6021	45- 50	71.52	438.2	34.4,34.4
55	0.7741	0.6385	120.1	339.2	444.7	337.5	118.4	0.4550	50- 55	74.58	512.8	40.3,40.3
60	0.9233	0.6926	103.1	332.8	444.7	331.3	101.1	0.5024	55- 60	76.51	589.3	46.3,46.3
65	1.082	0.7789	85.59	323.8	438.6	322.4	83.44	0.6154	60- 65	77.20	666.5	52.3,52.3
70	1.236	0.9144	67.88	311.5	429.6	310.4	65.69	0.7559	65- 70	76.59	743.1	58.3,58.3
75	1.385	1.046	50.19	295.8	416.1	295.5	47.89	0.8917	70- 75	74.68	817.8	64.2,64.2
80	1.521	1.159	32.70	277.4	398.7	276.8	30.32	1.023	75- 80	71.50	889.3	69.8,69.8
85	1.625	1.277	15.76	255.4	378.7	256.8	13.41	1.150	80- 85	67.19	956.5	75.1,75.1
90	1.729	1.372	1.280	233.6	356.0	234.9	0.8238	1.263	85- 90	61.92	1018	80,80
95	1.806	1.458	1.136	210.5	330.1	211.4	0.7061	1.372	90- 95	55.93	1074	84.3,84.3
100	1.883	1.539	0.9872	186.3	302.2	187.3	0.6017	1.449	95-100	49.40	1124	88.2,88.2
105	1.915	1.598	0.8510	161.4	272.0	162.0	0.6000	1.516	100-105	42.44	1166	91.6,91.6
110	1.969	1.639	0.7651	134.2	239.4	134.4	0.6220	1.557	105-110	35.17	1201	94.3,94.3
115	2.001	1.655	0.7260	95.73	206.4	95.82	0.6928	1.596	110-115	27.78	1229	96.5,96.5
120	1.924	1.661	0.7739	57.53	164.0	57.63	0.7697	1.619	115-120	20.17	1249	98.1,98.1
125	1.889	1.672	0.8374	2.474	117.0	2.443	0.8693	1.661	120-125	12.89	1262	99.1,99.1
130	1.870	1.675	0.9007	1.226	69.97	0.7149	0.9192	1.720	125-130	6.833	1269	99.6,99.6
135	1.833	1.668	0.9596	1.213	4.107	0.9063	0.9869	1.856	130-135	2.140	1271	99.8,99.8
140	1.856	1.670	1.018	1.036	0.7153	0.7108	1.065	1.774	135-140	0.4793	1272	99.8,99.8
145	1.892	1.707	1.104	1.014	0.7825	0.6919	1.272	1.856	140-145	0.4451	1272	99.9,99.9
150	1.814	1.652	1.299	1.091	0.5928	0.8057	1.359	1.802	145-150	0.3939	1272	99.9,99.9
155	1.809	1.648	1.486	1.182	0.5641	0.9186	1.471	1.720	150-155	0.3480	1273	99.9,99.9
160	1.779	1.738	1.521	1.299	0.5749	1.046	1.539	1.847	155-160	0.3004	1273	100,100
165	1.692	1.687	1.565	1.394	0.6611	1.181	1.593	1.903	160-165	0.2435	1273	100,100
170	1.535	1.620	1.593	1.489	0.7426	1.290	1.616	1.910	165-170	0.1795	1274	100,100
175	1.381	1.557	1.623	1.580	0.8963	1.403	1.625	1.815	170-175	0.1099	1274	100,100
180	1.254	1.521	1.621	1.675	1.014	1.521	1.621	1.689	175-180	0.0371	1274	100,100
DEG	LUMINOUS INTENSITY:cd MAX (Ii - Iavg)/Iavg (0-135) = 226.5 %										UNIT:lm	

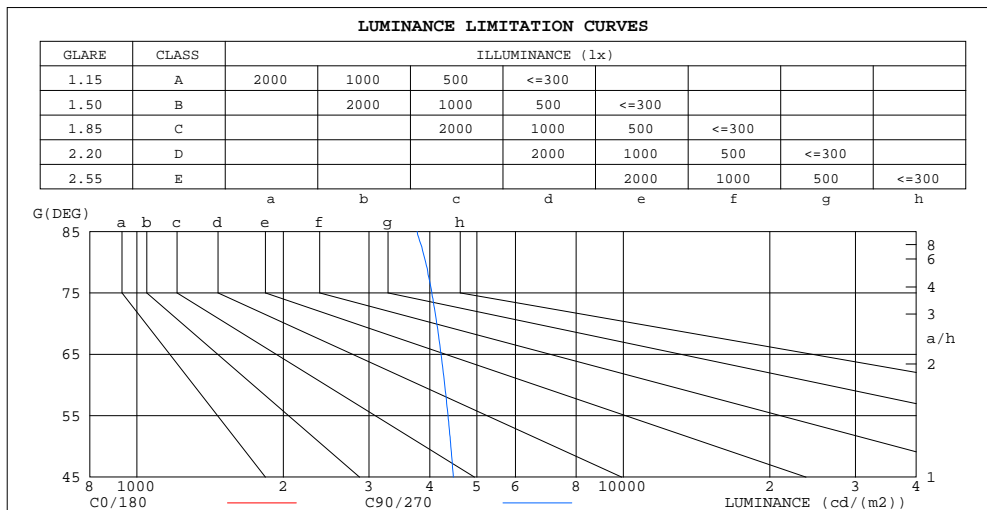

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	388	3768
80	182	3923
75	111	4040
70	75	4134
65	53	4219
60	38	4294
55	28	4361
50	20	4420
45	16	4474


C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature:25DEG  
Operators:luominxian  
Test Date:2018-04-11

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
Humidity:70%  
Test Distance:8.425m [K=1.0000]  
Remarks: 壁灯

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

pcc	80%			70%			50%			30%			10%			0
	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pw																
pfc																
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.14	1.14	1.14	1.09	1.09	1.09	.00	.00	.00	.91	.91	.91	.84	.84	.84	.80
1.0	.93	.87	.82	.89	.83	.78	.81	.76	.72	.73	.70	.66	.66	.64	.61	.57
2.0	.79	.70	.63	.75	.67	.61	.68	.62	.56	.62	.56	.52	.56	.52	.48	.44
3.0	.68	.58	.51	.65	.56	.49	.59	.51	.45	.53	.47	.42	.48	.43	.39	.35
4.0	.59	.49	.42	.56	.47	.40	.51	.44	.38	.46	.40	.35	.42	.37	.32	.29
5.0	.52	.42	.35	.50	.41	.34	.45	.38	.32	.41	.35	.30	.37	.32	.27	.25
6.0	.47	.37	.30	.45	.36	.29	.41	.33	.27	.37	.31	.25	.34	.28	.24	.21
7.0	.42	.33	.26	.40	.32	.25	.37	.29	.24	.34	.27	.22	.31	.25	.21	.18
8.0	.38	.29	.23	.37	.28	.22	.34	.26	.21	.31	.24	.20	.28	.23	.18	.16
9.0	.35	.26	.20	.33	.25	.20	.31	.24	.19	.28	.22	.18	.26	.20	.16	.14
10.0	.32	.24	.18	.31	.23	.18	.28	.22	.17	.26	.20	.16	.24	.19	.15	.13

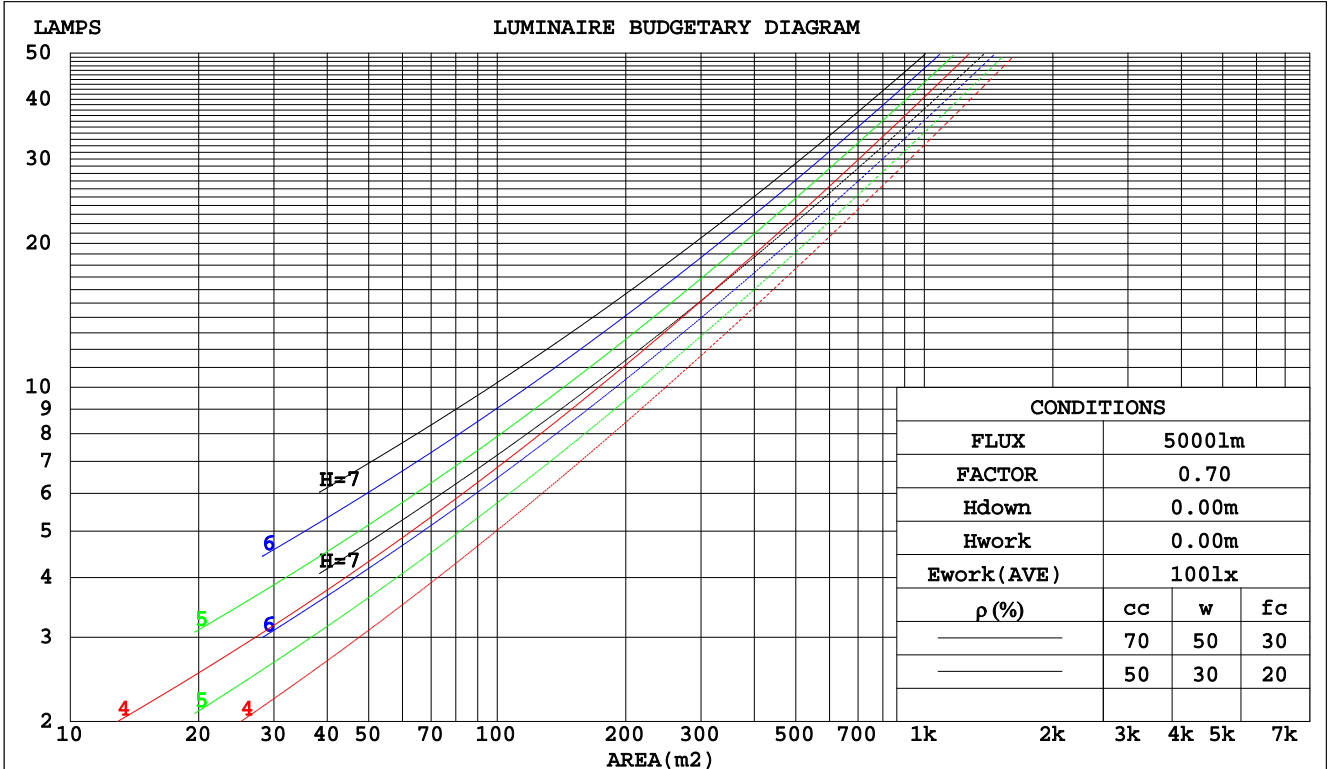

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

## WEC AND CCEC

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.426	.242	.077	.412	.235	.075	.387	.222	.071	.364	.210	.067	.343	.199	.064	
2.0	.359	.196	.060	.346	.191	.059	.324	.180	.056	.302	.170	.053	.283	.160	.050	
3.0	.313	.167	.050	.302	.162	.049	.282	.153	.046	.263	.144	.044	.245	.136	.042	
4.0	.279	.145	.043	.269	.141	.042	.250	.133	.040	.233	.125	.038	.217	.118	.036	
5.0	.252	.128	.037	.243	.125	.036	.226	.117	.035	.210	.111	.033	.195	.104	.031	
6.0	.229	.115	.033	.221	.112	.032	.205	.105	.031	.191	.099	.029	.177	.093	.028	
7.0	.210	.104	.029	.203	.101	.029	.189	.095	.027	.175	.090	.026	.163	.085	.025	
8.0	.194	.095	.027	.188	.092	.026	.174	.087	.025	.162	.082	.024	.151	.077	.023	
9.0	.181	.087	.024	.174	.085	.024	.162	.080	.023	.151	.076	.022	.140	.071	.021	
10.0	.169	.081	.022	.163	.079	.022	.152	.074	.021	.141	.070	.020	.131	.066	.019	

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.343	.343	.343	.293	.293	.293	.200	.200	.200	.115	.115	.115	.037	.037	.037	
1.0	.342	.309	.279	.293	.265	.240	.200	.182	.166	.115	.106	.097	.037	.034	.031	
2.0	.336	.287	.245	.288	.247	.212	.197	.171	.148	.114	.099	.087	.037	.032	.028	
3.0	.329	.270	.224	.282	.233	.194	.193	.162	.136	.112	.095	.080	.036	.031	.026	
4.0	.321	.258	.210	.275	.223	.183	.189	.155	.129	.109	.091	.076	.035	.030	.025	
5.0	.313	.249	.201	.269	.215	.175	.185	.150	.124	.107	.088	.073	.035	.029	.024	
6.0	.305	.241	.194	.262	.208	.169	.181	.146	.120	.105	.086	.071	.034	.028	.024	
7.0	.298	.234	.190	.256	.203	.165	.177	.142	.117	.103	.084	.070	.033	.027	.023	
8.0	.291	.229	.186	.250	.198	.162	.173	.139	.115	.101	.082	.068	.033	.027	.023	
9.0	.284	.224	.183	.245	.194	.160	.170	.137	.113	.099	.081	.068	.032	.026	.022	
10.0	.278	.220	.181	.240	.191	.158	.166	.134	.112	.097	.079	.067	.031	.026	.022	

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

## Uncorrected UGR Table

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm										
NAME: 壁灯					TYPE:			WEIGHT:		
DIM.:					SPEC.:			SERIAL No.:201800411-02		
MFR.: Target					SUR.:			PROTECTION ANGLE:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	-10.0	-8.6	-9.4	-8.0	-7.4	10.4	11.8	10.9	12.3	12.9
3H	-9.4	-8.1	-8.8	-7.5	-6.9	11.9	13.2	12.5	13.8	14.4
4H	-8.5	-7.3	-7.9	-6.7	-6.0	12.5	13.8	13.1	14.4	15.1
6H	-7.0	-5.8	-6.4	-5.2	-4.5	13.1	14.3	13.7	14.9	15.6
8H	-5.9	-4.8	-5.3	-4.2	-3.5	13.3	14.4	13.9	15.0	15.7
12H	-4.6	-3.5	-4.0	-2.9	-2.2	13.5	14.5	14.1	15.2	15.9
4H 2H	-9.3	-8.1	-8.7	-7.5	-6.8	9.9	11.2	10.5	11.7	12.4
3H	-8.6	-7.6	-8.0	-6.9	-6.2	11.4	12.5	12.1	13.2	13.9
4H	-7.6	-6.6	-6.9	-5.9	-5.2	12.1	13.1	12.7	13.8	14.5
6H	-5.8	-4.9	-5.1	-4.2	-3.4	12.6	13.5	13.3	14.2	15.0
8H	-4.6	-3.7	-3.9	-3.0	-2.2	12.8	13.7	13.5	14.4	15.2
12H	-3.1	-2.3	-2.4	-1.6	-0.8	13.0	13.8	13.7	14.5	15.3
8H 4H	-7.4	-6.5	-6.7	-5.8	-5.0	11.9	12.7	12.6	13.4	14.2
6H	-5.2	-4.4	-4.4	-3.7	-2.9	12.4	13.1	13.1	13.9	14.7
8H	-3.7	-3.0	-2.9	-2.3	-1.4	12.6	13.3	13.4	14.0	14.9
12H	-1.8	-1.3	-1.1	-0.5	0.4	12.8	13.4	13.6	14.1	15.0
12H 4H	-7.3	-6.5	-6.6	-5.8	-5.0	11.8	12.6	12.5	13.3	14.1
6H	-5.0	-4.3	-4.3	-3.6	-2.7	12.3	13.0	13.1	13.7	14.6
8H	-3.3	-2.8	-2.6	-2.0	-1.1	12.6	13.1	13.3	13.9	14.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 2.5 / - 3.9				
1.5H	+ 0.2 / - 0.3					+ 3.9 / -13.4				
2.0H	+ 0.3 / - 0.4					+ 4.9 / -18.0				

CIE Pub.117 Corrected 1274 lm Total Lamp Luminous Flux.(8log(F/F0) = 0.8)

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

## UTILIZATION FACTORS TABLE

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	45	32	24	44	31	24	42	31	24	17
0.80	53	40	31	52	39	31	49	38	30	22
1.00	61	47	38	59	46	38	55	47	37	28
1.25	68	54	45	65	53	44	61	50	43	33
1.50	73	60	50	70	58	49	65	55	47	37
2.00	80	68	59	77	66	58	71	62	55	43
2.50	85	74	65	82	71	63	75	67	60	47
3.00	89	79	70	85	76	68	78	71	64	50
4.00	94	85	78	90	82	75	83	76	71	55
5.00	97	90	83	93	86	80	85	80	75	59
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

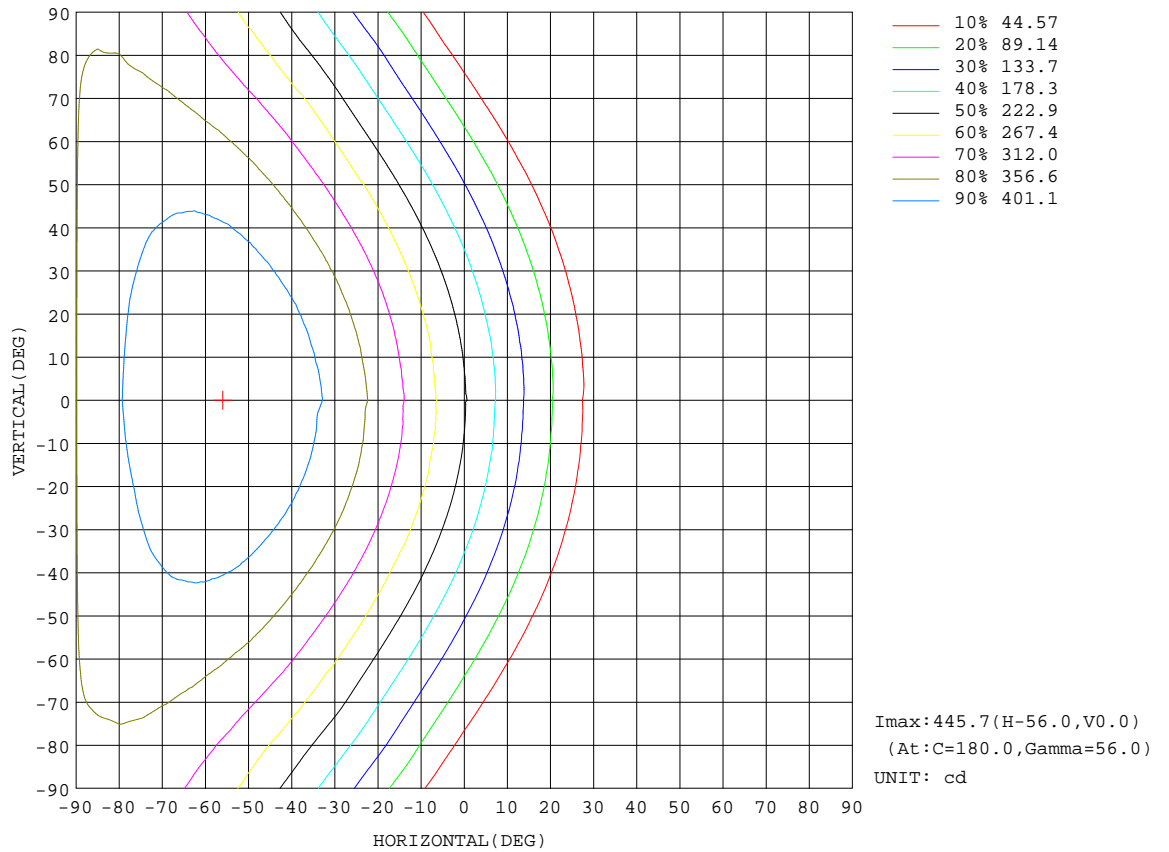


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯

AAI Figure

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

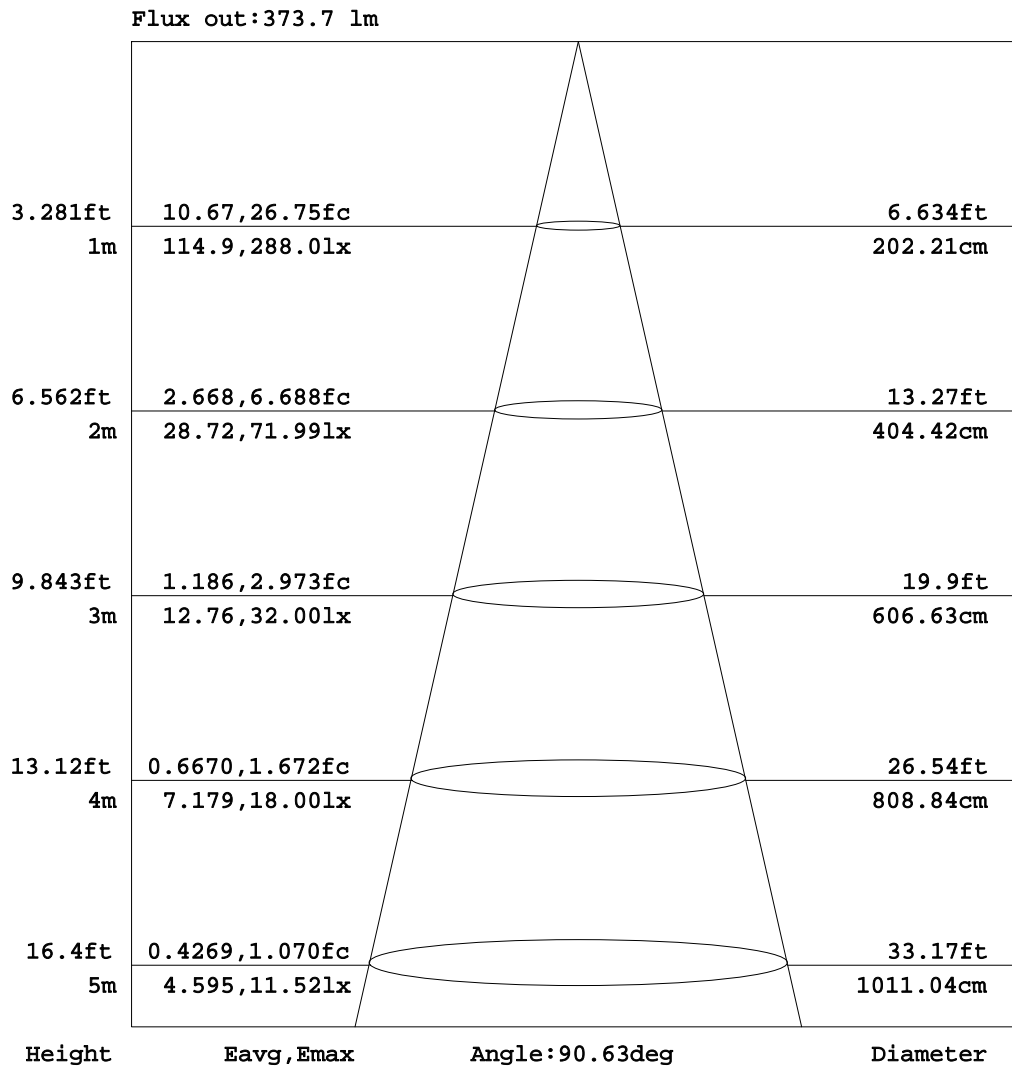

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯



ISOLUX DIAGRAM


Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

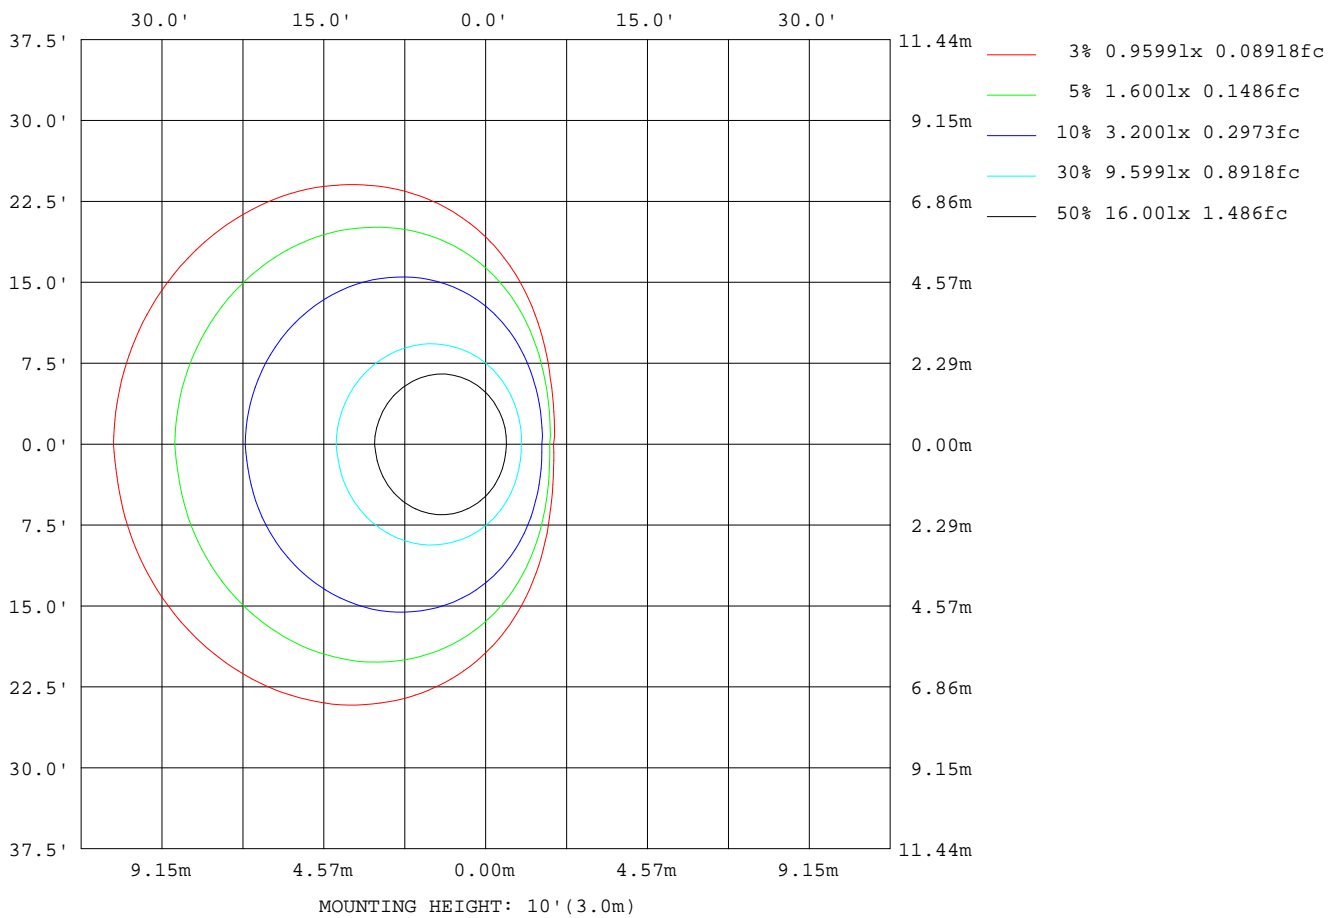

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

Planar Illuminance Curve

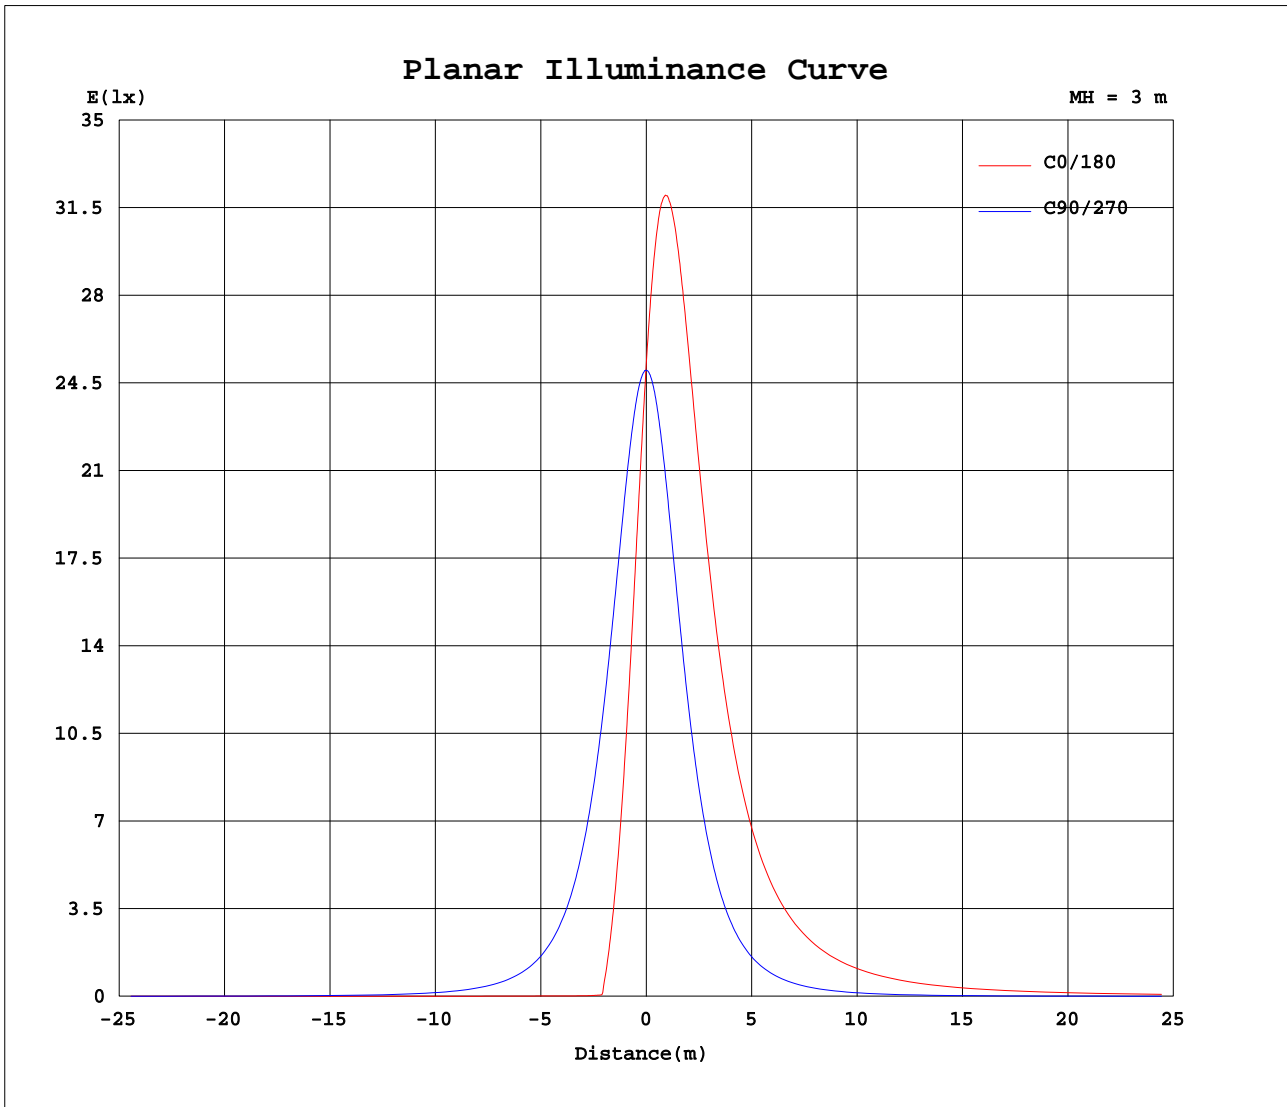

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
0	227	226	226	225	225	225	225	224	225	224	225	225	226	225	225	225	225	225	225
5	194	193	193	193	194	195	197	198	200	201	204	205	209	210	213	216	218	221	224
10	160	159	160	161	162	164	167	169	173	176	181	185	190	194	199	205	210	216	221
15	125	126	126	128	130	133	137	141	146	151	157	163	170	177	184	192	200	208	216
20	91.6	92.5	93.2	95.7	98.2	102	106	112	118	125	132	140	150	158	168	178	188	199	210
25	59.5	60.5	61.7	64.5	67.6	72.3	77.1	83.6	90.3	98.7	107	117	127	139	150	162	175	188	201
30	29.1	30.2	31.6	34.8	38.2	43.3	48.8	56.0	63.5	72.8	82.4	93.6	105	118	131	146	160	176	191
35	1.23	1.58	2.38	6.96	11.0	16.3	22.0	29.6	37.7	47.7	58.1	70.3	83.0	97.3	112	128	144	162	179
40	0.70	0.68	0.75	0.76	0.85	0.88	0.97	4.33	13.7	23.8	34.7	47.5	61.0	76.3	92.2	110	128	147	166
45	0.54	0.55	0.56	0.58	0.61	0.63	0.74	0.78	0.93	1.37	12.9	25.8	39.7	55.5	72.3	90.9	110	131	152
50	0.62	0.66	0.61	0.65	0.60	0.63	0.61	0.61	0.69	0.78	0.96	5.54	19.5	35.5	52.7	71.9	92.2	114	136
55	0.77	0.80	0.76	0.78	0.72	0.73	0.66	0.67	0.63	0.64	0.71	0.86	1.20	16.5	33.5	53.0	73.8	96.6	120
60	0.92	0.95	0.91	0.93	0.87	0.88	0.80	0.77	0.68	0.69	0.65	0.67	0.84	1.04	15.6	34.6	55.6	78.9	103
65	1.08	1.10	1.07	1.08	1.03	1.03	0.95	0.92	0.81	0.78	0.69	0.70	0.70	0.79	1.11	17.3	37.6	60.9	85.6
70	1.24	1.25	1.22	1.23	1.17	1.17	1.09	1.07	0.95	0.91	0.78	0.76	0.70	0.74	0.83	1.80	20.5	43.2	67.9
75	1.38	1.40	1.36	1.37	1.31	1.30	1.22	1.20	1.10	1.05	0.91	0.85	0.73	0.75	0.79	0.87	5.10	25.9	50.2
80	1.52	1.53	1.49	1.50	1.43	1.42	1.34	1.31	1.21	1.16	1.03	0.96	0.81	0.78	0.79	0.83	1.01	9.79	32.7
85	1.63	1.64	1.61	1.62	1.55	1.54	1.45	1.42	1.33	1.28	1.14	1.07	0.92	0.84	0.79	0.83	0.97	1.12	15.8
90	1.73	1.74	1.72	1.72	1.66	1.65	1.57	1.53	1.43	1.37	1.24	1.18	1.03	0.94	0.80	0.83	0.93	1.04	1.28
95	1.81	1.83	1.80	1.79	1.73	1.72	1.64	1.61	1.52	1.46	1.33	1.27	1.14	1.04	0.88	0.83	0.89	0.96	1.14
100	1.88	1.89	1.87	1.86	1.81	1.78	1.70	1.68	1.59	1.54	1.41	1.35	1.22	1.13	0.98	0.88	0.84	0.87	0.99
105	1.91	1.94	1.91	1.91	1.86	1.83	1.76	1.73	1.63	1.60	1.48	1.40	1.28	1.20	1.05	0.97	0.83	0.80	0.85
110	1.97	1.97	1.95	1.94	1.90	1.87	1.80	1.76	1.67	1.64	1.53	1.46	1.33	1.26	1.11	1.04	0.90	0.81	0.77
115	2.00	1.95	1.95	1.95	1.90	1.88	1.82	1.76	1.70	1.66	1.55	1.48	1.37	1.30	1.43	1.10	0.96	0.87	0.73
120	1.92	1.91	1.95	1.92	1.90	1.87	1.81	1.75	1.70	1.66	1.57	1.51	1.40	1.34	1.23	1.14	1.00	0.92	0.77
125	1.89	1.88	1.92	1.89	1.89	1.83	1.81	1.75	1.70	1.67	1.59	1.53	1.44	1.38	1.25	1.19	1.06	0.99	0.84
130	1.87	1.86	1.89	1.87	1.86	1.81	1.80	1.73	1.72	1.67	1.61	1.55	1.46	1.40	1.31	1.23	1.10	1.04	0.90
135	1.83	1.82	1.84	1.83	1.82	1.80	1.77	1.73	1.71	1.67	1.63	1.55	1.48	1.42	1.31	1.27	1.14	1.08	0.96
140	1.86	1.89	2.04	2.14	1.87	1.83	1.82	1.81	1.71	1.67	1.64	1.56	1.48	1.44	1.36	1.31	1.17	1.13	1.02
145	1.89	1.99	2.08	1.80	1.82	1.79	1.80	1.75	1.75	1.71	1.65	1.60	1.54	1.50	1.42	1.37	1.25	1.22	1.10
150	1.81	1.91	1.87	1.76	1.77	1.73	1.74	1.70	1.70	1.65	1.64	1.60	1.57	1.54	1.48	1.47	1.40	1.40	1.30
155	1.81	1.82	1.74	1.73	1.73	1.69	1.70	1.67	1.67	1.65	1.63	1.63	1.75	1.67	1.62	1.60	1.56	1.56	1.49
160	1.78	1.72	1.70	1.67	1.68	1.66	1.68	1.65	1.67	1.74	1.74	1.67	1.67	1.63	1.62	1.62	1.60	1.58	1.52
165	1.69	1.60	1.62	1.60	1.63	1.60	1.62	1.67	1.70	1.69	1.68	1.64	1.65	1.62	1.62	1.62	1.60	1.61	1.57
170	1.54	1.47	1.50	1.48	1.50	1.54	1.62	1.63	1.66	1.62	1.63	1.60	1.61	1.59	1.62	1.63	1.61	1.63	1.59
175	1.38	1.35	1.38	1.39	1.48	1.53	1.57	1.55	1.58	1.56	1.57	1.54	1.57	1.57	1.60	1.62	1.65	1.62	1.62
180	1.25	1.25	1.30	1.42	1.47	1.46	1.49	1.50	1.52	1.52	1.53	1.53	1.55	1.55	1.59	1.61	1.62	1.62	1.62

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

C( DEG) γ (DEG)	95	100	105	110	115	120	125	130	135	140	145	150	155	160	165	170	175	180	185
0	225	225	225	226	227	226	227	226	227	226	227	226	227	226	227	226	226	227	226
5	227	230	233	236	239	241	245	246	249	250	252	254	256	256	257	257	258	259	257
10	227	233	238	244	250	254	260	264	269	274	277	280	282	285	286	288	288	289	289
15	225	233	241	250	259	265	274	281	287	294	299	304	308	311	313	316	316	318	318
20	221	232	243	253	265	276	285	295	303	312	319	325	330	335	338	341	342	345	344
25	215	228	242	255	269	282	294	306	317	327	336	344	351	356	360	364	365	369	368
30	207	223	239	254	271	286	301	315	328	340	351	361	369	375	381	384	386	391	389
35	197	215	234	252	271	288	305	321	336	350	363	374	383	391	397	401	404	408	407
40	186	206	227	247	267	288	307	325	341	357	371	384	394	403	410	415	418	423	421
45	174	196	218	240	262	285	306	325	344	361	377	390	402	412	420	425	429	434	433
50	160	183	207	231	255	279	302	323	343	362	378	393	407	418	426	432	435	441	439
55	145	170	195	220	245	271	295	318	339	359	377	393	407	419	428	435	439	445	443
60	129	155	181	208	234	261	286	310	333	354	373	389	405	417	427	433	438	445	442
65	112	139	166	194	221	249	276	300	324	345	365	383	398	410	421	428	432	439	436
70	94.6	122	150	178	207	236	261	287	312	333	354	371	387	400	410	418	423	430	427
75	76.9	105	133	162	191	220	245	272	296	318	338	357	372	386	396	404	409	416	413
80	59.1	86.8	116	145	173	201	227	253	277	299	320	339	355	368	379	387	392	399	396
85	41.3	68.9	97.2	125	152	180	206	232	255	279	300	318	335	349	359	367	372	379	376
90	23.3	49.2	76.4	104	131	159	184	210	234	257	278	296	312	326	337	344	349	356	353
95	1.56	30.3	56.8	83.1	110	136	162	188	211	233	253	272	288	301	312	319	324	330	327
100	1.04	1.37	32.5	62.4	89.2	114	139	164	186	209	228	246	261	275	285	292	297	302	300
105	0.86	0.99	1.12	32.1	61.0	89.8	116	140	161	183	201	219	233	246	255	263	267	272	270
110	0.74	0.84	0.94	1.12	29.1	56.5	83.2	109	134	156	173	190	204	217	225	232	236	239	239
115	0.69	0.74	0.79	1.07	1.11	19.2	48.4	72.5	95.7	117	138	156	172	185	193	200	203	206	206
120	0.69	0.68	0.71	0.91	1.07	1.12	1.26	33.7	57.5	77.6	96.7	113	128	140	149	157	160	164	163
125	0.77	0.67	0.70	0.87	0.97	1.11	1.14	1.32	2.47	34.3	54.4	69.9	84.2	94.8	104	110	114	117	116
130	0.84	0.73	0.77	0.89	1.00	1.05	1.16	1.23	1.23	1.28	1.27	10.5	35.4	47.5	57.2	62.6	66.5	70.0	68.8
135	0.91	0.83	0.88	1.01	1.06	1.11	1.08	1.14	1.21	1.25	1.24	1.22	1.23	1.23	1.21	1.21	1.41	4.11	1.82
140	1.00	0.96	1.01	1.19	1.20	1.13	1.06	1.05	1.04	1.10	1.17	1.28	1.29	1.22	1.20	1.14	1.10	0.72	0.73
145	1.09	1.06	1.13	1.27	1.27	1.16	1.10	1.01	1.01	1.00	1.00	1.02	1.02	1.08	1.08	1.13	1.08	0.78	0.86
150	1.25	1.23	1.26	1.33	1.30	1.22	1.16	1.09	1.09	1.02	1.03	0.98	0.97	0.94	0.92	0.91	0.87	0.59	0.70
155	1.45	1.39	1.40	1.40	1.32	1.24	1.24	1.17	1.18	1.11	1.12	1.06	1.06	1.00	1.00	0.93	0.93	0.56	0.72
160	1.52	1.47	1.47	1.41	1.41	1.36	1.34	1.29	1.30	1.23	1.23	1.16	1.17	1.11	1.11	1.04	1.02	0.57	0.80
165	1.58	1.52	1.53	1.50	1.48	1.44	1.44	1.38	1.39	1.34	1.34	1.29	1.30	1.24	1.24	1.19	1.16	0.66	0.88
170	1.60	1.57	1.58	1.55	1.56	1.52	1.53	1.48	1.49	1.44	1.44	1.40	1.41	1.38	1.37	1.30	1.28	0.74	0.97
175	1.62	1.62	1.63	1.61	1.63	1.59	1.60	1.58	1.58	1.53	1.54	1.52	1.51	1.48	1.48	1.42	1.41	0.90	1.09
180	1.64	1.65	1.66	1.67	1.67	1.66	1.68	1.67	1.67	1.67	1.67	1.64	1.65	1.62	1.62	1.58	1.55	1.01	1.25

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--3

UNIT: cd

C( DEG) γ (DEG)	190	195	200	205	210	215	220	225	230	235	240	245	250	255	260	265	270	275	280
0	226	225	225	225	225	224	225	224	225	225	226	225	225	225	225	225	225	225	225
5	257	256	255	253	252	250	249	246	245	242	241	237	235	232	229	227	224	221	219
10	287	286	284	281	278	276	271	266	263	258	254	248	243	237	232	226	221	215	210
15	315	313	310	307	302	297	292	286	279	273	265	256	249	240	232	224	216	208	200
20	341	339	334	330	323	317	310	302	293	284	274	263	252	241	231	220	209	198	188
25	365	361	356	350	343	334	325	315	304	293	281	267	254	240	227	214	201	187	174
30	385	381	375	368	359	349	338	326	313	299	285	268	253	237	221	206	190	175	160
35	403	397	391	383	372	361	348	334	319	303	286	268	250	232	214	196	178	161	144
40	417	411	404	394	383	370	355	339	322	304	286	265	245	225	205	185	165	145	127
45	428	421	413	402	389	375	359	342	323	303	282	260	238	216	194	172	150	129	109
50	434	428	418	407	393	377	360	341	320	299	277	252	229	205	181	158	135	112	90.8
55	438	430	420	408	393	377	358	337	316	293	268	243	218	193	168	142	118	94.6	72.3
60	437	428	418	405	390	372	353	331	308	284	258	232	205	179	153	126	101	76.6	53.9
65	431	422	412	399	383	365	344	322	298	273	246	218	191	164	136	109	83.4	58.5	35.8
70	421	412	402	388	372	354	334	310	287	260	232	204	176	147	120	91.8	65.7	40.7	18.6
75	408	399	388	374	358	339	318	296	271	245	217	188	159	130	102	74.0	47.9	23.4	3.74
80	391	382	371	357	341	321	300	277	251	227	199	171	142	113	84.1	56.1	30.3	7.50	0.70
85	371	362	351	337	320	301	280	257	231	206	178	151	123	94.5	66.0	38.2	13.4	0.78	0.69
90	348	340	329	314	298	279	257	235	209	184	157	129	102	74.0	46.9	20.5	0.82	0.74	0.68
95	323	315	304	290	274	255	233	211	187	162	135	108	81.3	54.1	28.1	0.91	0.71	0.68	0.67
100	295	288	277	264	247	229	209	187	163	139	113	87.0	61.1	30.3	0.83	0.69	0.60	0.65	0.71
105	265	259	248	236	220	203	183	162	139	115	89.8	59.5	31.1	0.74	0.59	0.59	0.60	0.65	0.78
110	234	228	218	206	191	175	156	134	109	82.3	56.1	27.9	0.75	0.66	0.56	0.56	0.62	0.69	0.88
115	202	196	186	174	158	139	119	95.8	73.0	47.7	20.4	0.65	0.65	0.54	0.56	0.57	0.69	0.80	0.95
120	159	153	142	129	115	97.4	79.0	57.6	34.8	0.83	0.62	0.65	0.56	0.54	0.59	0.62	0.77	0.86	1.01
125	113	106	97.8	85.6	72.2	55.3	36.6	2.44	0.67	0.65	0.70	0.57	0.60	0.58	0.68	0.72	0.87	0.94	1.09
130	66.1	59.3	50.8	37.8	17.5	0.80	0.72	0.71	0.85	0.77	0.66	0.60	0.67	0.66	0.75	0.79	0.92	1.00	1.14
135	0.92	0.80	0.78	0.84	0.91	0.89	0.96	0.91	0.78	0.74	0.75	0.72	0.82	0.76	0.84	0.85	0.99	1.07	1.19
140	0.76	0.77	0.85	0.88	0.91	0.87	0.71	0.71	0.69	0.73	0.78	0.81	0.91	0.91	1.01	1.06	1.07	1.08	1.20
145	0.79	0.78	0.71	0.73	0.71	0.72	0.71	0.69	0.77	0.78	0.87	0.91	1.01	1.00	1.10	1.14	1.27	1.37	1.51
150	0.68	0.68	0.70	0.72	0.76	0.73	0.79	0.81	0.88	0.88	0.98	1.00	1.09	1.10	1.20	1.24	1.36	1.43	1.54
155	0.75	0.72	0.79	0.79	0.86	0.86	0.91	0.92	0.99	1.00	1.08	1.11	1.20	1.22	1.33	1.36	1.47	1.53	1.61
160	0.87	0.86	0.91	0.90	0.97	0.97	1.04	1.05	1.11	1.11	1.21	1.23	1.31	1.33	1.42	1.45	1.54	1.59	1.65
165	1.01	1.00	1.05	1.04	1.10	1.10	1.17	1.18	1.25	1.25	1.33	1.34	1.41	1.42	1.50	1.53	1.59	1.61	1.67
170	1.12	1.14	1.19	1.17	1.24	1.23	1.29	1.29	1.34	1.34	1.41	1.42	1.48	1.48	1.55	1.56	1.62	1.62	1.67
175	1.23	1.29	1.34	1.33	1.38	1.36	1.41	1.40	1.44	1.43	1.48	1.49	1.55	1.55	1.60	1.60	1.63	1.62	1.67
180	1.29	1.41	1.45	1.46	1.48	1.48	1.51	1.52	1.53	1.52	1.53	1.55	1.59	1.60	1.62	1.62	1.62	1.65	1.65

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.3098A P:36.86W PF:0.9879 Lamp Flux:1273.66x1 lm		
NAME: 壁灯	TYPE:	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:201800411-02
MFR.: Target	SUR.:	PROTECTION ANGLE:

Table--4

UNIT: cd

C( DEG) γ (DEG)	285	290	295	300	305	310	315	320	325	330	335	340	345	350	355				
0	225	226	227	226	227	226	227	226	227	226	227	226	227	226	226				
5	216	214	212	209	207	204	203	201	200	198	197	195	195	194	194				
10	205	200	196	190	187	182	178	174	171	168	166	164	162	161	160				
15	192	184	178	170	164	158	152	147	142	138	134	132	129	128	126				
20	178	168	159	149	141	133	125	119	113	108	103	100	96.8	95.1	93.5				
25	162	150	139	128	117	108	99.0	91.5	84.2	78.5	73.0	69.3	65.6	63.6	61.9				
30	145	131	118	105	93.5	83.0	72.9	64.4	56.3	50.0	44.0	39.7	35.8	33.6	31.8				
35	127	112	96.5	82.9	69.7	58.4	47.4	38.4	29.8	23.1	16.9	12.6	8.23	5.49	2.96				
40	109	91.7	75.3	60.6	46.7	34.7	23.5	14.3	4.91	0.72	0.67	0.61	0.64	0.65	0.73				
45	89.5	71.5	54.2	39.2	24.9	13.0	1.26	0.66	0.62	0.51	0.50	0.43	0.46	0.50	0.60				
50	70.2	51.5	34.1	18.9	4.67	0.67	0.60	0.46	0.44	0.47	0.44	0.53	0.51	0.61	0.66				
55	51.2	32.3	15.1	0.93	0.64	0.48	0.45	0.50	0.50	0.57	0.58	0.65	0.65	0.72	0.74				
60	32.6	14.4	0.78	0.54	0.47	0.50	0.50	0.60	0.62	0.71	0.72	0.81	0.80	0.87	0.86				
65	15.3	0.74	0.55	0.48	0.48	0.58	0.62	0.73	0.76	0.86	0.86	0.95	0.93	0.99	0.96				
70	0.85	0.53	0.50	0.55	0.57	0.70	0.76	0.87	0.90	1.00	1.02	1.10	1.08	1.14	1.11				
75	0.59	0.55	0.53	0.64	0.70	0.84	0.89	1.01	1.05	1.15	1.17	1.24	1.23	1.29	1.27				
80	0.59	0.60	0.63	0.76	0.83	0.97	1.02	1.15	1.19	1.28	1.30	1.38	1.38	1.42	1.41				
85	0.59	0.67	0.72	0.88	0.95	1.08	1.15	1.27	1.30	1.40	1.43	1.49	1.51	1.55	1.53				
90	0.63	0.74	0.83	0.99	1.07	1.20	1.26	1.38	1.42	1.52	1.54	1.61	1.62	1.66	1.64				
95	0.72	0.85	0.93	1.09	1.17	1.30	1.37	1.48	1.53	1.62	1.63	1.70	1.70	1.75	1.73				
100	0.79	0.95	1.03	1.18	1.26	1.39	1.45	1.57	1.61	1.69	1.72	1.78	1.79	1.82	1.82				
105	0.86	1.02	1.10	1.25	1.33	1.45	1.52	1.63	1.67	1.76	1.80	1.85	1.85	1.89	1.88				
110	0.97	1.09	1.17	1.30	1.38	1.50	1.56	1.67	1.70	1.79	1.82	1.89	1.91	1.93	1.92				
115	1.07	1.18	1.23	1.35	1.42	1.53	1.60	1.69	1.73	1.82	1.86	1.91	1.93	1.96	1.96				
120	1.08	1.22	1.29	1.42	1.47	1.57	1.62	1.71	1.75	1.84	1.89	1.94	1.96	1.98	1.97				
125	1.16	1.29	1.36	1.48	1.53	1.63	1.66	1.74	1.78	1.86	1.90	1.96	1.97	1.99	1.99				
130	1.22	1.36	1.44	1.55	1.59	1.68	1.72	1.80	1.82	1.91	1.91	1.97	1.97	1.99	1.99				
135	1.30	1.41	1.51	1.59	1.68	1.77	1.86	1.95	2.00	1.99	1.99	1.97	1.96	1.94	1.95				
140	1.28	1.37	1.51	1.52	1.61	1.64	1.77	1.97	1.88	2.01	1.92	1.88	1.88	1.92	1.95				
145	1.59	1.72	1.72	1.64	1.84	1.96	1.86	1.75	1.86	2.08	2.02	1.89	1.89	1.96	1.98				
150	1.61	1.71	1.77	1.72	1.68	1.72	1.80	1.96	2.02	1.90	1.87	1.88	1.88	1.90	1.97				
155	1.66	1.75	1.80	1.86	1.77	1.78	1.72	1.76	1.92	2.01	1.99	1.95	1.92	1.91	1.98				
160	1.69	1.77	1.82	1.87	1.89	1.89	1.85	1.86	1.81	1.83	1.86	1.87	1.89	1.87	1.94				
165	1.73	1.77	1.82	1.86	1.91	1.93	1.90	1.88	1.86	1.83	1.82	1.80	1.81	1.80	1.85				
170	1.71	1.72	1.79	1.81	1.86	1.87	1.91	1.90	1.88	1.87	1.82	1.77	1.75	1.73	1.75				
175	1.70	1.69	1.74	1.74	1.78	1.77	1.82	1.79	1.81	1.79	1.79	1.73	1.70	1.66	1.68				
180	1.67	1.67	1.68	1.67	1.68	1.68	1.69	1.67	1.67	1.67	1.66	1.65	1.63	1.58	1.55				

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature:25DEG  
 Operators:luominxian  
 Test Date:2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity:70%  
 Test Distance:8.425m [K=1.0000]  
 Remarks: 壁灯

## Photometric Data Table [cd]

G/C	0.0	5.0	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0
0.0	226.7	225.7	226.0	224.9	225.5	224.5	225.2	224.5	225.2	224.4
2.5	210.5	209.4	209.9	209.2	210.1	209.8	211.0	211.1	212.5	213.0
5.0	193.7	192.9	193.2	193.2	194.4	194.8	196.5	197.5	199.9	201.1
7.5	176.6	176.1	176.8	177.0	178.5	179.6	181.8	183.6	186.8	189.0
10.0	159.6	159.2	160.2	160.7	162.4	164.2	166.9	169.4	173.3	176.5
12.5	142.6	142.3	143.3	144.3	146.5	148.7	151.9	155.2	159.4	163.7
15.0	124.9	125.5	126.1	128.0	129.9	133.2	136.6	140.8	145.9	150.9
17.5	108.2	108.9	109.6	111.8	114.0	117.7	121.4	126.4	131.5	137.9
20.0	91.63	92.54	93.24	95.75	98.23	102.3	106.4	112.1	117.6	124.9
22.5	75.39	76.34	77.26	79.99	82.71	87.15	91.70	97.80	104.0	111.7
25.0	59.53	60.53	61.65	64.53	67.57	72.28	77.12	83.61	90.32	98.69
27.5	44.01	45.13	46.36	49.37	52.56	57.60	62.77	69.72	76.81	85.69
30.0	29.07	30.19	31.62	34.76	38.16	43.32	48.77	55.96	63.53	72.83
32.5	14.77	15.94	17.43	20.69	24.18	29.49	35.08	42.58	50.44	60.12
35.0	1.233	1.583	2.383	6.962	11.02	16.30	22.00	29.61	37.72	47.69
37.5	0.8154	0.8006	0.8695	0.8691	0.9590	2.074	9.677	17.22	25.41	35.56
40.0	0.7017	0.6789	0.7520	0.7554	0.8516	0.8777	0.9738	4.326	13.68	23.82
42.5	0.5886	0.5718	0.6294	0.6382	0.7293	0.7604	0.8651	0.9093	1.546	12.65
45.0	0.5377	0.5480	0.5640	0.5794	0.6073	0.6336	0.7425	0.7831	0.9329	1.368
47.5	0.5612	0.6025	0.5702	0.6066	0.5812	0.5977	0.6250	0.6654	0.8151	0.9008
50.0	0.6246	0.6564	0.6111	0.6520	0.5974	0.6338	0.6054	0.6111	0.6882	0.7786
52.5	0.6923	0.7246	0.6790	0.7155	0.6515	0.6747	0.6110	0.6383	0.6259	0.6687
55.0	0.7741	0.7972	0.7557	0.7834	0.7195	0.7289	0.6561	0.6746	0.6280	0.6385
57.5	0.8419	0.8739	0.8281	0.8560	0.8011	0.8103	0.7241	0.7153	0.6384	0.6656
60.0	0.9233	0.9464	0.9052	0.9330	0.8733	0.8784	0.8011	0.7743	0.6835	0.6926
62.5	0.9959	1.023	0.9863	1.010	0.9504	0.9508	0.8732	0.8513	0.7466	0.7334
65.0	1.082	1.100	1.068	1.078	1.027	1.028	0.9460	0.9235	0.8147	0.7789
67.5	1.163	1.177	1.145	1.155	1.100	1.100	1.018	0.9960	0.8867	0.8467
70.0	1.236	1.254	1.217	1.227	1.172	1.173	1.086	1.069	0.9550	0.9144
72.5	1.308	1.331	1.290	1.295	1.240	1.236	1.154	1.132	1.027	0.9825
75.0	1.385	1.404	1.362	1.372	1.313	1.299	1.217	1.195	1.095	1.046
77.5	1.448	1.471	1.435	1.435	1.376	1.358	1.290	1.254	1.154	1.105
80.0	1.521	1.526	1.489	1.498	1.435	1.422	1.340	1.308	1.213	1.159
82.5	1.580	1.594	1.553	1.557	1.507	1.481	1.403	1.372	1.263	1.213
85.0	1.625	1.644	1.607	1.617	1.552	1.539	1.453	1.417	1.326	1.277
87.5	1.675	1.698	1.657	1.670	1.607	1.594	1.512	1.471	1.380	1.317
90.0	1.729	1.743	1.720	1.716	1.657	1.648	1.570	1.530	1.435	1.372
92.5	1.774	1.788	1.761	1.756	1.697	1.684	1.607	1.571	1.471	1.422
95.0	1.806	1.833	1.802	1.793	1.734	1.716	1.636	1.607	1.521	1.458
97.5	1.851	1.861	1.842	1.833	1.770	1.747	1.666	1.648	1.544	1.503
100.0	1.883	1.888	1.869	1.861	1.806	1.778	1.702	1.680	1.585	1.539
102.5	1.892	1.910	1.896	1.888	1.833	1.802	1.729	1.693	1.616	1.566
105.0	1.915	1.938	1.915	1.910	1.860	1.833	1.756	1.729	1.630	1.598
107.5	1.942	1.956	1.947	1.933	1.879	1.856	1.788	1.743	1.666	1.625
110.0	1.969	1.965	1.947	1.940	1.897	1.867	1.797	1.761	1.675	1.639
112.5	2.010	1.960	1.952	1.952	1.897	1.879	1.806	1.763	1.697	1.651
115.0	2.001	1.951	1.954	1.947	1.898	1.881	1.821	1.764	1.698	1.655
117.5	1.960	1.942	1.955	1.942	1.900	1.879	1.818	1.761	1.699	1.658
120.0	1.924	1.910	1.947	1.922	1.900	1.871	1.815	1.752	1.700	1.661
122.5	1.900	1.897	1.934	1.901	1.895	1.874	1.811	1.752	1.701	1.667
125.0	1.889	1.883	1.915	1.887	1.893	1.833	1.811	1.746	1.702	1.672
127.5	1.884	1.878	1.910	1.878	1.880	1.815	1.806	1.736	1.707	1.674
130.0	1.870	1.861	1.887	1.870	1.861	1.812	1.797	1.729	1.716	1.675
132.5	1.851	1.833	1.865	1.833	1.833	1.806	1.783	1.730	1.715	1.667
135.0	1.833	1.818	1.838	1.826	1.822	1.799	1.770	1.732	1.708	1.668
137.5	1.815	1.812	1.824	1.820	1.811	1.811	1.774	1.733	1.702	1.669
140.0	1.856	1.893	2.036	2.136	1.874	1.833	1.822	1.806	1.709	1.670
142.5	1.978	2.046	2.128	1.829	1.843	1.815	1.820	1.784	1.761	1.734
145.0	1.892	1.992	2.082	1.802	1.816	1.793	1.802	1.753	1.747	1.707
147.5	1.825	1.960	2.060	1.784	1.802	1.770	1.779	1.729	1.738	1.684
150.0	1.814	1.915	1.874	1.761	1.766	1.733	1.743	1.698	1.702	1.652
152.5	1.812	1.865	1.784	1.747	1.746	1.711	1.712	1.679	1.683	1.648
155.0	1.809	1.824	1.743	1.734	1.734	1.692	1.696	1.670	1.665	1.648
157.5	1.807	1.811	1.734	1.702	1.712	1.678	1.687	1.657	1.663	1.643
160.0	1.779	1.719	1.698	1.666	1.684	1.661	1.680	1.652	1.669	1.738
162.5	1.711	1.630	1.652	1.621	1.653	1.616	1.648	1.651	1.675	1.704
165.0	1.692	1.598	1.616	1.598	1.625	1.598	1.621	1.666	1.697	1.687
167.5	1.634	1.521	1.557	1.526	1.562	1.546	1.602	1.657	1.681	1.657
170.0	1.535	1.471	1.503	1.476	1.503	1.538	1.616	1.625	1.657	1.620
172.5	1.449	1.403	1.431	1.421	1.453	1.542	1.603	1.593	1.612	1.584
175.0	1.381	1.349	1.377	1.388	1.476	1.530	1.566	1.548	1.585	1.557
177.5	1.308	1.295	1.326	1.421	1.512	1.503	1.535	1.516	1.553	1.526
180.0	1.254	1.254	1.304	1.421	1.467	1.462	1.489	1.498	1.521	1.521

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0	90.0	95.0
0.0	225.2	224.6	225.5	224.7	224.7	224.9	224.9	225.1	225.0	225.2
2.5	215.1	215.2	217.4	217.8	219.0	220.6	221.9	223.4	224.9	226.3
5.0	204.0	205.4	208.6	210.4	212.9	215.7	218.4	221.4	224.2	227.0
7.5	192.8	195.3	199.6	202.6	206.3	210.3	214.5	218.8	222.9	227.3
10.0	180.8	184.8	190.1	194.4	199.3	204.7	210.0	215.7	221.2	226.9
12.5	169.1	174.0	180.4	185.8	191.9	198.6	205.2	212.2	219.1	226.2
15.0	157.2	163.0	170.3	177.0	184.2	192.0	199.9	208.2	216.4	224.7
17.5	144.9	151.7	160.2	167.7	176.0	185.2	194.2	203.8	213.3	222.9
20.0	131.9	140.4	149.6	158.2	167.6	177.8	188.1	198.9	209.7	220.7
22.5	119.6	128.8	138.6	148.5	158.9	170.3	181.6	193.7	205.6	218.0
25.0	107.2	117.1	127.2	138.6	150.0	162.3	174.9	188.1	201.2	214.8
27.5	94.75	105.4	116.3	128.5	140.7	154.2	167.7	182.2	196.3	211.1
30.0	82.39	93.65	105.2	118.2	131.3	145.7	160.2	175.7	191.0	206.9
32.5	70.15	81.87	94.07	107.8	121.7	137.0	152.5	169.0	185.4	202.4
35.0	58.07	70.30	83.02	97.33	112.0	128.1	144.5	161.9	179.4	197.4
37.5	46.27	58.81	71.92	86.82	102.2	119.1	136.2	154.5	172.9	192.1
40.0	34.71	47.49	61.00	76.33	92.24	109.8	127.7	146.9	166.1	186.4
42.5	23.53	36.48	50.21	65.91	82.28	100.4	119.0	139.1	159.2	180.2
45.0	12.92	25.77	39.67	55.55	72.34	90.90	110.3	130.9	151.9	173.6
47.5	1.710	15.51	29.41	45.41	62.45	81.45	101.3	122.5	144.3	166.9
50.0	0.9644	5.541	19.47	35.48	52.66	71.93	92.19	114.1	136.4	159.8
52.5	0.8337	0.9732	10.15	25.85	42.97	62.46	82.99	105.5	128.3	152.4
55.0	0.7116	0.8554	1.203	16.53	33.52	52.98	73.83	96.60	120.1	144.7
57.5	0.6477	0.7243	0.9788	7.862	24.38	43.69	64.66	87.73	111.6	136.9
60.0	0.6473	0.6656	0.8379	1.036	15.61	34.64	55.60	78.86	103.1	128.7
62.5	0.6609	0.6791	0.7068	0.9311	7.404	25.79	46.52	69.91	94.34	120.4
65.0	0.6879	0.6992	0.6994	0.7873	1.106	17.28	37.59	60.94	85.59	111.9
67.5	0.7196	0.7243	0.7018	0.7289	0.9735	9.247	28.89	52.05	76.74	103.3
70.0	0.7784	0.7561	0.7042	0.7356	0.8330	1.803	20.47	43.18	67.88	94.62
72.5	0.8417	0.7924	0.7106	0.7379	0.7919	1.005	12.46	34.45	59.04	85.78
75.0	0.9094	0.8468	0.7332	0.7507	0.7911	0.8735	5.095	25.93	50.19	76.90
77.5	0.9684	0.9099	0.7738	0.7740	0.7903	0.8374	1.150	17.64	41.38	67.98
80.0	1.027	0.9643	0.8145	0.7834	0.7895	0.8284	1.006	9.786	32.70	59.06
82.5	1.086	1.019	0.8644	0.8104	0.7888	0.8284	0.9823	2.894	24.14	50.15
85.0	1.141	1.073	0.9233	0.8420	0.7880	0.8284	0.9652	1.118	15.76	41.29
87.5	1.195	1.127	0.9820	0.8964	0.7952	0.8284	0.9507	1.073	7.624	32.49
90.0	1.240	1.177	1.027	0.9418	0.8027	0.8284	0.9284	1.037	1.280	23.31
92.5	1.290	1.223	1.077	0.9915	0.8325	0.8284	0.9144	1.005	1.191	14.30
95.0	1.331	1.268	1.144	1.037	0.8825	0.8284	0.8874	0.9639	1.136	1.561
97.5	1.381	1.304	1.167	1.087	0.9279	0.8466	0.8692	0.9232	1.069	1.177
100.0	1.412	1.349	1.222	1.127	0.9774	0.8830	0.8375	0.8736	0.9872	1.041
102.5	1.448	1.381	1.245	1.164	1.014	0.9280	0.8302	0.8194	0.9011	0.9415
105.0	1.476	1.404	1.276	1.195	1.050	0.9688	0.8254	0.7967	0.8510	0.8601
107.5	1.507	1.431	1.301	1.227	1.091	1.010	0.8554	0.7968	0.8058	0.7921
110.0	1.526	1.458	1.331	1.258	1.114	1.041	0.8962	0.8061	0.7651	0.7424
112.5	1.544	1.471	1.349	1.272	1.131	1.059	0.9415	0.8511	0.7291	0.7061
115.0	1.550	1.480	1.367	1.300	1.435	1.100	0.9591	0.8738	0.7260	0.6856
117.5	1.557	1.497	1.390	1.317	1.221	1.123	0.9691	0.8874	0.7288	0.6816
120.0	1.567	1.507	1.399	1.345	1.231	1.136	1.000	0.9235	0.7739	0.6926
122.5	1.583	1.521	1.430	1.361	1.236	1.168	1.019	0.9508	0.8055	0.7291
125.0	1.592	1.535	1.444	1.376	1.249	1.186	1.059	0.9869	0.8374	0.7650
127.5	1.598	1.546	1.446	1.390	1.295	1.213	1.082	1.010	0.8692	0.8058
130.0	1.607	1.550	1.462	1.405	1.313	1.231	1.101	1.037	0.9007	0.8422
132.5	1.616	1.551	1.462	1.413	1.313	1.254	1.112	1.059	0.9281	0.8740
135.0	1.626	1.553	1.476	1.422	1.313	1.272	1.140	1.082	0.9596	0.9099
137.5	1.635	1.555	1.475	1.431	1.333	1.291	1.155	1.100	0.9868	0.9371
140.0	1.644	1.557	1.482	1.439	1.360	1.308	1.172	1.127	1.018	0.9963
142.5	1.654	1.567	1.485	1.440	1.394	1.327	1.236	1.195	1.078	1.037
145.0	1.653	1.597	1.544	1.497	1.421	1.372	1.254	1.218	1.104	1.092
147.5	1.653	1.607	1.544	1.512	1.444	1.417	1.331	1.308	1.222	1.195
150.0	1.643	1.602	1.566	1.544	1.480	1.467	1.399	1.395	1.299	1.254
152.5	1.625	1.598	1.575	1.567	1.612	1.548	1.512	1.530	1.481	1.376
155.0	1.633	1.630	1.752	1.666	1.616	1.603	1.562	1.561	1.486	1.453
157.5	1.708	1.729	1.720	1.641	1.616	1.617	1.588	1.565	1.489	1.485
160.0	1.739	1.675	1.675	1.630	1.616	1.619	1.596	1.580	1.521	1.521
162.5	1.693	1.648	1.662	1.621	1.616	1.621	1.600	1.594	1.544	1.548
165.0	1.684	1.638	1.652	1.620	1.616	1.623	1.605	1.612	1.565	1.575
167.5	1.666	1.607	1.625	1.597	1.616	1.625	1.609	1.621	1.578	1.589
170.0	1.630	1.598	1.607	1.590	1.616	1.628	1.613	1.625	1.593	1.598
172.5	1.598	1.557	1.580	1.578	1.607	1.630	1.612	1.626	1.616	1.615
175.0	1.571	1.543	1.569	1.566	1.604	1.619	1.648	1.624	1.623	1.625
177.5	1.544	1.533	1.548	1.557	1.589	1.610	1.616	1.618	1.621	1.634
180.0	1.526	1.530	1.548	1.553	1.593	1.607	1.616	1.616	1.621	1.643

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯



## Photometric Data Table [cd]

G/C	100.0	105.0	110.0	115.0	120.0	125.0	130.0	135.0	140.0	145.0
0.0	225.3	225.2	225.5	226.7	225.8	227.0	225.8	226.9	226.1	227.0
2.5	227.9	229.3	230.7	233.2	233.6	235.5	236.1	238.1	238.4	240.0
5.0	230.0	232.6	235.6	239.4	240.9	244.5	245.7	248.9	250.1	252.4
7.5	231.5	235.7	239.9	245.0	247.8	252.5	255.0	259.2	261.4	265.0
10.0	232.5	238.0	243.6	250.0	254.1	260.2	263.8	269.4	273.8	277.1
12.5	233.1	240.0	246.9	254.6	260.0	267.5	273.6	278.8	283.7	288.1
15.0	233.1	241.5	249.7	258.9	265.3	274.1	281.2	287.4	293.7	299.0
17.5	232.6	242.2	251.6	262.1	271.0	280.0	288.1	295.9	303.3	309.2
20.0	231.7	242.6	253.4	265.2	275.8	285.1	294.7	303.4	311.9	318.8
22.5	230.2	242.4	254.5	267.6	279.4	290.2	300.7	310.6	320.0	328.0
25.0	228.2	241.7	255.0	269.4	282.4	294.3	306.3	316.9	327.2	336.1
27.5	225.8	240.4	255.0	270.8	285.0	298.0	311.0	322.7	334.0	343.7
30.0	222.8	238.8	254.4	271.5	286.3	301.3	315.2	327.6	340.1	350.8
32.5	219.5	236.4	253.3	271.5	287.7	303.3	318.8	332.5	345.4	357.1
35.0	215.5	233.6	251.7	271.1	288.3	305.2	321.2	336.1	350.4	362.7
37.5	211.1	230.4	249.6	268.5	288.4	306.1	323.6	339.3	354.1	367.1
40.0	206.4	226.7	246.9	267.0	287.5	306.7	324.6	341.4	357.2	371.2
42.5	201.2	222.5	243.7	264.6	286.4	306.4	325.3	342.8	359.4	374.0
45.0	195.5	217.8	239.9	261.9	284.8	305.6	325.2	344.0	360.8	376.7
47.5	189.6	212.8	235.6	258.7	282.3	304.1	324.6	343.9	361.7	377.9
50.0	183.2	207.3	231.1	254.7	279.3	301.6	323.0	343.0	361.9	378.5
52.5	176.6	201.3	225.8	250.4	275.5	298.8	320.7	341.4	360.6	377.9
55.0	169.5	195.0	220.2	245.5	271.3	295.3	317.9	339.2	359.0	377.4
57.5	162.1	188.3	214.2	240.1	266.6	291.1	314.4	336.1	356.9	375.6
60.0	154.7	181.3	207.7	234.3	261.4	286.2	310.2	332.8	353.7	372.8
62.5	146.9	173.8	200.9	228.1	255.6	281.5	305.4	328.5	350.2	369.6
65.0	138.7	166.3	193.7	221.4	249.4	275.7	300.3	323.8	345.1	365.1
67.5	130.4	158.4	186.2	214.4	242.7	267.8	294.5	318.2	339.6	359.9
70.0	121.9	150.3	178.5	207.0	235.5	261.2	287.3	311.5	333.1	353.6
72.5	113.3	142.0	170.4	199.3	228.0	253.7	280.0	303.9	325.9	346.3
75.0	104.6	133.4	162.3	191.2	219.8	245.4	271.6	295.8	317.7	338.2
77.5	95.72	124.8	153.8	182.5	210.5	236.3	262.6	286.7	309.0	329.9
80.0	86.79	116.2	144.7	173.0	200.8	226.6	253.1	277.4	299.4	320.4
82.5	77.97	107.0	135.1	163.0	190.5	216.4	242.7	265.9	289.6	310.7
85.0	68.88	97.21	124.8	152.4	180.2	205.9	232.3	255.4	279.2	300.3
87.5	59.13	86.83	114.2	141.8	169.3	195.1	221.3	244.7	268.1	289.4
90.0	49.19	76.45	103.6	131.2	158.6	184.2	210.4	233.6	256.8	278.0
92.5	39.79	66.50	93.27	120.5	147.6	173.2	199.1	222.2	245.5	265.1
95.0	30.31	56.84	83.15	110.0	136.2	162.0	187.5	210.5	233.3	252.9
97.5	16.84	46.99	73.17	99.58	125.1	150.7	175.6	198.5	221.2	240.5
100.0	1.375	32.46	62.38	89.18	114.1	139.3	164.1	186.3	208.6	227.7
102.5	1.132	17.89	46.92	77.32	103.2	127.9	152.0	173.9	195.8	214.6
105.0	0.9872	1.122	32.10	61.02	89.75	116.2	139.5	161.4	182.5	201.1
107.5	0.9058	1.041	15.00	45.57	72.66	100.9	126.5	148.5	169.3	187.3
110.0	0.8420	0.9415	1.123	29.14	56.46	83.16	108.6	134.2	155.8	173.4
112.5	0.7877	0.8462	1.095	4.289	39.49	66.05	90.24	114.5	137.7	158.2
115.0	0.7425	0.7877	1.073	1.111	19.19	48.43	72.46	95.73	116.8	137.6
117.5	0.7063	0.7252	0.9824	1.105	1.141	28.91	53.92	76.97	97.28	116.9
120.0	0.6836	0.7062	0.9144	1.073	1.119	1.261	33.66	57.53	77.56	96.67
122.5	0.6611	0.7048	0.8837	0.9803	1.125	1.128	1.917	36.39	57.11	75.99
125.0	0.6654	0.7017	0.8739	0.9731	1.109	1.136	1.321	2.474	34.26	54.45
127.5	0.6925	0.7335	0.8819	0.9766	1.039	1.154	1.246	1.303	1.491	28.59
130.0	0.7333	0.7651	0.8899	0.9959	1.050	1.162	1.228	1.226	1.281	1.272
132.5	0.7831	0.8154	0.9280	1.021	1.077	1.141	1.209	1.249	1.219	1.240
135.0	0.8284	0.8786	1.009	1.064	1.106	1.082	1.137	1.213	1.249	1.236
137.5	0.8916	0.9510	1.086	1.155	1.114	1.152	1.091	1.091	1.232	1.253
140.0	0.9550	1.014	1.193	1.204	1.128	1.062	1.046	1.036	1.105	1.168
142.5	1.000	1.073	1.231	1.240	1.135	1.086	1.009	1.005	1.037	1.028
145.0	1.064	1.132	1.272	1.272	1.158	1.096	1.013	1.014	0.9959	1.003
147.5	1.141	1.177	1.312	1.295	1.190	1.123	1.046	1.050	0.9913	0.9915
150.0	1.226	1.259	1.331	1.304	1.222	1.159	1.091	1.091	1.018	1.028
152.5	1.331	1.349	1.372	1.309	1.222	1.204	1.136	1.132	1.073	1.069
155.0	1.385	1.404	1.399	1.317	1.245	1.237	1.172	1.182	1.109	1.123
157.5	1.435	1.438	1.394	1.367	1.299	1.295	1.231	1.236	1.172	1.168
160.0	1.467	1.467	1.412	1.408	1.358	1.344	1.294	1.299	1.227	1.231
162.5	1.503	1.499	1.448	1.449	1.394	1.390	1.344	1.349	1.299	1.286
165.0	1.521	1.535	1.503	1.485	1.445	1.444	1.381	1.394	1.335	1.340
167.5	1.544	1.557	1.530	1.521	1.476	1.481	1.430	1.440	1.385	1.386
170.0	1.566	1.580	1.548	1.562	1.521	1.530	1.485	1.489	1.440	1.440
172.5	1.611	1.618	1.593	1.593	1.557	1.562	1.516	1.535	1.491	1.485
175.0	1.619	1.630	1.611	1.625	1.589	1.598	1.575	1.580	1.526	1.544
177.5	1.617	1.639	1.616	1.643	1.612	1.639	1.607	1.630	1.584	1.594
180.0	1.652	1.661	1.670	1.675	1.661	1.679	1.670	1.675	1.666	1.666

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯

Photometric Data Table [cd]

G/C	150.0	155.0	160.0	165.0	170.0	175.0	180.0	185.0	190.0	195.0
0.0	226.2	226.8	226.0	226.6	225.8	226.5	226.7	225.7	226.0	224.9
2.5	239.9	241.3	240.9	242.0	241.3	242.0	243.1	241.6	241.8	240.4
5.0	253.5	255.6	255.6	257.0	256.9	257.9	258.8	257.4	257.4	255.5
7.5	266.3	269.2	270.9	271.7	272.8	272.8	274.4	273.4	272.6	271.4
10.0	280.4	282.5	285.1	286.2	287.5	287.8	289.1	288.9	287.3	286.0
12.5	292.4	295.2	298.3	299.7	301.8	302.2	304.1	303.3	301.7	299.8
15.0	304.2	307.6	311.4	313.3	315.5	316.2	318.2	317.7	315.3	313.4
17.5	315.1	319.5	323.7	325.9	328.2	329.3	331.8	331.1	328.6	326.2
20.0	325.3	330.3	335.4	338.1	340.8	342.0	344.6	343.5	341.2	338.6
22.5	335.3	340.7	346.2	349.8	353.0	354.4	357.2	355.9	353.2	349.8
25.0	344.3	350.7	356.5	360.4	364.2	365.5	369.1	367.7	364.7	361.4
27.5	352.7	360.0	366.5	371.0	374.6	376.6	380.1	378.7	375.7	371.2
30.0	360.6	368.5	375.3	380.8	384.5	386.0	390.7	388.7	385.3	381.0
32.5	367.5	376.2	383.7	389.2	393.2	395.5	400.1	398.1	394.6	389.5
35.0	373.6	383.1	391.0	397.2	401.4	403.8	408.3	406.9	403.1	397.5
37.5	379.4	389.2	397.6	404.1	408.5	411.3	416.2	414.6	410.4	404.6
40.0	383.7	394.0	403.2	410.4	414.9	418.3	423.3	421.1	416.9	411.4
42.5	387.7	398.4	408.1	415.0	420.5	423.7	429.3	427.2	422.7	416.4
45.0	390.4	401.9	412.0	419.6	425.4	429.3	434.2	432.6	427.6	421.3
47.5	392.2	404.8	414.9	423.2	429.0	432.5	438.7	436.2	431.8	425.0
50.0	393.2	406.8	417.6	425.9	432.1	435.5	441.5	439.4	434.5	427.6
52.5	393.6	407.5	418.4	427.5	433.9	437.6	443.9	441.5	436.4	428.9
55.0	393.1	407.1	418.8	428.5	434.5	438.7	444.7	442.6	437.9	429.7
57.5	392.2	406.2	418.6	427.6	434.3	438.7	445.2	442.5	437.4	429.5
60.0	389.5	404.7	416.5	426.8	433.4	437.7	444.7	441.8	436.6	428.4
62.5	386.4	401.5	414.1	423.9	431.3	435.7	442.3	439.4	434.6	426.3
65.0	382.7	397.7	410.0	420.5	427.7	431.8	438.6	436.2	431.1	422.4
67.5	377.4	392.7	405.6	415.9	422.9	427.6	434.8	431.9	426.9	418.1
70.0	371.1	386.6	399.9	410.2	417.8	422.6	429.6	426.8	421.2	412.2
72.5	364.5	380.2	392.8	404.1	411.2	415.9	423.1	420.2	415.2	406.2
75.0	356.5	372.3	385.6	396.1	404.0	408.9	416.1	413.1	407.9	398.6
77.5	348.0	364.0	377.5	388.3	395.8	400.5	407.3	404.6	399.3	390.9
80.0	338.6	354.7	368.4	379.2	387.0	392.2	398.7	395.8	390.6	381.9
82.5	328.7	345.6	358.7	369.8	377.2	382.3	388.6	386.3	381.1	372.2
85.0	318.5	335.0	348.5	359.5	367.1	372.0	378.7	375.6	370.7	362.0
87.5	307.6	324.3	337.2	348.3	356.0	360.7	367.3	364.6	359.7	351.0
90.0	296.3	312.5	325.8	336.9	344.3	349.4	356.0	353.0	348.0	339.6
92.5	284.3	300.8	313.9	324.6	332.3	336.9	343.0	340.3	336.0	327.3
95.0	272.2	288.4	301.0	312.0	319.3	324.2	330.1	327.3	323.2	314.5
97.5	259.3	275.7	288.0	298.6	306.0	311.0	316.4	314.0	309.5	301.1
100.0	246.2	260.7	274.7	285.4	292.4	296.8	302.2	300.1	295.4	287.7
102.5	232.8	247.1	260.6	270.4	277.9	282.8	287.6	285.6	281.4	273.4
105.0	218.9	233.1	246.2	255.3	263.3	266.7	272.0	270.3	265.1	258.8
107.5	204.8	218.6	231.3	240.4	248.1	251.1	255.5	254.8	249.8	243.6
110.0	190.3	203.8	216.6	225.1	232.3	235.7	239.4	238.9	234.3	228.2
112.5	175.5	188.7	200.6	209.4	216.6	219.6	223.0	222.7	218.2	212.7
115.0	156.2	171.7	184.6	193.5	200.3	203.3	206.4	206.0	201.9	196.2
117.5	133.9	149.5	162.6	172.9	180.6	184.3	187.9	187.6	183.3	176.5
120.0	112.6	127.6	139.9	149.4	156.6	160.2	164.0	163.3	159.4	152.8
122.5	91.56	106.0	117.0	126.8	132.9	136.9	140.2	139.8	136.1	129.0
125.0	69.91	84.16	94.80	104.2	109.8	113.8	117.0	115.9	113.1	106.4
127.5	46.90	61.38	71.92	81.24	86.70	90.56	93.70	92.65	90.02	83.39
130.0	10.45	35.37	47.53	57.16	62.61	66.55	69.97	68.75	66.11	59.31
132.5	1.268	1.302	7.772	26.17	34.59	39.97	44.55	43.05	39.84	30.93
135.0	1.224	1.227	1.233	1.205	1.208	1.414	4.107	1.824	0.9205	0.8033
137.5	1.236	1.249	1.204	1.193	1.137	1.076	0.6566	0.6915	0.6881	0.7242
140.0	1.277	1.286	1.222	1.200	1.140	1.096	0.7153	0.7326	0.7608	0.7691
142.5	1.128	1.185	1.254	1.222	1.190	1.154	0.8148	0.8056	0.8556	0.8600
145.0	1.023	1.018	1.078	1.081	1.128	1.081	0.7825	0.8602	0.7917	0.7799
147.5	0.9778	0.9686	0.9784	0.9368	0.9691	0.9182	0.6425	0.7246	0.6822	0.6927
150.0	0.9842	0.9735	0.9449	0.9235	0.9054	0.8693	0.5928	0.6962	0.6790	0.6836
152.5	1.010	1.010	0.9416	0.9552	0.9109	0.8919	0.5830	0.7060	0.7063	0.6835
155.0	1.059	1.060	0.9959	0.9961	0.9277	0.9326	0.5641	0.7243	0.7517	0.7241
157.5	1.109	1.109	1.050	1.046	0.9860	0.9735	0.5613	0.7558	0.8016	0.7875
160.0	1.163	1.168	1.109	1.109	1.036	1.023	0.5749	0.8011	0.8692	0.8595
162.5	1.231	1.232	1.163	1.177	1.113	1.091	0.6115	0.8282	0.9418	0.9365
165.0	1.286	1.299	1.240	1.241	1.186	1.159	0.6611	0.8778	1.014	0.9957
167.5	1.345	1.349	1.294	1.299	1.240	1.218	0.6883	0.9371	1.073	1.077
170.0	1.399	1.412	1.376	1.367	1.299	1.281	0.7426	0.9730	1.118	1.145
172.5	1.440	1.458	1.412	1.422	1.362	1.340	0.8150	1.027	1.168	1.217
175.0	1.521	1.512	1.476	1.485	1.421	1.408	0.8963	1.091	1.231	1.286
177.5	1.571	1.584	1.544	1.553	1.489	1.462	0.9779	1.159	1.295	1.367
180.0	1.639	1.652	1.621	1.621	1.575	1.548	1.014	1.249	1.290	1.408

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯

## Photometric Data Table [cd]

G/C	200.0	205.0	210.0	215.0	220.0	225.0	230.0	235.0	240.0	245.0
0.0	225.5	224.5	225.2	224.5	225.2	224.4	225.2	224.6	225.5	224.7
2.5	240.5	239.1	239.0	237.4	237.2	235.6	235.4	233.5	233.6	231.2
5.0	255.4	253.1	252.3	250.0	248.8	246.3	245.4	242.1	240.8	237.3
7.5	269.6	267.2	265.5	262.1	260.5	256.6	254.7	250.1	247.6	242.9
10.0	283.5	281.3	278.1	275.6	271.1	266.4	263.2	257.6	254.2	247.8
12.5	296.7	294.4	290.3	286.4	281.4	277.2	271.5	264.7	259.7	252.4
15.0	310.1	306.6	301.9	297.1	291.5	285.6	279.0	272.8	265.1	256.4
17.5	322.5	318.4	312.9	307.6	300.6	294.3	286.2	278.4	269.8	259.7
20.0	334.3	329.7	323.4	317.2	309.6	301.9	293.0	284.0	273.9	262.6
22.5	345.2	340.0	333.2	326.2	317.7	308.8	298.7	288.5	277.3	264.9
25.0	355.6	350.3	342.7	334.4	324.9	315.1	304.2	293.0	280.6	266.6
27.5	365.7	359.2	351.0	342.3	331.7	320.5	309.0	296.1	282.9	267.7
30.0	374.8	368.0	358.8	349.1	337.6	325.8	312.8	298.9	284.6	268.3
32.5	383.1	375.6	366.1	354.9	343.0	330.3	316.2	301.4	285.7	268.4
35.0	391.0	382.6	372.4	360.9	347.9	334.1	318.9	302.9	286.3	267.7
37.5	397.5	388.6	378.1	365.8	351.9	337.0	321.0	304.0	286.0	266.6
40.0	403.6	394.3	382.6	369.7	355.1	339.2	322.4	304.4	285.7	264.8
42.5	408.4	398.5	386.4	372.7	357.1	340.8	323.0	304.1	284.4	262.6
45.0	413.0	402.2	389.5	375.1	359.2	342.0	322.9	302.9	282.3	259.7
47.5	415.5	404.7	391.9	376.4	360.1	341.6	322.2	301.1	279.9	256.4
50.0	418.4	406.6	393.3	377.5	360.0	341.3	320.5	299.0	276.9	252.4
52.5	419.7	407.6	393.7	377.0	359.4	339.7	318.7	296.1	273.4	247.9
55.0	420.1	407.7	393.4	376.5	357.8	337.5	315.6	292.7	267.6	243.0
57.5	419.5	406.9	392.0	374.7	356.0	334.7	312.7	288.6	262.8	237.5
60.0	418.1	405.1	390.1	372.4	352.8	331.3	308.0	283.7	257.5	231.6
62.5	415.6	402.4	386.8	369.1	349.2	327.0	303.8	278.6	251.7	225.1
65.0	411.7	398.8	383.2	364.7	344.4	322.4	298.4	273.1	245.5	218.4
67.5	407.4	394.3	378.5	359.7	339.7	316.8	292.6	266.8	238.9	211.2
70.0	401.7	387.9	372.4	353.7	333.7	310.4	286.6	260.1	231.9	203.8
72.5	395.3	381.8	365.7	346.9	326.5	303.6	279.3	252.8	224.4	196.0
75.0	388.2	373.9	357.9	339.2	318.3	295.5	270.9	245.0	216.6	188.0
77.5	380.0	365.6	349.5	330.3	309.8	286.7	261.0	235.8	208.1	179.6
80.0	371.3	356.6	340.5	321.3	300.3	276.8	251.4	226.6	198.6	170.6
82.5	361.6	346.9	330.9	311.3	290.5	267.4	241.5	216.5	188.8	160.9
85.0	351.0	336.5	320.3	300.9	280.0	256.8	230.9	205.8	178.3	150.5
87.5	339.8	325.7	309.8	289.8	268.4	245.9	220.4	195.1	167.6	139.9
90.0	328.7	314.3	298.3	278.6	256.9	234.9	209.4	184.2	156.9	129.3
92.5	316.8	302.1	286.3	267.1	245.3	223.3	198.1	173.1	145.9	118.6
95.0	304.1	289.7	274.1	254.8	233.3	211.4	186.6	161.8	135.1	108.1
97.5	290.8	276.8	259.9	242.2	221.0	199.5	175.0	150.4	124.2	97.57
100.0	277.3	263.7	246.9	229.4	208.6	187.3	163.3	138.7	113.1	87.03
102.5	262.2	249.7	233.5	216.4	195.8	174.6	151.2	126.7	102.1	76.03
105.0	247.7	235.8	219.6	202.6	182.6	162.0	138.9	114.9	89.77	59.47
107.5	232.8	221.2	205.4	188.9	169.3	149.1	126.5	100.3	72.32	44.04
110.0	217.7	206.0	191.0	174.6	155.7	134.4	109.5	82.31	56.06	27.89
112.5	202.2	190.9	176.1	160.0	139.2	115.0	90.88	65.21	39.44	2.825
115.0	186.5	174.4	158.4	139.4	118.5	95.82	72.96	47.74	20.43	0.6520
117.5	165.4	152.2	136.1	117.8	98.73	76.98	54.50	28.64	0.6332	0.6292
120.0	142.4	129.1	114.9	97.42	79.00	57.63	34.81	0.8298	0.6186	0.6486
122.5	120.1	107.5	93.83	76.73	58.69	36.81	2.484	0.6369	0.6975	0.5842
125.0	97.82	85.57	72.19	55.30	36.61	2.443	0.6732	0.6517	0.7016	0.5749
127.5	74.93	62.81	49.38	30.68	1.306	0.6836	0.7062	0.7826	0.6419	0.5832
130.0	50.82	37.76	17.54	0.7977	0.7155	0.7149	0.8470	0.7744	0.6565	0.6020
132.5	15.51	1.086	0.8376	0.7696	0.8376	0.8824	0.8599	0.7455	0.7018	0.6473
135.0	0.7784	0.8422	0.9082	0.8916	0.9643	0.9063	0.7785	0.7379	0.7470	0.7240
137.5	0.7925	0.8435	0.9236	0.9132	0.9053	0.7968	0.6970	0.7347	0.7666	0.7695
140.0	0.8547	0.8822	0.9053	0.8651	0.7107	0.7108	0.6934	0.7288	0.7787	0.8058
142.5	0.8644	0.8576	0.7557	0.7336	0.7050	0.6888	0.7198	0.7385	0.8194	0.8598
145.0	0.7106	0.7288	0.7105	0.7161	0.7067	0.6919	0.7743	0.7785	0.8692	0.9098
147.5	0.7031	0.7098	0.7154	0.7206	0.7425	0.7424	0.8198	0.8237	0.9191	0.9551
150.0	0.6972	0.7170	0.7560	0.7287	0.7924	0.8057	0.8783	0.8826	0.9782	1.000
152.5	0.7379	0.7243	0.8059	0.7876	0.8511	0.8598	0.9328	0.9414	1.032	1.050
155.0	0.7879	0.7920	0.8601	0.8637	0.9103	0.9186	0.9916	0.9999	1.082	1.109
157.5	0.8421	0.8325	0.9101	0.9006	0.9734	0.9819	1.046	1.059	1.141	1.168
160.0	0.9099	0.8962	0.9734	0.9683	1.037	1.046	1.114	1.113	1.209	1.227
162.5	0.9825	0.9687	1.046	1.037	1.105	1.113	1.186	1.191	1.277	1.281
165.0	1.050	1.041	1.105	1.100	1.173	1.181	1.254	1.249	1.327	1.340
167.5	1.119	1.104	1.173	1.163	1.227	1.231	1.295	1.298	1.367	1.385
170.0	1.186	1.172	1.236	1.227	1.295	1.290	1.344	1.335	1.408	1.417
172.5	1.254	1.249	1.304	1.295	1.354	1.344	1.394	1.376	1.440	1.452
175.0	1.336	1.326	1.376	1.362	1.408	1.403	1.440	1.430	1.485	1.494
177.5	1.399	1.385	1.440	1.430	1.462	1.453	1.485	1.467	1.521	1.527
180.0	1.453	1.458	1.480	1.485	1.512	1.521	1.530	1.521	1.535	1.553

C Range: 0 - 360DEG  
C Interval: 5.0DEG  
Test Speed: HIGH  
Temperature: 25DEG  
Operators: luominxian  
Test Date: 2018-04-11

γ Range: 0 - 180DEG  
γ Interval: 0.5DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
Humidity: 70%  
Test Distance: 8.425m [K=1.0000]  
Remarks: 壁灯



## Photometric Data Table [cd]

G/C	300.0	305.0	310.0	315.0	320.0	325.0	330.0	335.0	340.0	345.0
0.0	225.8	227.0	225.8	226.9	226.1	227.0	226.2	226.8	226.0	226.6
2.5	217.4	217.1	215.3	215.4	213.6	213.3	212.1	211.9	210.8	210.7
5.0	208.7	207.2	204.4	203.4	200.7	199.6	197.6	196.7	195.2	194.8
7.5	199.6	197.0	193.1	191.0	187.5	185.5	183.0	181.4	179.4	178.7
10.0	190.2	186.5	181.5	178.2	174.2	171.4	168.1	166.1	163.6	162.4
12.5	180.3	175.4	169.7	165.6	160.6	157.0	153.1	150.7	147.7	146.0
15.0	170.2	164.3	157.6	152.3	146.8	142.4	138.1	134.0	131.7	129.0
17.5	160.0	152.7	145.3	139.1	133.0	127.3	123.1	118.7	115.8	112.8
20.0	149.4	141.2	132.9	125.3	119.1	112.8	108.1	103.3	100.1	96.81
22.5	138.5	128.8	120.5	112.2	105.3	98.46	93.28	88.09	84.46	81.05
25.0	127.6	117.1	108.0	98.99	91.54	84.23	78.54	73.03	69.27	65.56
27.5	116.6	105.2	95.44	85.87	77.88	70.13	64.12	58.30	54.26	50.44
30.0	105.4	93.46	82.95	72.89	64.40	56.33	49.97	43.96	39.67	35.77
32.5	94.16	81.54	70.58	60.06	51.21	42.83	36.24	30.11	25.69	21.74
35.0	82.94	69.74	58.38	47.44	38.37	29.83	23.12	16.94	12.56	8.232
37.5	71.71	58.05	46.33	35.23	26.01	17.44	10.77	2.908	0.8293	0.7336
40.0	60.62	46.70	34.75	23.54	14.32	4.910	0.7190	0.6749	0.6062	0.6432
42.5	49.75	35.65	23.56	12.47	1.821	0.7017	0.5884	0.5889	0.5114	0.5525
45.0	39.16	24.95	12.97	1.258	0.6560	0.6208	0.5064	0.4982	0.4346	0.4574
47.5	28.85	14.72	1.716	0.6977	0.5701	0.5299	0.4527	0.4301	0.4664	0.4643
50.0	18.91	4.674	0.6741	0.6021	0.4618	0.4438	0.4664	0.4432	0.5252	0.5070
52.5	9.615	0.7517	0.5702	0.4936	0.4482	0.4534	0.5164	0.5025	0.5797	0.5658
55.0	0.9262	0.6431	0.4788	0.4550	0.4980	0.4976	0.5705	0.5840	0.6475	0.6517
57.5	0.6562	0.5390	0.4575	0.4606	0.5478	0.5476	0.6385	0.6427	0.7248	0.7196
60.0	0.5427	0.4679	0.4983	0.5024	0.5975	0.6156	0.7109	0.7197	0.8059	0.8012
62.5	0.4663	0.4604	0.5343	0.5741	0.6658	0.6878	0.7790	0.7922	0.8651	0.8600
65.0	0.4800	0.4841	0.5841	0.6154	0.7292	0.7558	0.8559	0.8645	0.9463	0.9325
67.5	0.5116	0.5292	0.6431	0.6835	0.8013	0.8281	0.9236	0.9458	1.015	1.009
70.0	0.5524	0.5748	0.7020	0.7559	0.8692	0.9049	1.005	1.018	1.096	1.082
72.5	0.5978	0.6381	0.7745	0.8191	0.9419	0.9820	1.077	1.091	1.164	1.163
75.0	0.6432	0.6969	0.8424	0.8917	1.010	1.045	1.150	1.168	1.241	1.231
77.5	0.6973	0.7689	0.9056	0.9642	1.078	1.118	1.213	1.236	1.309	1.317
80.0	0.7562	0.8283	0.9691	1.023	1.150	1.190	1.281	1.304	1.376	1.376
82.5	0.8198	0.8871	1.032	1.086	1.204	1.249	1.345	1.362	1.440	1.448
85.0	0.8782	0.9461	1.082	1.150	1.268	1.299	1.399	1.426	1.494	1.507
87.5	0.9238	1.009	1.141	1.209	1.322	1.367	1.458	1.484	1.562	1.566
90.0	0.9869	1.068	1.195	1.263	1.376	1.421	1.517	1.539	1.607	1.616
92.5	1.041	1.114	1.254	1.312	1.422	1.471	1.566	1.584	1.662	1.652
95.0	1.091	1.168	1.304	1.372	1.476	1.525	1.616	1.630	1.698	1.702
97.5	1.141	1.213	1.349	1.430	1.530	1.575	1.657	1.675	1.739	1.743
100.0	1.182	1.258	1.385	1.449	1.566	1.611	1.693	1.720	1.779	1.792
102.5	1.222	1.295	1.426	1.489	1.594	1.639	1.725	1.756	1.820	1.820
105.0	1.250	1.327	1.453	1.516	1.630	1.666	1.756	1.797	1.852	1.851
107.5	1.276	1.354	1.476	1.535	1.643	1.684	1.770	1.804	1.870	1.879
110.0	1.299	1.376	1.498	1.557	1.665	1.702	1.790	1.824	1.887	1.906
112.5	1.322	1.390	1.521	1.584	1.678	1.718	1.798	1.829	1.906	1.915
115.0	1.349	1.418	1.530	1.596	1.691	1.729	1.815	1.860	1.915	1.933
117.5	1.381	1.444	1.553	1.607	1.698	1.739	1.829	1.874	1.928	1.947
120.0	1.417	1.471	1.571	1.619	1.710	1.752	1.842	1.886	1.937	1.960
122.5	1.440	1.512	1.603	1.630	1.720	1.761	1.850	1.894	1.947	1.966
125.0	1.476	1.526	1.625	1.661	1.743	1.779	1.856	1.899	1.957	1.969
127.5	1.503	1.557	1.657	1.684	1.768	1.804	1.874	1.905	1.969	1.969
130.0	1.548	1.593	1.684	1.720	1.802	1.824	1.906	1.910	1.974	1.969
132.5	1.589	1.634	1.730	1.788	1.874	1.896	1.969	1.951	1.983	1.967
135.0	1.589	1.684	1.775	1.856	1.947	2.001	1.992	1.992	1.969	1.965
137.5	1.507	1.581	1.725	1.684	1.743	1.835	1.971	1.840	1.899	1.892
140.0	1.517	1.605	1.643	1.774	1.974	1.879	2.010	1.919	1.879	1.879
142.5	1.598	1.841	1.789	1.739	1.797	2.004	2.118	1.969	1.879	1.937
145.0	1.636	1.843	1.960	1.856	1.752	1.857	2.082	2.023	1.887	1.892
147.5	1.662	1.716	1.869	1.815	2.005	1.874	1.903	1.983	1.892	1.882
150.0	1.721	1.683	1.724	1.802	1.965	2.023	1.901	1.873	1.876	1.880
152.5	1.770	1.702	1.707	1.716	1.869	2.011	1.985	1.910	1.884	1.888
155.0	1.857	1.774	1.779	1.720	1.761	1.925	2.010	1.987	1.946	1.919
157.5	1.874	1.838	1.821	1.792	1.784	1.815	1.905	1.987	1.943	1.947
160.0	1.874	1.892	1.888	1.847	1.861	1.808	1.834	1.861	1.869	1.892
162.5	1.872	1.933	1.929	1.901	1.868	1.856	1.827	1.825	1.809	1.833
165.0	1.865	1.915	1.928	1.903	1.883	1.860	1.834	1.817	1.801	1.811
167.5	1.833	1.888	1.892	1.914	1.895	1.878	1.839	1.817	1.773	1.779
170.0	1.806	1.856	1.867	1.910	1.897	1.881	1.868	1.818	1.771	1.752
172.5	1.765	1.820	1.824	1.865	1.838	1.861	1.842	1.815	1.747	1.725
175.0	1.740	1.784	1.774	1.815	1.792	1.806	1.793	1.788	1.731	1.698
177.5	1.720	1.738	1.729	1.757	1.725	1.743	1.734	1.734	1.715	1.689
180.0	1.675	1.679	1.679	1.689	1.670	1.666	1.666	1.661	1.648	1.634

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯


## Photometric Data Table [cd]

G/C	350.0	355.0
0.0	225.8	226.5
2.5	209.7	210.2
5.0	193.6	193.5
7.5	177.1	177.0
10.0	160.8	160.4
12.5	144.2	143.6
15.0	127.7	126.2
17.5	111.4	109.8
20.0	95.13	93.55
22.5	79.33	77.58
25.0	63.63	61.94
27.5	48.47	46.61
30.0	33.64	31.83
32.5	19.52	17.69
35.0	5.487	2.963
37.5	0.7242	0.8242
40.0	0.6465	0.7334
42.5	0.5292	0.6383
45.0	0.5044	0.5977
47.5	0.5524	0.6379
50.0	0.6068	0.6607
52.5	0.6565	0.7058
55.0	0.7201	0.7375
57.5	0.7833	0.7921
60.0	0.8697	0.8645
62.5	0.9151	0.8963
65.0	0.9915	0.9641
67.5	1.064	1.036
70.0	1.141	1.114
72.5	1.218	1.195
75.0	1.290	1.267
77.5	1.358	1.340
80.0	1.422	1.412
82.5	1.490	1.471
85.0	1.553	1.535
87.5	1.616	1.589
90.0	1.662	1.638
92.5	1.707	1.688
95.0	1.752	1.734
97.5	1.784	1.774
100.0	1.825	1.820
102.5	1.861	1.851
105.0	1.892	1.878
107.5	1.915	1.897
110.0	1.933	1.919
112.5	1.947	1.947
115.0	1.962	1.960
117.5	1.974	1.960
120.0	1.980	1.973
122.5	1.983	1.985
125.0	1.986	1.987
127.5	1.989	1.987
130.0	1.992	1.987
132.5	1.960	1.970
135.0	1.942	1.951
137.5	1.931	1.924
140.0	1.920	1.949
142.5	1.950	1.993
145.0	1.955	1.978
147.5	1.907	1.961
150.0	1.901	1.966
152.5	1.915	1.975
155.0	1.913	1.983
157.5	1.911	1.995
160.0	1.874	1.943
162.5	1.824	1.879
165.0	1.801	1.847
167.5	1.765	1.793
170.0	1.734	1.752
172.5	1.698	1.716
175.0	1.657	1.679
177.5	1.634	1.639
180.0	1.584	1.548

C Range: 0 - 360DEG  
 C Interval: 5.0DEG  
 Test Speed: HIGH  
 Temperature: 25DEG  
 Operators: luominxian  
 Test Date: 2018-04-11


$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 0.5DEG  
 Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.272  
 Humidity: 70%  
 Test Distance: 8.425m [K=1.0000]  
 Remarks: 壁灯

I (cd)

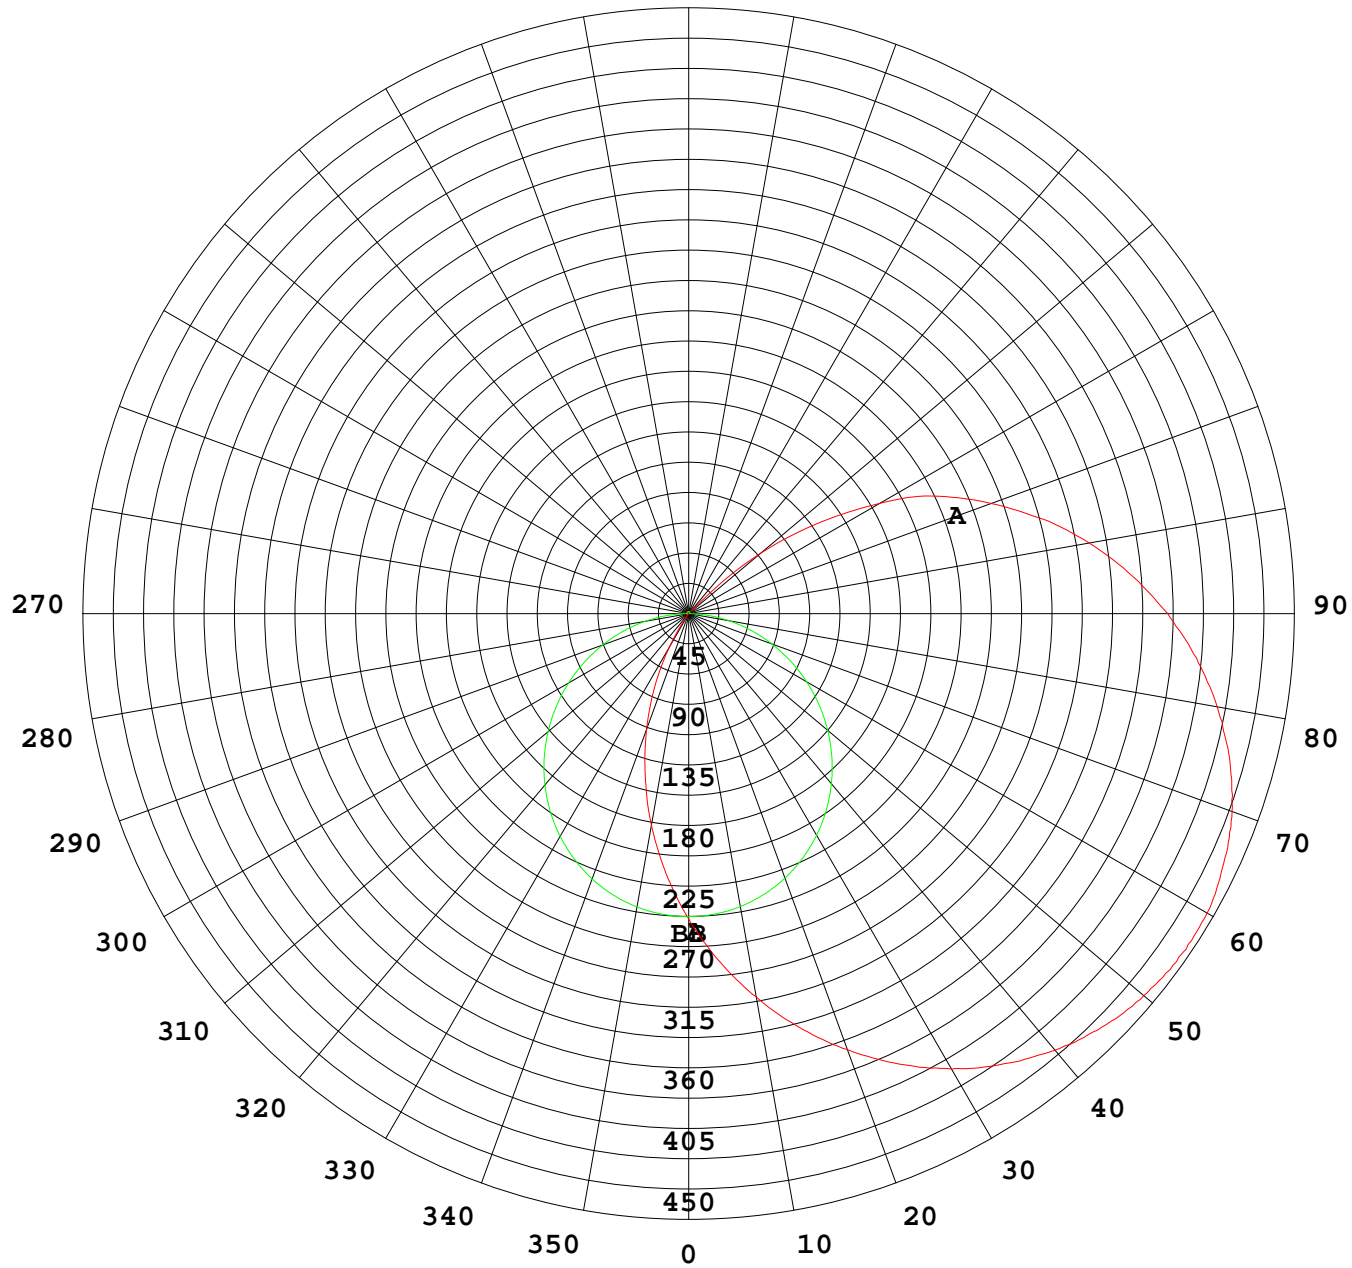

1000 lm

$K = 1$

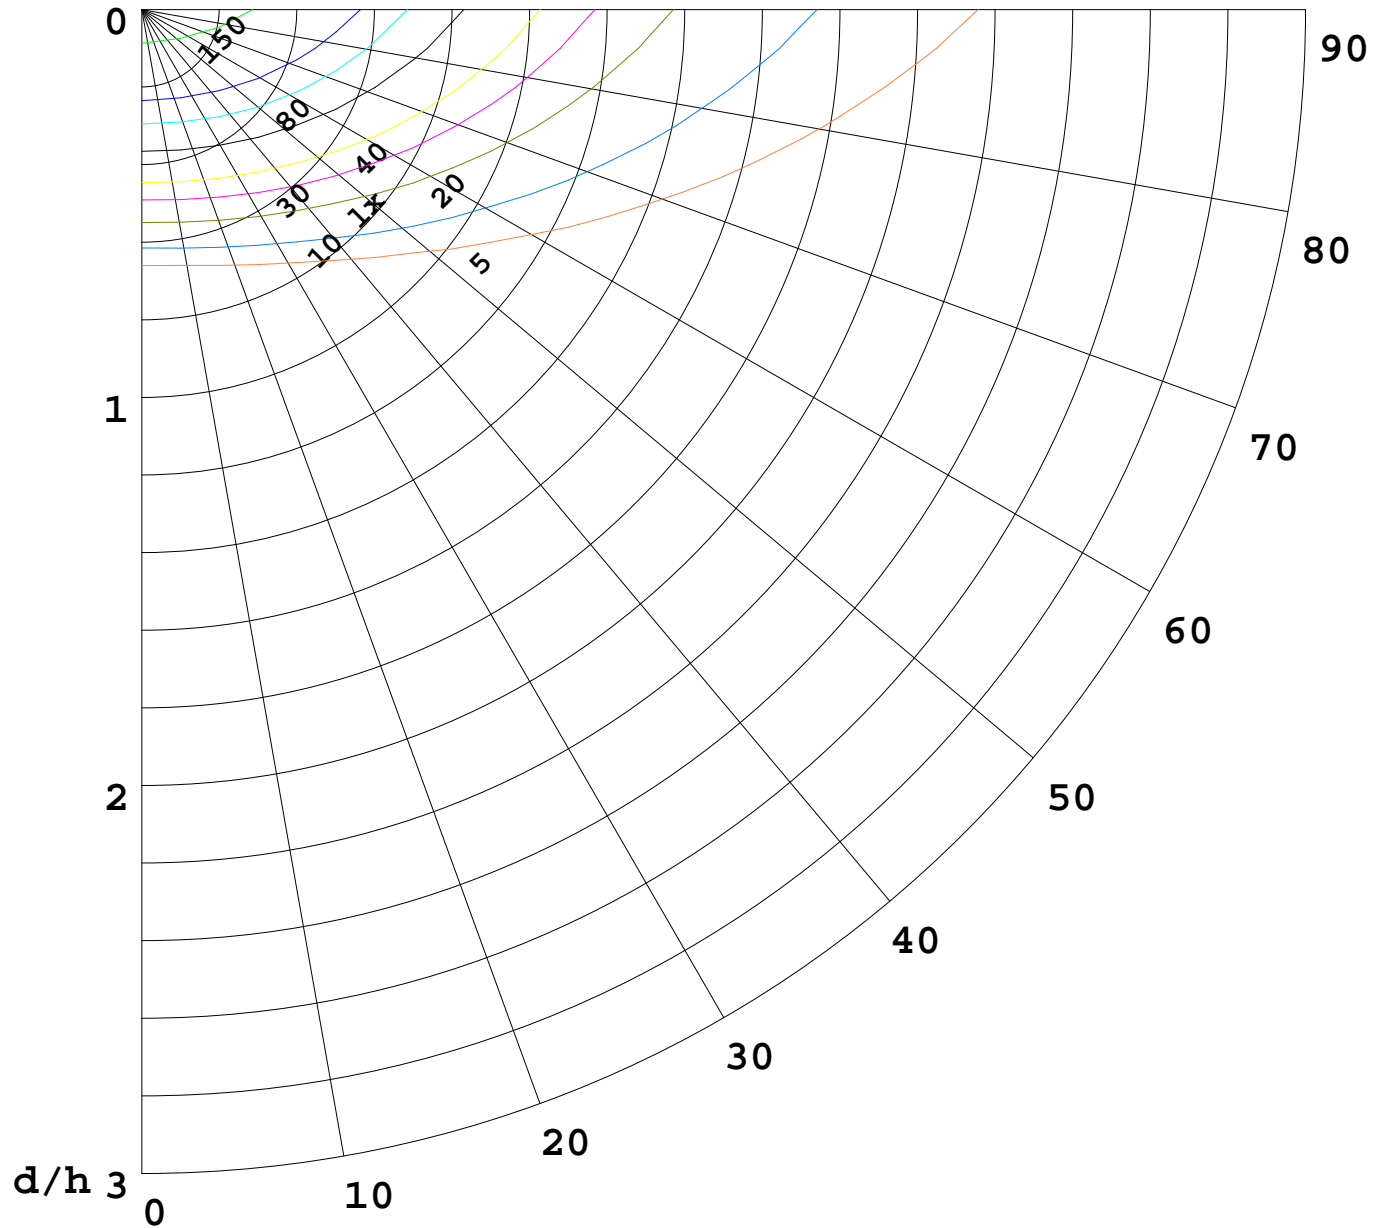



**F** = 5000 lm  
**K** = 0.7  
**Hcc** = 0.0 m  
**Hfc** = 0.0 m  
**Eave** = 100 lx

	<b>Pcc</b>	<b>Pw</b>	<b>Pfc</b>
—————	70	50	30
—————	50	30	20

