



|                |  |              |
|----------------|--|--------------|
| LOCATION       |  | DATE         |
| PREPARED BY    |  | QUANTITY     |
| COMMENTS       |  | FIXTURE TYPE |
| CATALOG NUMBER |  |              |

## Carlisle LED Flush Mount - Universal Driver CAF Series

### Features

Metal trim bands with a white floating diffuser. Adjustable output on 14" model. Ideal use in kitchens, hallways, and anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).



### Construction

A 22-gauge steel pan made by stamping process and painted in lighting grade white. A vacuum formed diffuser is secured with decorative dual metal bands. Standard mounting holes and hardware included. Power supply connections must be made inside a junction box (not included).

### Finish

Satin nickel metal trim bands.

### Diffuser

0.080" thick vacuum formed smooth white acrylic.

### Electrical

Input 120-277 VAC / 60 Hz.  
0-10V dimming (120-277V), TRIAC/ELV (120V)

### LED

Integrated LED modules capable of producing:  
 12" - 13W = 1200 delivered lumens  
 14" - 13W/27W = 1180/2360 delivered lumens  
 18" - 34W = 2930 delivered lumens  
 24" - 34W = 3250 delivered lumens  
 Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT).  
 Rated for 50,000 Hrs., 90 CRI.

### Certification

All fixtures are cETLus listed for indoor damp locations.  
 Title 24/JA8 Compliant  
 Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.


### Options for 14", 18" & 24" ONLY

Emergency Battery Back-Up (add -BB to the end of the model number)

### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

**Specifications and dimensions  
subject to change without notice.**

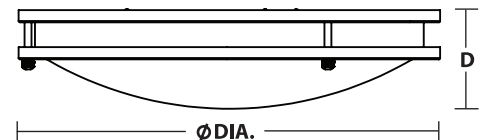

## Ordering Information:

| Satin Nickel  | LED     | Delivered Lumens | Adjustable CCT                | DIA. | D      |
|---------------|---------|------------------|-------------------------------|------|--------|
| CAF12L5AJUDSN | 13W     | 1200             | 2700K/3000K/3500K/4000K/5000K | 12"  | 3-1/2" |
| CAF14L5AJUDSN | 13W/27W | 1180/2360        | 2700K/3000K/3500K/4000K/5000K | 14"  | 3-1/2" |
| CAF18L5AJUDSN | 34W     | 2930             | 2700K/3000K/3500K/4000K/5000K | 18"  | 3-1/2" |
| CAF24L5AJUDSN | 34W     | 3250             | 2700K/3000K/3500K/4000K/5000K | 24"  | 5"     |