



Edge Round Large LED Surface Mount Disc Light EGRF Series

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Features

This ultra low profile design provides a dramatic look and features an edge-lit light panel construction. Products can be used in various applications including corridors, closets, bath, showers, hallway, kitchen and anywhere general lighting is needed.

Indoor use only - Wall or ceiling mount.

Outdoor use only - Covered ceiling mount.



Construction

Edge-lit technology housing is injection molded with steel backplate.

Twist and lock bracket.

Mounts to standard junction box (not included).

Power supply connections must be made inside junction box.



SN



BK



WH

Finish

Black, Satin Nickel or White.

Diffuser

White acrylic diffuser.

Electrical

Input 120-277 VAC 60 HZ.

Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.

TRIAC and ELV dimming only at 120 VAC.

LED

Integrated LED modules capable of producing:



25W = 2000 delivered lumens

30W = 2250 delivered lumens

40W = 2600 delivered lumens

Adjustable 2700K, 3000K, 3500K, 4000K, 5000K (CCT).

Rated for 50,000 Hrs., 90 CRI.

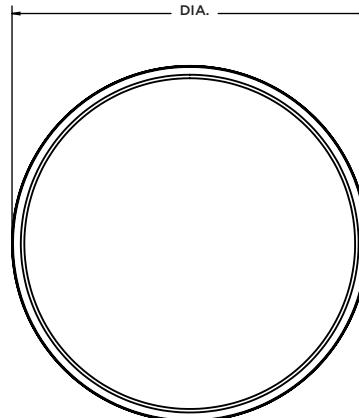

Certification

cETLus listed

Title 24/JA8 Compliant

Wet location rated for indoor use. Outdoor wet location rated for covered ceiling mount applications ONLY (not recommended for any other outdoor use).

Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions

subject to change without notice.

Ordering Information:

Black EGRF1625LAJUDBK EGRF2030LAJUDBK EGRF2440LAJUDBK	Satin Nickel EGRF1625LAJUDSN EGRF2030LAJUDSN EGRF2440LAJUDSN	White EGRF1625LAJUDWH EGRF2030LAJUDWH EGRF2440LAJUDWH	LED 25W 30W 40W	Delivered Lumens 2000 2250 2600	Adjustable CCT 2700K/3000K/3500K/4000K/5000K 2700K/3000K/3500K/4000K/5000K 2700K/3000K/3500K/4000K/5000K	DIA. 16" 20" 23-5/8"	D 1" 1" 1"
--	---	--	--------------------------	---	---	-------------------------------	---------------------