



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Warsaw Low Profile Economy Wrap LWL Series

Features

This low profile, clean appearance, surface mounted wrap provides high light levels with a clear prismatic lens. It can be used in various residential applications. Fixture mounts to a standard junction box (not included) on a ceiling.

Construction

Housing is die-formed of 22-gauge steel. Power supply connections must be made inside the junction box (not included).

Finish

Brushed nickel end caps.

Diffuser

Acrylic diffuser is .060" thick prismatic. Diffuser rests in position on the end cap flange and is removed by a lift and shift motion.

Electrical

Input 120-277VAC / 60Hz.
Not compatible with dimmers.

LED

Integrated LED modules capable of producing:
39W, 3600 lumens
4000K (CCT), Rated for 50,000 Hrs., 80 CRI.

Certification



cETLus listed for indoor damp locations.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

**Limited Quantities Remain.
Consult Factory.**

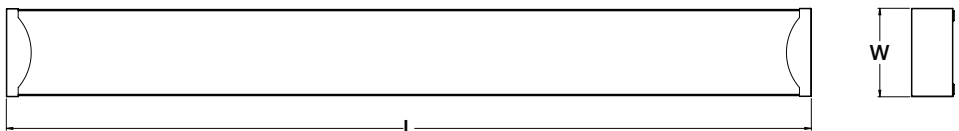

Ordering Information:

Brushed Nickel	LED	Source Lumens	CCT	L	W	D
LWL05483600L40SN	39W	3600	4000K	48"	5-1/4"	2-1/2"