



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Path LED Outdoor Sconce PTHW Series

### Features

This outdoor LED light is ideal for security and general lighting. Vertical or horizontal mounting. Fixture mounts to standard junction box (not included).



### Emergency Back-Up (Optional '-BB')

- 90 minute run-time
- 9.6VDC LiFePO4 battery
- 8 watts

### Construction

Durable metal construction with powder coat finish. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

### Finish

Black finish.

### Diffuser

White acrylic diffuser.

### Electrical

Input 120-277 VAC 60 HZ.  
0-10V dimming (120-277V), TRIAC (120V).  
Minimum starting temp -4° F / -20°C

### Lamping

Fixture includes a LED modules capable of producing:  
20W = 1320 delivered lumens  
24W = 1510 delivered lumens  
30W = 2010 delivered lumens  
Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT).  
Rated for 50,000 Hrs., 90 CRI.


### Certification

All fixtures are cETLus listed for wet locations.  
Title 24/JA8 Compliant

### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

**Specifications and dimensions**  
subject to change without notice.

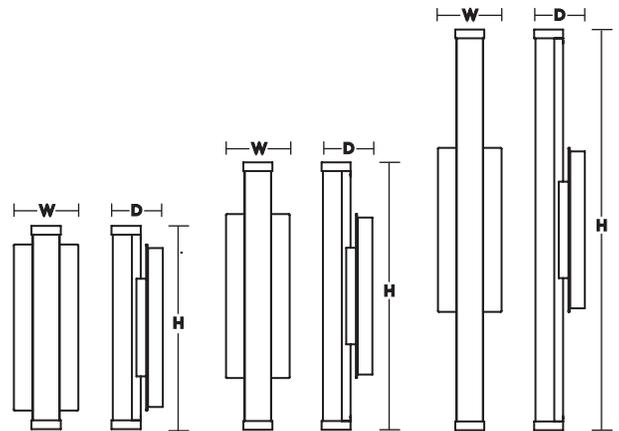

## Ordering Information:

Black	LED	Delivered Lumens	Adjustable CCT	H	W	D
PTHW0618LAJUBK	20W	1320	2700K/3000K/3500K/4000K/5000K	18"	5-3/4"	4-5/8"
PTHW0618LAJUBK-BB	20W	1320	2700K/3000K/3500K/4000K/5000K	18"	5-3/4"	4-5/8"
PTHW0624LAJUBK	24W	1510	2700K/3000K/3500K/4000K/5000K	24"	5-3/4"	4-5/8"
PTHW0624LAJUBK-BB	24W	1510	2700K/3000K/3500K/4000K/5000K	24"	5-3/4"	4-5/8"
PTHW0636LAJUBK	30W	2010	2700K/3000K/3500K/4000K/5000K	36"	5-3/4"	4-5/8"
PTHW0636LAJUBK-BB	30W	2010	2700K/3000K/3500K/4000K/5000K	36"	5-3/4"	4-5/8"