



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Sloane SLL/SLF Series

Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).



Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Satin Nickel or White frame finish.

Diffuser

White diffuser is made of engineered LED acrylic material.

Electrical

Input 120VAC / 60 Hz.

The LED driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

LED

Fixture includes LED modules capable of producing:

26W = 1800 source lumens

39W = 3200 source lumens

3000K (CCT). Rated for 50,000 Hrs., 90 CRI.

Certification

All fixtures are cETLus listed for damp locations.

ENERGY STAR® Qualified



Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions

subject to change without notice.

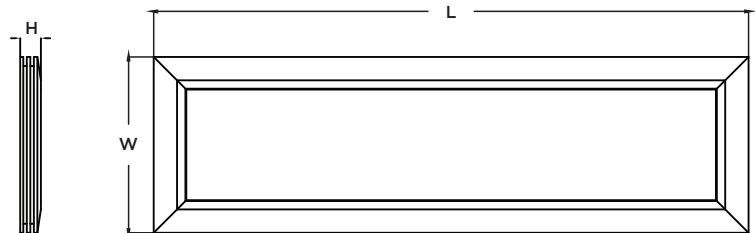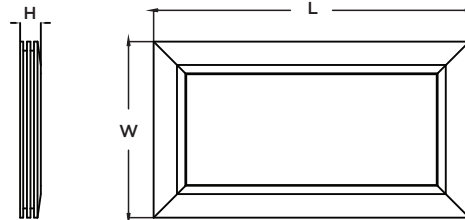

Ordering Information:

Satin Nickel	White	LED	Source Lumens	CCT	L	W	H
SLF12241800L30D1SN	SLF12241800L30D1WH	26W	1800	3000K	27"	15"	2"
SLL12483200L30D1SN	SLL12483200L30D1WH	39W	3200	3000K	50-1/4"	15"	2"

Wall Dimmer Compatibility Chart

Product can be dimmed to 10% of full scale using a standard two-wire dimmer.

Brand	Model #
Lutron®	MACL-153M