



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



LED Undercabinet (Adjustable CCT) T5L2 Series

Features

All purpose direct wire LED undercabinet light. Low profile applications include kitchens, closets, study areas, displays and computer stations. Standard knockouts are located on top, back and ends for direct connection. A direct wire UL listed connector is included for use with 3/8" flexible conduit or 3-wire Romex.

Construction

Housing is die-formed of 22-gauge steel. Separate hinge service tray allows for easy installation and snaps into position without hardware. Power supply connections must be made inside the fixture.

Finish

All exposed metal parts are post painted lighting grade white paint.

Diffuser

Smooth white acrylic diffuser snap-fits into housing.

Electrical

Input 120 VAC / 60 Hz.
TRIAC/ELV Dimming.
On/off switch included.

LED

Integrated LED 3000K/4000K/5000K adjustable color temperature.
Rated 50,000 hrs., 90 CRI.


Certification

Fixtures are cETLus listed for indoor damp locations.
Title 24/JA8 compliant
Certified for use in clothes closet storage space as defined in NEC 410.2, 410.16(A)(3), and 410.16(C)(5)

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

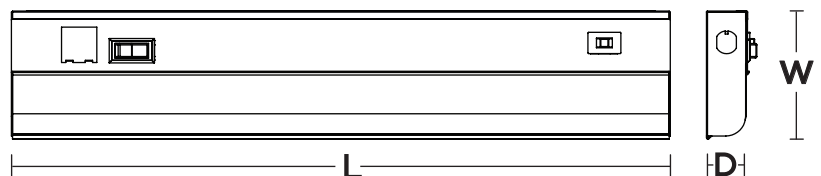

Ordering Information:

Size	White	Type	Lumens 3000K	LPW	L	W	D
9 in.	T5L2-09LAJWH	4.5W SMT-Array	304	68	9"	3-1/2"	1-1/8"
12 in.	T5L2-12LAJWH	4.5W SMT-Array	309	69	12"	3-1/2"	1-1/8"
18 in.	T5L2-18LAJWH	9W SMT-Array	667	75	18"	3-1/2"	1-1/8"
21 in.	T5L2-21LAJWH	9W SMT-Array	701	76	21"	3-1/2"	1-1/8"
24 in.	T5L2-24LAJWH	9W SMT-Array	717	78	24"	3-1/2"	1-1/8"
33 in.	T5L2-33LAJWH	13.5W SMT-Array	1050	79	33"	3-1/2"	1-1/8"
42 in.	T5L2-42LAJWH	18W SMT-Array	1372	79	42"	3-1/2"	1-1/8"

ACCESSORY (ORDER SEPARATELY)

LCX-OCC Occupancy sensor